

BANDEX

CABLE ACCESSORIES



BANDEX

Cable Accessories



WIRING DUCTS 3



CABLE MARKERS 19



CABLE TIES AND ACCESSORIES 25



INSULATING 39



CABLE CLAMPS 43



GLANDS 53



BUSHINGS 63



INSULATING 73



CABLE CLIPS 79



PCB SPACERS AND SUPPORTS 87



FASTENERS 103




COPPER LUGS AND TERMINALS 123

ITEM	PAGE	ITEM	PAGE	ITEM	PAGE	ITEM	PAGE	ITEM	PAGE	ITEM	PAGE
4J-S	46	E	126	LB	124	Oc	23	R	128 ~131	Td	17
A	40	EB	93	LCA	89	OD	16	RBL	14	TE	11
AC	124	ED	64	LCL	99	OM	22	RBT	14	TEE	11
AG	54 56 57	EG	55 56	LCS	98	OMH	23	RC	50	TEI	11
AGJ	54 56	EGL	57	LD3	116	OMJ	23	RCS	109	TEL	11
AGL	57	EM	20	LE	115	OMK	23	RD	14	TEM	11
AP	47	EN	126	LG	117	OMR	23	RDA	13	TEO	11
AT	34	EP	77	LG3	117	OMT	23	RDCV	32	TET	11
ATC	47	ES	93 106 107	LH	117	OS	16	RDE	14	TF	16
AWS	111	EX	16	LHK	118	OSB	68	RF	128	TG	38
				LHN	118	OV	15	RDL	14	TM	45
B	41 125 131	F	125	LK	115			RDM	14	TMS	94
BCS	92	F32	74	LNK	85	PA	60	RDO	14	TP	12
BE	91	FAB	58	LQ	116	PAQ	60	RDT	14	TPE	13
BG	58 ~ 60	FAM	58	LQT	116	PB	36 97	RF	128	TPI	13
BGQ	59	FAP	58	LS	6	PC	44	RH	108	TPL	13
BM	20	FB	124	LV	126 127	PCC	107	RHR	71	TPM	13
BMB	21	FC	48 49	LWS	108	PCL	120	RJ	122	TPO	13
BMS	94	FCP	48	LX	115	PCU	99	RLS	90	TPT	13
BNC	84	FCT	35 48	LY	117	PCV	30	RRCV	35	TR	113
BPC	85	FCW	48			PCVS	30	RS	91	TRW	115
BT	35 95	FD	6	M	41 57	PET	41	RSB	69	TS	47
BWS	107	FMR	22	MA	127	PF	121	RSP	101 102	TT	110
		FR	71	MB	20 64	PFS	49	RST	38	TTB	111
CAP	120			MBC	64	PFVS	30	RT	28	TTU	110
CATV	49	GD	5	MBH	64	PGV	30	RTF	12	TW	114
CC	44	GE	67	MCR	62	PH	102	RTFI	12	TWS	107
CD	10 15	GEC	67	MCS	88	PHC	46	RTFL	12		
CE	125	GECQ	67	MFC	49	PHV	30	RTFM	12	UD	9
CDE	10 15	GEQ	67	MG	59	PIN	126	RTFO	12	USB	70
CDI	10 15	GM	22 67	MGT	34	PL	109	RV	29	UY	122
CDL	10 15	GS	98	MMR	95	PLD	119	RVC	29		
CDM	10 15			MMS	94	PLK	118	RW	114	V	76
CDO	10 15	HBW	113	MNC	81	PLM	119	RWS	108	VC	49
CDT	10 15	HGS	97	MNK	85	PLR	120			VS	21
CDW	114	HL	106	MP	24	PLT	120	S	21		
CF	61	HMS	94	MPM	46	PLU	118	SB	65 66 68	W3F2	75
CL	50	HP	67	MS	21 93	PLW	119	SCM	75	WB	41
CM	21	HPM	78	MSC	58	PLX	119	SCP	78	WBT	41
CR	61	HR	70	MSP	69	PMA	35	SCS	92	WCT	31
CS	88 90	HRCV	33	MT	28	PMT	29	SCT	32	WD	4 7 8
CSA	90	HS	76	MV	29 77	PN	121	SFC	50	WDC	5
CT	26 ~28	HSP	75	MWC	51	PNK	83	SGN	71	WDE	9
CTF	32	HTN	96			PNF	83	SN	100 101	WDI	9
CTHP	37	HTP	96	N	21	PP	83	SNB	42	WDL	9
CTP	36	HTS	95	NC	80	PR	70	SNK	85	WDM	9
CTT	108			NF	81 82	PRVS	30	SP	89	WDO	9
CVS	34	JD	7	NFD	81	PRP	51	SPA	89	WDT	9
CW	51	JWB	105	NFP	81	PS	92	SPB	89	WH	49
		JWS	104	NFR	82	PSP	69	SPC	89	WM	24
DCC	50			NFT	81	PST	97	SPD	89	WMB	24
DCV	32	KCS	96	NG	55 56	PSV	30	SPR	111	WR	113
DF	17	KFC	34	NK	80	PV	30 127	SPS	96	WS	105
DK	33	KT	65	NPT	54	PWS	104	SR	99 ~ 101	WT	17
DL	31	KTV	33	NPTA	56	PWV	30	SRD	15		
DNF	82	KUC	44	NPTL	57	PWVS	30	ST	110	Y	129
DNR	82	KW	132	NT	80 81			STV	31	YF	129
DR	101 109	KWS	104~106			QB	84	SW	40 132		
DS	90					QBS	84	SWC	52		
								SWS	98		

BANDEX Cable Accessories

WIRING DUCTS


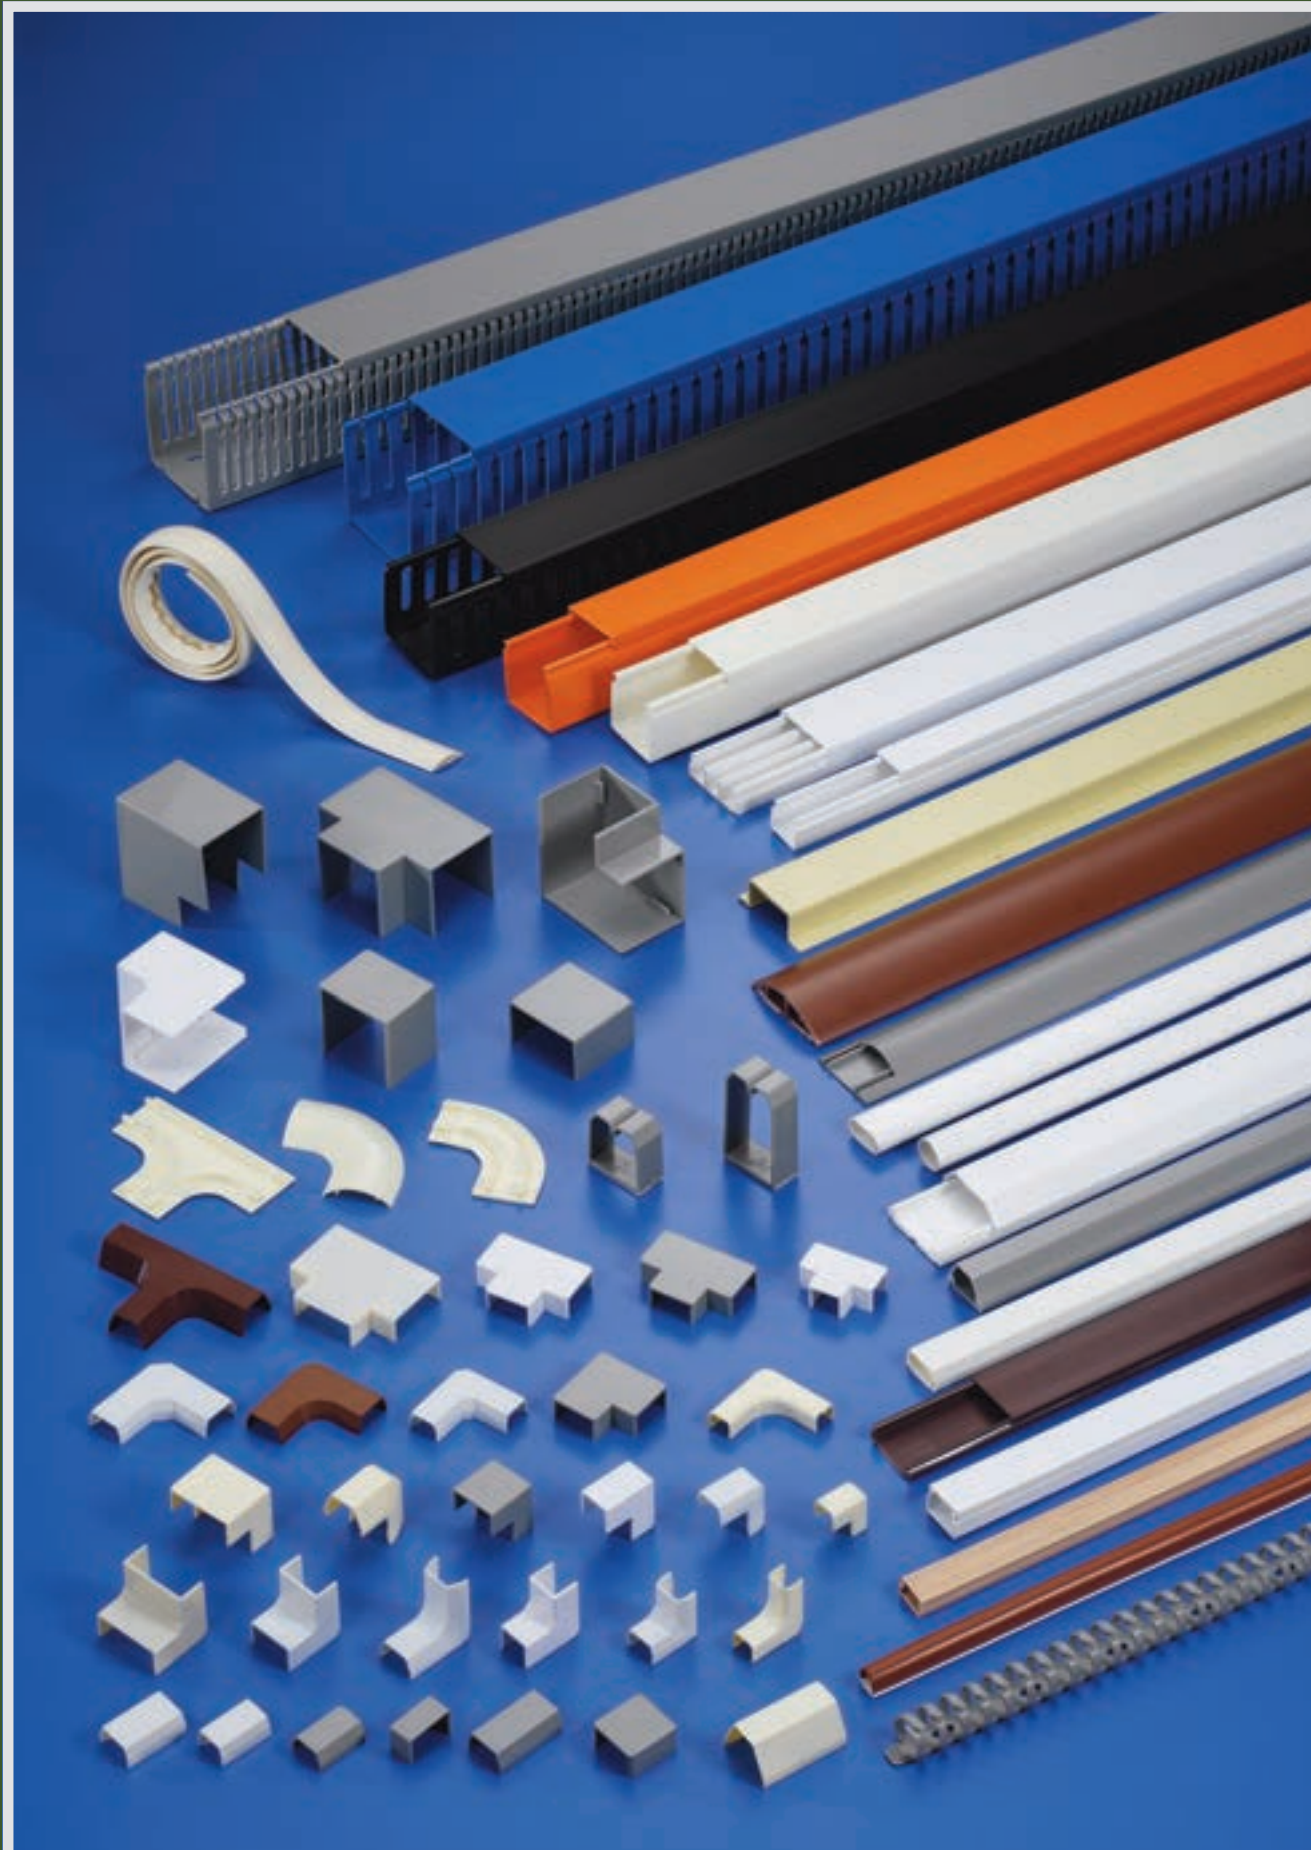


OPEN SLOTTED WIRING DUCTS

Unit: mm

WIRING DUCTS

Size W×H	L	Wires	Part No.		
			4mm	6mm	8mm
15×25		5-12	WD-1525-4		WD-1525-8
20×20		5-12	WD-2020-4		WD-2020-8
25×25		10-25	WD-2525-4		WD-2525-8
25×30		15-25	WD-2530-4		WD-2530-8
25×40		25×25	WD-2540-4		WD-2540-8
25×45		20-25	WD-2545-4	WD-2545-6	WD-2545-8
25×50		20-25			WD-2550-8
25×60		40-45	WD-2560-4		WD-2560-8
25×65		40-45	WD-2565-4	WD-2565-6	WD-2565-8
25×75		60-75			WD-2575-8
25×80		100-120	WD-2580-4		WD-2580-8
30×30		15-25	WD-3030-4		WD-3030-8
33×33		25-45	WD-3333-4	WD-3333-6	WD-3333-8
33×40		40-45	WD-3340-4		WD-3340-8
33×45		40-55	WD-3345-4	WD-3345-6	WD-3345-8
33×65		60-75	WD-3365-4	WD-3365-6	WD-3365-8
33×100		180-200			WD-33100-8
38×25		20-23			WD-3825-8
38×50		60-70			WD-3850-8
38×100	2m	180-200			WD38100-8
40×40		60-70	WD-4040-4	WD-4040-6	WD-4040-8
40×60		100-115	WD-4060-4	WD-4060-6	WD-4060-8
40×80		120-135	WD-4080-4		WD-4080-8
40×100		130-175	WD-40100-4		WD-6545-8
45×45		60-70	WD-4545-4	WD4545-6	WD-4545-8
45×65		110-120	WD-4565-4	WD-4565-6	WD-4565-8
48×60		180-200	WD-4860-4		WD-4860-8
48×100		215-250	WD-48100-4	WD-48100-6	WD-48100-8
50×50		80-90	WD-5050-4		WD-5050-8
50×75		180-200			WD-5075-8
60×40		100-115	WD-6040-4		WD-6040-8
60×60		120-135	WD-6060-4	WD-6060-6	WD-6060-8
60×80		180-210	WD-6080-4		WD-6080-8
65×65		180-200	WD-6565-4	WD-6565-6	WD-6565-8
70×100		250-300			WD-70100-8
72×64		200-220			WD-7264-8
75×50		180-200			WD7550-8

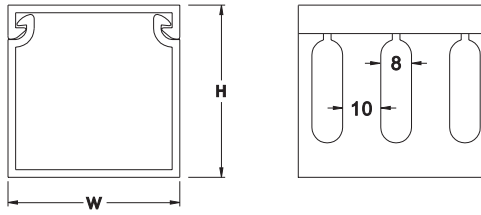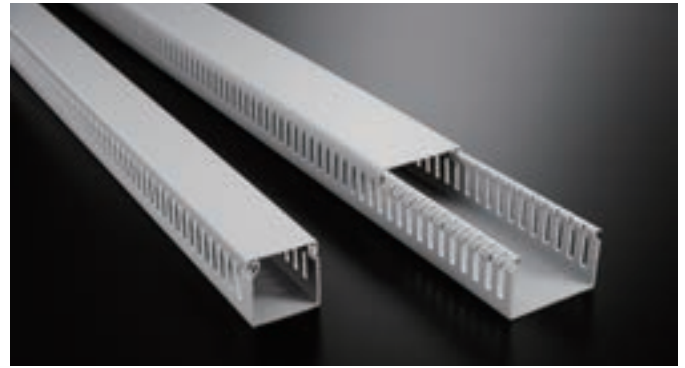

Size W×H	L	Wires	Part No.		
			4mm	6mm	8mm
75×75		200-250			WD-7575-8
75×100		260-320			WD-75100-8
80×60		180-210	WD-8060-4		WD-8060-8
80×80		240-290	WD-8080-4		WD-8080-8
80×100		260-350	WD-80100-4		WD-80100-8
100×40		130-175	WD-10040-4		WD-10075-8
100×50		200-250			WD10050-8
100×60		240-290	WD-10060-4		WD-10060-8
100×75		260-320			WD-10075-8
100×80		260-350	WD-10080-4		WD-10080-8
100×100	2M	300-400	WD-100100-4		WD-100100-8
120×60		240-290	WD-12060-4		WD-12060-8
120×65		260-360	WD-12065-4		WD-12065-8
120×75		280-380			WD-12075-8
120×80		300-400	WD-12080-4		WD-12080-8
150×75		335-500			WD-15075-8
150×100		450-600	WD-150100-4		WD-150100-8
200×100		600-800			WD-200100-8
200×150		1040-1200			WD-200150-8
200×200		1200-1600			WD-200200-8
300×100		1040-1200			WD-300100-8


- Standard colour Grey.
- Available in Black and colours.
- Minimum quantities apply.
- Also available in special cut lengths
- For wiring Duct with score line, add a "V" after part No. For example: WDV-1525

SNAP RIVET

Unit: mm

Part No.	A	B	Panel	Packing
SR-0612K	6.2	12.3	7.0-10.0	1000pcs


- Material: NYLON 66, 94V-2



OPEN SLOT WIRING DUCT

Unit: mm

Part No.	W×H	Wires to be Contained	Length
Slot (4mm)			
BD-2525	25×25	10~25pcs	2M
BD-3340	33×40	40~45pcs	
BD-4040	40×40	50~60pcs	
BD-3360	33×60	60~70pcs	
BD-4860	48×60	110~120pcs	
BD-6060	60×60	120~135pcs	

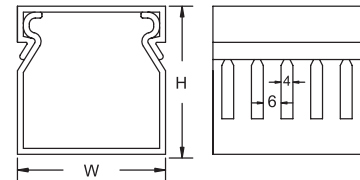


- Material: High impact. Self-extinguishing, warp-proof PVC
- Color: Grey.
- Maximum service temperature: 85°C
- Test to UL file E97527 up to 50°C
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.


OPEN SLOT WIRING DUCT

Unit: mm

Part No.	W×H (mm)	Wires to be Contained	Length
GD-3060	30×60	30~50pcs	2M
GD-4060	40×60	100~115pcs	
GD-6060	60×60	110~120pcs	
GD-8060	80×60	180~210pcs	
GD-10060	100×60	240~290pcs	
GD-12060	120×60	240~290pcs	
GD-3080	30×80	110~115pcs	
GD-4080	40×80	120~135pcs	
GD-6080	60×80	180~210pcs	
GD-8080	80×80	240~290pcs	
GD-10080	100×80	260~350pcs	
GD-12080	120×80	300~400pcs	

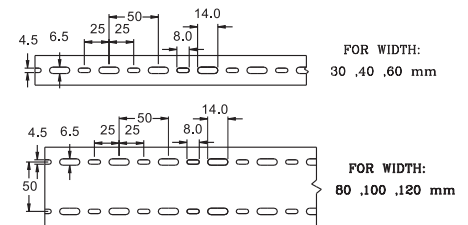


- Material: High impact. Self-extinguishing, warp-proof PVC
- Color: Grey.
- ※ 4.5mm SLOT with score line.

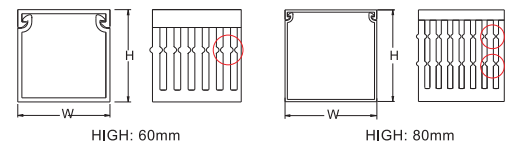

CLOSED SLOTTED WIRING DUCTS

Unit: mm

Part No.	W×H	Wires to be contained	Length
	mm		
WDC-2530-8	25×30	15~25 pcs	2m
WDC-2560-8	25×60	40~45 pcs	
WDC-4040-8	40×40	60~70 pcs	
WDC-4060-8	40×60	100~115 pcs	
WDC-4080-8	40×80	120~135 pcs	
WDC-5050-8	50×50	80~90 pcs	
WDC-6060-8	60×60	120~135 pcs	
WDC-6080-8	60×80	180~210 pcs	
WDC-8080-8	80×80	240~290 pcs	
WDC-100100-8	100×100	300~400 pcs	

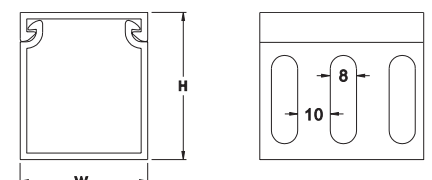

- Close slot design facilitate easy installation or removal of cover.
- Cut optionally wherever wire insertion/extension is necessary.


FLEXIBLE WIRING DUCT

Unit: mm

Part No.	W	H	Wires to be Contained	Length
FD-20	20.4	14.4	5~12 pcs	50cm
FD-30	29	24.9	12~30 pcs	




• Material: NYLON 66

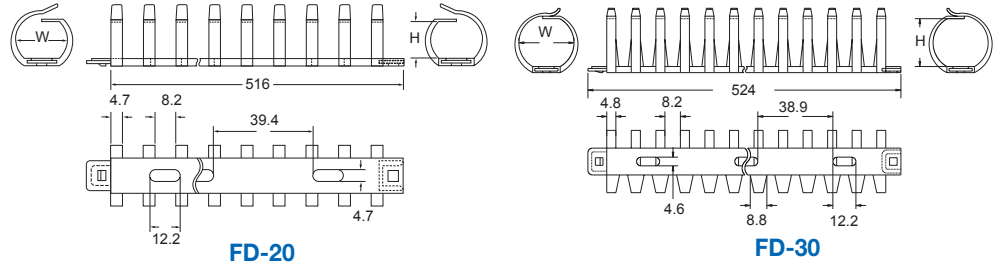

DUCTING LIDS

Unit: mm


Part No.	Size	Length
	mm	
DC-15	15	2m
DC-16	16	
DC-20	20	
DC-25	25	
DC-33	33	
DC-38	38	
DC-40	40	
DC-45	45	
DC-48	48	
DC-50	50	
DC-60	60	
DC-65	65	
DC-70	70	
DC-72	72	
DC-75	75	
DC-80	80	
DC-100	100	
DC-120	120	
DC-150	150	
DC-200	200	

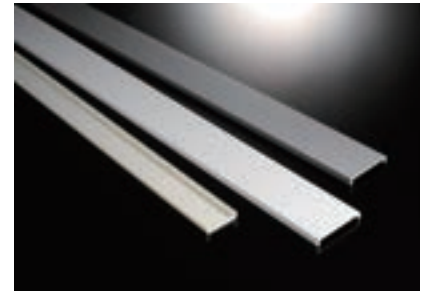

WIRING RETAINER

Unit: mm

Part No.	W×H	Packing
	mm	
LS-2040	20×40	100 pcs
LS-4040	40×40	
LS-7040	70×40	
LS-2065	20×65	
LS-4065	40×65	
LS-6565	65×65	




• Material: ABS • Color: Grey

MINI TRUNKING

Unit: mm

Part No.	W×H	Wires to be	Length
	mm	Contained	
WD-1525-0	15×25	5-12	2m
WD-1616-0	16×16	3-10	
WD-2020-0	20×20	5-12	
WD-2210-0	22×10	3-8	
WD-2516-0	25×16	5-12	
WD-2525-0	25×25	10-25	
WD-2530-0	25×30	15-25	
WD-2540-0	25×40	20-25	
WD-2545-0	25×45	20-25	
WD-2550-0	25×50	20-30	
WD-2560-0	25×60	40-45	
WD-2565-0	25×65	40-45	
WD-2575-0	25×75	50-55	
WD-2580-0	25×80	60-75	
WD-3015-0	30×15	10-25	
WD-3030-0	30×30	20-40	
WD-3333-0	33×33	25-45	
WD-3340-0	33×40	40-45	
WD-3345-0	33×45	40-55	
WD-3365-0	33×65	60-75	
WD-33100-0	33×100	180-200	2m
WD-3775-0	37.5×75	110-115	
WD-3816-0	38×16	12-30	
WD-3825-0	38×25	20-40	
WD-3838-0	38×38	45-50	
WD-3850-0	38×50	20-35	
WD-37100-0	37.5×100	180-200	
WD-4020-0	40×20	20-40	
WD-4040-0	40×40	60-70	
WD-4060-0	40×60	100-115	
WD-4080-0	40×80	120-135	
WD-40100-0	40×100	130-175	



SOLID:

- No slot design, for external wiring or where wire extraction is not necessary.
- Material: High impact, self-extinguishing, warp-proof PVC
- Color: Grey.
- Maximum service temperature: 85°C
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request at reasonable quantity.

SNAP FIT TELEPHONE DUCTING

Unit: mm


Part No.	W1	W2	H	Overall Length	Connector
JD-1	10.4	8.6	8.0	1M With ADHESIVE TAPE BN: Brown (Light Brown) DB: Coffee WE: White MW: Milk LX: light grained DX: dark grained	JDT-1, JDM-1
JD-1BN					JDI-1, JDO-1
JD-1MW					JDL-1, JDE-1
JD-2	14.5	11.5	8.0		JDT-2, JDM-2
JD-2BN					JDI-2, JDO-2
JD-2MW					JDL-2, JDE-2
JD-3	18.8	16.4	10.8	JDT-3, JDM-3	
JD-3BN				JDI-3, JDO-3	
JD-3MW				JDL-3, JDE-3	
JD-4	23.5	19.5	12.2	JDT-4, JDM-4	
JD-4BN				JDI-4, JDO-4	
JD-4MW				JDL-4, JDE-4	



CONNECTORS TYPE:

MID-WAY CONNECTOR: JDM-1
 OUTSIDE CORNER: JDO-1
 'T' TYPE: JDT-1
 'L' TYPE: JDL-1
 INSIDE CORNER: JDI-1


- Material: Rigid, self-extinguishing PVC Backed with high quality self-adhesive tape to facilitate wire application.
- Color: Grey. (Milk, white, brown available on request)
- Length: 1M (2M available upon request)
- Application: Designed to protect wire on floor

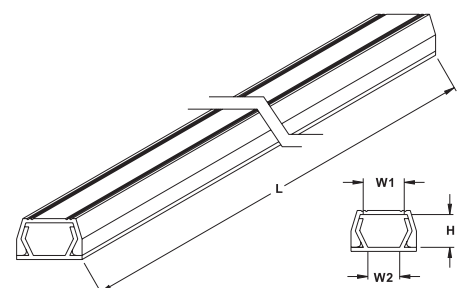

MAXI TRUNKING



Unit: mm



SOLID:

No slot design, for external wiring or where wire extraction is not necessary.

- Material: High impact, self-extinguishing, warp-proof PVC
- Color: Grey.
- Maximum service temperature: 85°C
- Test to UL file E97527 up to 50°C
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request at reasonable quantity.

Part No.	W×H	Wires to be	Length
	mm	Contained	
WD-4545-0	45×45	60-70pcs	2 M
WD-4565-0	45×65	110-120pcs	
WD-48100-0	48×100	215-250pcs	
WD-5025-0	50×25	25-45pcs	
WD-5050-0	50×50	80-90pcs	
WD-5075-0	50×75	180-200pcs	
WD-50100-0	50×100	210-260pcs	
WD-55100-0	55×100	220-260pcs	
WD-6040-0	60×40	100-115pcs	
WD-6060-0	60×60	120-135pcs	
WD-6080-0	60×80	180-210pcs	
WD-60100-0	60×100	240-290pcs	
WD-6545-0	65×45	110-120pcs	
WD-6565	65×65	180-200pcs	
WD-70100-0	70×100	250-300pcs	
WD-7264-0	72×64	200-220pcs	
WD-7540-0	75×40	120-135pcs	
WD-7550-0	75×50	180-200pcs	
WD-7575-0	75×75	200-250pcs	
WD-75100-0	75×100	240-300pcs	
WD-8040-0	80×40	120-135pcs	
WD-8050-0	80×50	180-200pcs	
WD-8060-0	80×60	180-210pcs	
WD-8080-0	80×80	240-290pcs	
WD-80100-0	80×100	260-350pcs	
WD-10030-0	100×30	130-160pcs	
WD-10033-0	100×33	180-200pcs	
WD-10040-0	100×40	180-200pcs	
WD-10050-0	100×50	200-250pcs	
WD-10060-0	100×60	240-290pcs	
WD-10075-0	100×75	260-320pcs	
WD-10080-0	100×80	260-350pcs	
WD-100100-0	100×100	300-400pcs	
WD-12060-0	120×60	240-290pcs	
WD-12065-0	120×65	260-350pcs	
WD-12075-0	120×75	280-380pcs	
WD-12080-0	120×80	300-400pcs	
WD-12575-0	125×75	280-380pcs	
WD-15075-0	150×75	335-500pcs	
WD-150100-0	150×100	450-600pcs	
WD-200100-0	200×100	600-800pcs	
WD-200150-0	200×150	1040-1200pcs	
WD-200200-0	200×200	1200-1600pcs	
WD-300100-0	300×100	1040-1400pcs	

CONNECTORS



A wide range of connectors are available, please contact our office for more details.

Unit: mm

Connectors	Type	Part No.	Used With	Packing
	MID-WAY CONNECTOR	WDM-1616	WD-1616-0	20 pcs
		WDM-2516	WD-2516-0	
		WDM-3816	WD-3816-0	
		WDM-4040	WD-4040-0	
		WDM-5050	WD-5050-0	
		WDM-7575	WD-7575-0	
	OUTSID CORNER	WDO-1616	WD-1616-0	
		WDO-2516	WD-2516-0	
		WDO-3816	WD-3816-0	
		WDO-4040	WD-4040-0	
		WDO-5050	WD-5050-0	
		WDO-7575	WD-7575-0	
	"T" TYPE	WDT-1616	WD-1616-0	
		WDT-2516	WD-2516-0	
		WDT-3816	WD-3816-0	
		WDT-4040	WD-4040-0	
		WDT-5050	WD-5050-0	
		WDT-7575	WD-7575-0	
	"L" TYPE	WDL-1616	WD-1616-0	
		WDL-2516	WD-2516-0	
		WDL-3816	WD-3816-0	
		WDL-4040	WD-4040-0	
		WDL-5050	WD-5050-0	
		WDL-7575	WD-7575-0	
	INSIDE CORNER	WDI-1616	WD-1616-0	
		WDI-2516	WD-2516-0	
		WDI-3816	WD-3816-0	
		WDI-4040	WD-4040-0	
		WDI-5050	WD-5050-0	
		WDI-7575	WD-7575-0	
	END PIECE	WDE-1616	WD-1616-0	
		WDE-2516	WD-2516-0	
		WDE-3816	WD-3816-0	
		WDE-4040	WD-4040-0	
		WDE-5050	WD-5050-0	
		WDE-7575	WD-7575-0	





MINI TRUNKING

Unit: mm

Part No.	W×H	Wires to be Contained	Length
UD-1809WE	18×9	2-6 pcs	2M
UD-1616WE	16×16	3-10 pcs	
UD-2516WE	25×16	5-12 pcs	
UD-4016WE	40×16	20-35 pcs	
UD-4025WE	40×25	20-40 pcs	
UD-5025WE	50×25	25-45 pcs	



- Material: PVC
- Color: White



BANDEX Cable Accessories

COMPUTER DUCTING & RACEWAYS


WIRING DUCTS

Unit: mm


Part No.	W	W1	W2	W3	H	Length
CD-2010-2WE	20.0	7.5	7.5	=	10.3	2M
CD-3010-2WE	30.0	12.5	12.5	=	11.2	
CD-4010-3WE	40.0	11	11.5	11.5	10.3	
CD-5020-3WE	50.8	14.8	10	14.8	20.3	
CD-10040-3WE	100	32.8	23.2	32.8	40	
※CD-11060WE	111	43.3	16	43.3	61.4	




- Material: High impact. Self-extinguishing, warp-proof PVC
- Color: White
- Maximum service temperature: 85°C
- Features parallel holes on both sidewalls to facilitate cutting in wire application.




CD-2010-2WE
CD-3010-2WE




CD-4010-3WE



CD-5020-3WE



CD-10040-3WE



CD-11060WE

WIRING DUCT CONNECTOR

Unit: mm

Connectors	Type	Part No.	Used With	Packing
	MID-WAY CONNECTOR	CDM-2010WE	CD-2010-2WE	20 pcs
		CDM-3010WE	CD-3010-2WE	
		CDM-4010WE	CD-4010-3WE	
		CDM-5020WE	CD-5020-3WE	
	"T" TYPE	CDT-2010WE	CD-2010-2WE	20 pcs
		CDT-3010WE	CD-3010-2WE	
		CDT-4010WE	CD-4010-3WE	
		CDT-5020WE	CD-5020-3WE	
	INSIDE CORNER	CDI-2010WE	CD-2010-2WE	20 pcs
		CDI-3010WE	CD-3010-2WE	
		CDI-4010WE	CD-4010-3WE	
		CDI-5020WE	CD-5020-3WE	
	OUTSIDE CORNER	CDO-2010WE	CD-2010-2WE	20 pcs
		CDO-3010WE	CD-3010-2WE	
		CDO-4010WE	CD-4010-3WE	
		CDO-5020WE	CD-5020-3WE	
	"L" TYPE	CDL-2010WE	CD-2010-2WE	20 pcs
		CDL-3010WE	CD-3010-2WE	
		CDL-4010WE	CD-4010-3WE	
		CDL-5020WE	CD-5020-3WE	
	END PIECE	CDE-2010WE	CD-2010-2WE	20 pcs
		CDE-3010WE	CD-3010-2WE	
		CDE-4010WE	CD-4010-3WE	
		CDE-5020WE	CD-5020-3WE	





- Material: ABS
- Color: White

DECORATION DUCTING

Unit: mm

Part No.	W	H	Wire to be Contained	Length
TE-1	12.7 (1/2")	11	1-4	2M
TE-2	19.0 (3/4")	11	2-6	
TE-3	25.4 (1")	11	5-9	
TE-4	31.8 (1 1/4")	11	6-12	
TE-5	38.1 (1 1/2")	11	10-18	
TE-6	50.8 (2")	11	15-25	
TE-11	12.7 (1/2")	11	1-4	1M BN: Brown (Light Brown) DB: Coffee WE: White MW: Milk LX: light grained DX: dark grained
TE-11BN				
TE-11DB				
TE-11WE				
TE-11MW				
TE-11LX				
TE-11DX				
TE-21	19.0 (3/4")	11	2-6	
TE-21BN				
TE-21DB				
TE-21WE				
TE-21MW				
TE-21LX				
TE-21DX				
TE-31	25.4 (1")	11	5-9	
TE-31BN				
TE-31DB				
TE-31WE				
TE-31MW				
TE-31LX				
TE-31DX				
TE-41	31.8 (1 1/4")	11	6-12	
TE-51	38.1 (1 1/2")	11	10-18	
TE-61	50.8 (2")	11	15-25	

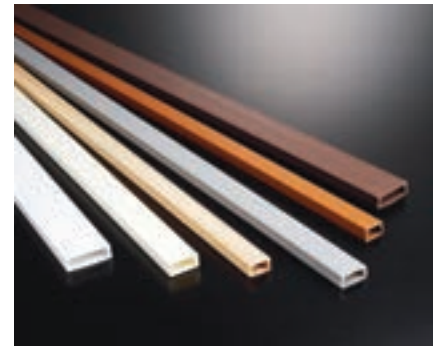

- Material: Rigid, self-extinguishing PVC
- Standard Color: Grey.
- Feature: All sizes feature same height in 11mm which were specially designed for flat cables.
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.

DECORATION WIRING DUCT CONNECTOR

Unit: mm

Connectors	Type	Part No.	Used With	Packing	Standard Color
	MID-WAY CONNECTOR	TEM-1	TE-1	20 pcs	Grey For Color Add Code To Part No. i.e. TET-2MW MW: Milk WE: White BN: Brown DB: Coffee (dark Brown)
		TEM-2	TE-2		
		TEM-3	TE-3		
		TEM-4	TE-4		
	"T" TYPE	TET-1	TE-1		
		TET-2	TE-2		
		TET-3	TE-3		
		TET-4	TE-4		
	INSIDE CORNER	TEI-1	TE-1		
		TEI-2	TE-2		
		TEI-3	TE-3		
		TEI-4	TE-4		
	OUTSIDE CORNER	TEO-1	TE-1		
		TEO-2	TE-2		
		TEO-3	TE-3		
		TEO-4	TE-4		
	"L" TYPE	TEL-1	TE-1		
		TEL-2	TE-2		
		TEL-3	TE-3		
		TEL-4	TE-4		
	END PIECE	TEE-1	TE-1		
		TEE-2	TE-2		
		TEE-3	TE-3		
		TEE-4	TE-4		



- Material: ABS


ONE PIECE WIRING DUCT

Unit: mm

Part No.	W	W1	H	H1	Length	Connector
RTF10WE	13.1	11.6	10.8	8.2	1.5M	RTFL-10WE "L" TYPE RTFI-10WE INSIDE RTFO-10WE "T" TYPE RTFM-10WE MID-WAY



• Material: PVC




TELEPHONE DUCTING




Unit: mm

Part No.	W1	W2	H1	Wire to be Contained
TP-1	6	7	4	1 pcs
TP-1BN				
TP-1DB				
TP-1WE				
TP-1MW				
TP-1LX				
TP-1DX				
TP-1.5	6	8	7.4	1~2 pcs
TP-1.5BN				
TP-1.5MW				
TP-1.5LX				
TP-1.5DX				
TP-2	8	8	6	2~3 pcs
TP-2BN				
TP-2DB				
TP-2WE				
TP-2MW				
TP-2LX				
TP-2DX				
TP-3	10	10	7	3~4 pcs
TP-3BN				
TP-3DB				
TP-3WE				
TP-3MW				
TP-3LX				
TP-3DX				
TP-4	12	15	10	4~7 pcs
TP-4BN				
TP-4DB				
TP-4WE				
TP-4MW				
TP-4LX				
TP-4DX				
TP-5	10	17	13	7~9 pcs
TP-5BN				
TP-5DB				
TP-5WE				
TP-5MW				
TP-5LX				
TP-5DX				

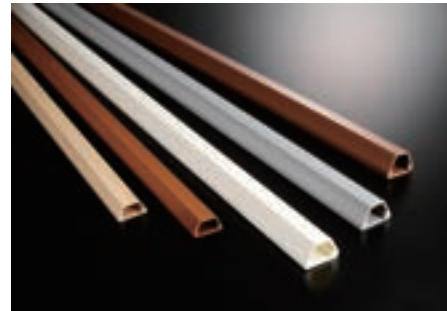

MW: Milk
WE: White
BN: Brown
(Light Brown)
DB: Coffee
LX: light grained
DX: dark grained



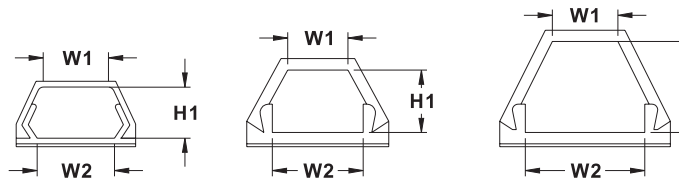



Part No.	W1	W2	H1	Wire to be Contained
TP-6	11	19	16	10~15 pcs
TP-6BN				
TP-6DB				
TP-6WE				
TP-6MW				
TP-6LX				
TP-6DX				
TP-8	30	37	16	30~40 pcs
TP-8BN				
TP-8DB				
TP-8WE				
TP-8MW				
TP-8LX				
TP-8DX				




- Material: Rigid, self-extinguishing PVC Backed with high quality self-adhesive tape to facilitate wire application.
- Color: Grey.
- Length: 1M (2M available upon request)
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.

TELEPHONE WIRING DUCT CONNECTOR

Unit: mm

Connectors	Type	Part No.	Used With	Packing	Standard Color
	MID-WAY CONNECTOR	TPM-1	TP-1	20 pcs	Grey For Color Add Code To Part No. i.e. TPT-2MW MW: Milk WE: White BN: Brown DB: Coffee (Dark Brown)
		TPM-2	TP-2		
		TPM-3	TP-3		
		TPM-4	TP-4		
		TPM-5	TP-5		
		TPM-6	TP-6		
	"T" TYPE	TPT-1	TP-1		
		TPT-2	TP-2		
		TPT-3	TP-3		
		TPT-4	TP-4		
		TPT-5	TP-5		
		TPT-6	TP-6		
	INSIDE CORNER	TPI-1	TP-1		
		TPI-2	TP-2		
		TPI-3	TP-3		
		TPI-4	TP-4		
		TPI-5	TP-5		
		TPI-6	TP-6		
	OUTSIDE CORNER	TPO-1	TP-1		
		TPO-2	TP-2		
		TPO-3	TP-3		
		TPO-4	TP-4		
		TPO-5	TP-5		
		TPO-6	TP-6		
	"L" TYPE	TPL-1	TP-1		
		TPL-2	TP-2		
		TPL-3	TP-3		
		TPL-4	TP-4		
		TPL-5	TP-5		
		TPL-6	TP-6		
	END PIECE	TPE-1	TP-1		
		TPE-2	TP-2		
		TPE-3	TP-3		
		TPE-4	TP-4		
		TPE-5	TP-5		
		TPE-6	TP-6		

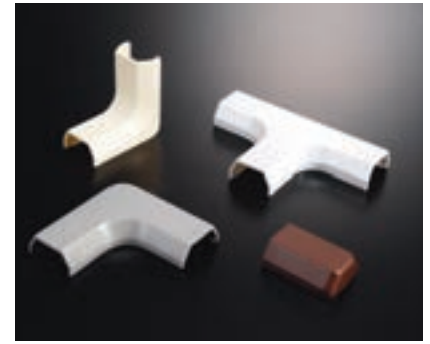


• Material: ABS

ROUND FLOOR DUCTING

Unit: mm

Part No.	W	W1	H	H1	Length
RDA-30	28.8	11.0	7.4	5.2	1M
RDA-30BN					
RDA-30MW					
RDA-40	38.5	18.8	11.5	8.5	With ADHESIVE TAPE BN: Brown MW: Milk LX: Light grained DX: Dark grained
RDA-40BN					
RDA-40MW					
RDA-50	50.0	20.3	12.3	8.8	
RDA-50BN					
RDA-50MW					
RDA-60	60.0	33.3	13.8	10.7	
RDA-60BN					
RDA-60MW					




- Material: High impact, rigid, self-extinguish PVC
 - Maximum service temperature: 85°C
 - Color: Grey. (white, milk, brown, dark brown available)
 - Backed with high quality double sided tape for permanent stick. Good for floor wiring to facilitate trolley pass and to avoid trip.
- ※ This product has similar function with RD-duct except for some difference in out look appearance.

ROUND FLOOR DUCTING

Unit: mm

Part No.	W	H1	H	H1	Length	Connector Part No.	Connector Part No.
RD-20	20	8	6	4	1M With ADHESIVE TAPE MW: Milk BN: Brown (Light Brown) LX: light grained DX: dark grained	RDT-20, RDM-20 RDI-20, RDO-20 RDL-20, RDE-20	RBL-20, RBT-20
RD-20BN							
RD-20MW							
RD-20LX							
RD-20DX							
RD-30	30	11	8	6		RDT-30, RDM-30 RDI-30, RDO-30 RDL-30, RDE-30	RBL-30, RBT-30
RD-30BN							
RD-30MW							
RD-30LX							
RD-30DX							
RD-40	40	16	9.5	7		RDT-40, RDM-40 RDI-40, RDO-40 RDL-40, RDE-40	RBL-40, RBT-40
RD-40BN							
RD-40MW							
RD-40LX							
RD-40DX							
RD-50	50	20	11	8		RDT-50, RDM-50 RDI-50, RDO-50 RDL-50, RDE-50	RBL-50, RBT-50
RD-50BN							
RD-50MW							
RD-50LX							
RD-50DX							
RD-60	60	30	13	9		RDT-60, RDM-60 RDI-60, RDO-60 RDL-60, RDE-60	RBL-60, RBT-60
RD-60BN							
RD-60MW							
RD-60LX							
RD-60DX							
RD-70	70	40	15	10	RDT-70, RDM-70 RDI-70, RDO-70 RDL-70, RDE-70	RBL-70, RBT-70	
RD-70BN							
RD-70MW							
RD-70LX							
RD-70DX							
RD-90	90	45	19	15	RDT-90, RDM-90 RDI-90, RDO-90 RDL-90, RDE-90	RBL-90, RBT-90	
RD-90BN							
RD-90MW							
RD-90LX							
RD-90DX							
RD-120	120	70	25	21	RDT-120, RDM-120 RDI-120, RDO-120 RDL-120, RDE-120	RBL-120, RBT-120	
RD-120BN							
RD-120MW							
RD-120LX							
RD-120DX							

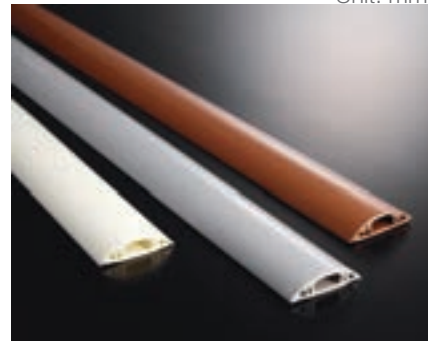

CONNECTOR COVER TYPE:

MID-WAY CONNECTOR : RDM-20

"L" TYPE : RDL-20

OUTSIDE CORNER : RDO-20

INSIDE CORNER : RDI-20


"T" TYPE : RDT-20

END PIECE : RDE-20


CONNECTOR BASE TYPE :

"L" TYPE : RBL-60

"T" TYPE : RBT-60



RD-20,30,40,50,60

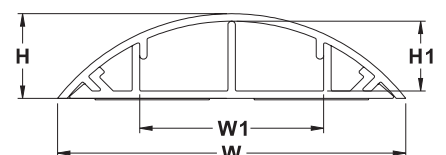

RD-70,90,120

- Material: High impact, rigid, self-extinguish PVC
- Maximum service temperature: 85°C
- Color: Grey. (white, milk, brown, dark brown available)
- Backed with high quality double sided tape for permanent stick. Good for floor wiring to facilitate trolley pass and to avoid trip.


SOFT WIRING DUCT

Part No.	W	W1	H	H1	Length	
SRD-251	25.4	7.4	5.8	3.8	1M	
SRD-251BN						
SRD-251MW						
SRD-251BK						
SRD-501	50.8	14.8	11.6	7.8		
SRD-501BN						
SRD-501MW						
SRD-501BK						
SRD-651	66	19	15.3	10.9		With ADHESIVE TAPE BN: Brown MW: Milk BK: Black
SRD-651BN						
SRD-651MW						
SRD-651BK						
SRD-751	76.2	22	17.4	11.6		
SRD-751BN						
SRD-751MW						
SRD-751BK						
SRD-1001	101.6	29.4	23.2	15.4		
SRD-1001BN						
SRD-1001MW						
SRD-1001BK						
SRD-25	25.4	7.4	5.8	3.8	6 feet (183 cm) with Adhesive tape	
SRD-25BN						
SRD-25MW						
SRD-25BK						
SRD-50	50.8	14.8	11.6	7.8		
SRD-50BN						
SRD-50MW						
SRD-50BK						



- Unit: mm
- Material: PVC
 - Soft pvc products, packed in rolls for easy storage.
 - Cut to required length for temporary wiring or permanent application. Can be supplied with double sided tape.



Part No.	W	W1	H	H1	Length
SRD-65	66	19	15.3	10.9	6 feet (183 cm) with Adhesive tape
SRD-65BN					
SRD-65MW					
SRD-65BK					
SRD-75	76.2	22	17.4	11.6	
SRD-75BN					
SRD-75MW					
SRD-75BK					
SRD-100	101.6	29.4	23.2	15.4	
SRD-100BN					
SRD-100MW					
SRD-100BK					

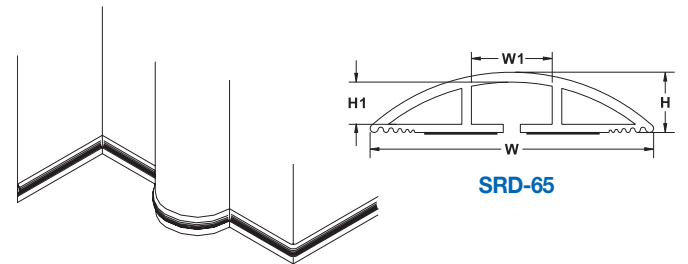

COVERING DUCT

Part No.	W	W1	H	H1	Length
CD-3820YW1	67.2	38	22.3	19.8	1.2M


- Material: PVC

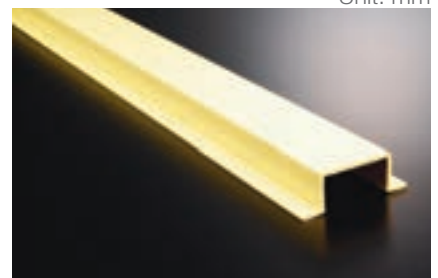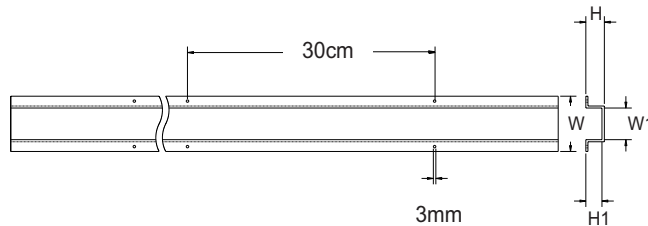

OVAL INSULATING TUBE

Part No.	W	H	L
OV-13IY	11.0	5.9	2M
OV-16IY	14.9	7.9	
OV-20IY	20.6	9.8	
OV-25IY	25.2	11.8	

- Material: PVC (IVORY)

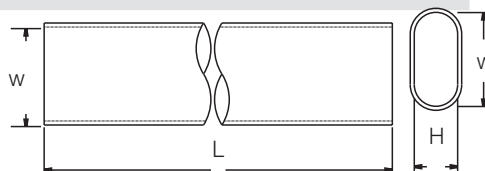


ROUND INSULATING TUBE

Unit: mm

Part No.	D	D1	L
OD-20IY	16.2	20	2M
OD-25IY	21	25	



- Material: PVC (IVORY)

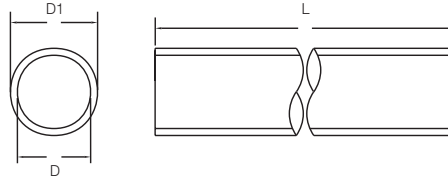


WIRING DUCTS

Unit: mm

Part No.	A mm	B mm	C mm	D mm	L
EX-1	10.9	24.8	21.6	28.2	2M



- Material: PVC (Grey)
- Snap in design lock into the stand aluminum frame, perfect.
- For containing wire inside professionally.

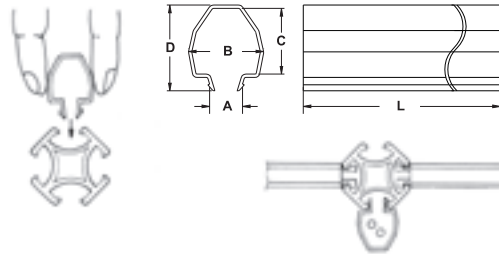


ONE PIECE WIRING DUCT

Unit: mm

Part No.	W	H	Length
TF-0905IY	9.2	2.9	2M
TF-1313IY	13.2	10.8	2M



- Material: Rigid, self extinguishing PVC. Temperature endurance up to 85°C.
- One piece design. Combines duct base together with its lip. Easy for application and save work time.




ONE PIECE WIRING DUCT

Unit: mm

Part No.	W	H	Length
OS-2012TWE	20.3	11.9	6 feet (183cm)
OS-4020TWE	38.8	19.3	
OS-6322TWE	62.8	22	



- Material: Rigid, self-extinguishing PVC . Temperature endurance up to 85°C.
- One-piece surface raceway is a single channel designed to route, protect and conceal voice, video or power cabling, can be opened and closed repeatedly without cracking.
- Factory applied adhesive backing speeds installation.


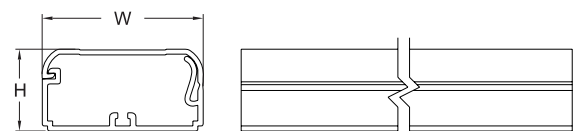


U TYPE WIRING DUCT

Unit: mm

Part No.	Length	Suitable
TD-1	2M	6.5

- Material: Transparent PVC
- Application: Peel off the adhesive tape and stick to clean, oil-free surface. Snap wire into the duct with fingertip pressure.

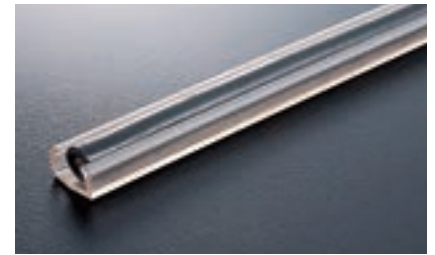


DOUBLE-COATED FOAM TAPE

Unit: mm

Part No.	mm	Packing
DF-8	8	50M
DF-13	13	
DF-18	18	
DF-23	23	
DF-28	28	30M

- Duct tape with high-performance adhesive to secure surface installation.
- Design to meet all industry demands and applications.

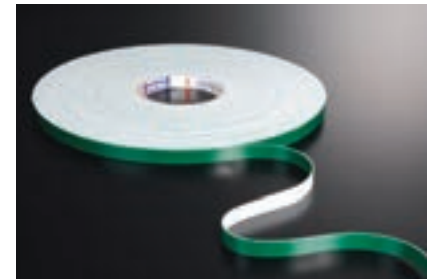


WIRING DUCT CUTTING TOOL

Part No. : WT-1

Part No. : WT-2



Part No. : WT-2

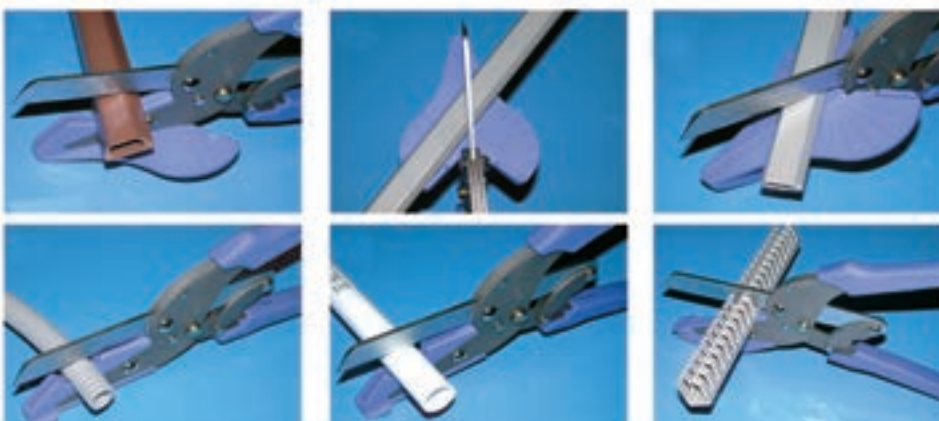

BANDEX Cable Accessories

CABLE MARKERS




CM TYPE CALBE MARKER

Unit: mm

Part No.	Wires suitable		Std. Markings	Packing
	Sq	mm		
CM-0.75	0.75	3.0	0,1,2,3, ...9 A,B,C, ...Z, +, -, ≡, /, blank	100pcs/bag
CM-1.25	1.25	3.2		
CM-2.0	2.0	3.6		
CM-3.5	3.5	4.2		
CM-5.5	5.5	5.1		
CM-8	8	6.2		




- Material: Rigid PVC
- Clip on design.
- Can be applied after wire termination.
- Maximum service temp: 85°C



SIDE ON TYPE MARKER

Unit: mm

Part No.	Suitable Wire sq	Size			Std. Markings	Packing
		L	Ø1	Ø2		
VS-1	0.95~1.3	2.3	0.9	1.7	+, - 0, 1, 2, ... 9 A,B,C,...Z	30 pcs/stick
S-1	0.5	3.0	1.8	2.8		
N-1	0.75	3.0	2.7	3.9		
	0.9					
N-2	1.25	3.0	3.2	4.6		
	2.0					
N-3	3.5	3.0	4.4	5.8		
	5.5					




MARKER STRIPS

Unit: mm

Part No.	L	W	T	Available loaded quantity of GM-1 Cable Marker	Length
MS-65	65	9	6.7	9pcs	100pcs
MS-100	100	9	6.95	16pcs	
MS-135	135	9	7	23pcs	
MS-135L	135	9	13	23pcs	

- NYLON 66 PLATE with cable tie fastening hole to accommodate marker pieces for easy identification of cable runs.



MARKER BOX

Unit: mm


Part No.	Available loaded quantity of BM Cable Marker	Material
BMB-1	13 pcs	Acrylic




OM TYPE MARKER

Unit: mm


Part No.	Cable Dia		L	Std. Markings	Packing
	Sq	mm			
OM-22S	22	1.3	10	OM-1.25 OM-2.0 0,1,2, ...100 A,B, ...Z +,-,≡,/, blank	100pc
OM-20S	20	1.5			
OM-18S	18	1.8			
OM-16S	16	1.9			
OM-0.75	0.75	3.0			
OM-1.25	1.25	3.2			
OM-2.0	2.0	3.6			
OM-3.5	3.5	4.2			
OM-5.5	5.5	5.1			
OM-8	8	6.2			
OM-14	14	7.6			
OM-22	22	9.1			



- Material: Soft PVC
- Sleeve on design.
- Apply before wire termination.



* Special Marking is available upon request.



FLAT MARKER TUBE

Unit: mm

Part No.	OUT Dia	Cable Dia	Packing
FMR-3	3.5	2	100M/roll
FMR-4	4.8	3	
FMR-6	6.8	4.2	
FMR-8	8.0	5	
FMR-13	13.0	8	
FMR-18	18.0	11	50M/roll




- Material: Soft PVC

U TYPE CABLE MARKER

Unit: mm

Part No.	Suitable wire sq	L	H	W	W1	Packing
UM-1	1.25~2.0	12.6	4.3	4.4	3.0	100pcs

- Material: PP
- Color: Pink (PK1), Blue (BE1), Yellow (YW1), Green (GN1), Purple (VT1).
- Different colors for easy verification of wire function.



GM TYPE MARKERS

Unit: mm

Part No.	Cable Dia		Marker Length	Std. Markings	Packing
	sq	mm			
GM-1	2~8	3.5~7.0	5	0,1,2,3, ...9 A,B,C, ...Z, +,-,≡,/, blank	500pcs

- GM CABLE MARKER with its unique oval shape design provide
 - 1.slip over cable directly (for small cable)
 - 2.slip onto marker strip (for larger cable or cable bundles)



O TYPE MARKER TUBE

Unit: mm

Part No.	Cable Dia		Packing
	Sq	mm	
OMR-0.75	0.75	3.0	100M/roll
OMR-1.25	1.25	3.2	
OMR-2.0	2.0	3.6	
OMR-3.5	3.5	4.2	
OMR-5.5	5.5	5.1	
OMH-1.25	1.25	3.2	500M/roll
OMH-2.0	2.0	3.6	
OMH-3.2	3.5	4.2	
OMK-0.75	0.75	3.0	1000M/box
OMK-1.25	1.25	3.2	
OMK-2.0	2.0	3.6	


- Material: Soft PVC

Part No.	Cable Dia	Packing
OMJ-1.5	2.8	200M/roll
OMJ-2.5	4.0	
OMJ-4.0	4.5	

- Material: Soft PVC (bright White)
- Color available in bright Yellow, bright red.

Part No.	Cable Dia	Packing
OMT-2.5	2.5	200M/roll
OMT-3.0	3.0	
OMT-3.2	3.2	
OMT-3.5	3.5	
OMT-4.0	4.0	
OMT-4.5	4.5	
OMT-5.0	5.0	100M/roll
OMT-5.5	5.5	

- Material: Soft PVC

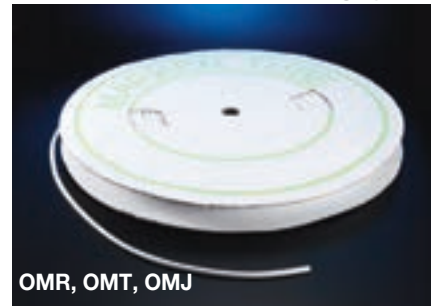

OC TYPE CABLE MARKER


Unit: mm

Part No.	Wires suitable		Std. Markings	Packing
	Sq	mm		
OC-1	0.5~0.75	2.5~3.0	0,1,2,3, ...9 A,B,C, ...Z, +, -, =, /, blank	1000 pcs
OC-2	1.25~2.0	3.2~3.6		
OC-2L	1.25~2.0	3.2~3.6		
OC-3	3.5~5.5	4.2~5.1		500pcs
OC-4	5.5~8.0	5.1~6.2		300pcs
OC-8	14.0	7.5~8.0		

- Material: Rigid PVC
- Maximum service temperature: 85°C
- Standard color: White body marker in black.

Description

- To be fitted after termination. May be removed without breaking the terminal connection.
- O shape design to prevent marker conflict of close wire termination.
- Clip on design enable it to grip wire/cable firmly in position after termination attached.
- Each marker will accommodate multiple wire sizes.



Standard design

OC-8


MARKER PLATE

Unit: mm


Part No.	L	W	T	Packing
MP-1626	26	15.2	1.2	100pcs/bag
MP-2040	42.2	21.2	1.2	
MP-2560	60.8	25.2	1.2	
MP-5060	62.2	51.5	1.3	
MP-1938	38.5	19.1	0.4	
MP-1944	45.3	19.1	0.4	
MP-5019	50.5	19.1	0.4	
MP-1963	65	19.1	0.4	
MP-6344	63.8	44.8	0.4	
MP-8819	90.0	19.1	0.4	




- Material: Nylon. (Natural)
- Used to mark cable bundles for permanent identification.
- Secured with cable ties extensively from CT075-2C to CT200-4C in variety of ways.




MP-2560




MP-5060, MP-6344



MP-1626



MP-1938/1944/5019/1963
MP-8819




MP-2040

SELF ADHESIVE WIRE MARKER

Unit: mm

Part No.	L	W	Std. Markings	Packing
WM-1	25	6.5	Solid: 0, 1, 2, 3, ... 9 10, 11, 12, ... 100 A, B, C, ..., Z, +, -, = Consecutive Number: 0~9, 1~34, 35~67, 68~100, A~Z	50pcs/box
WM-2	25	6.5	blank	50pcs/box
WM-3	40	10		
WMB-1	25	6.5	0~9@1page	
WMB-2	25	6.5	(A~Z, /, +, -, 0~15) × 10page	
WMB-3	25	6.5	(1~45) × 10page	

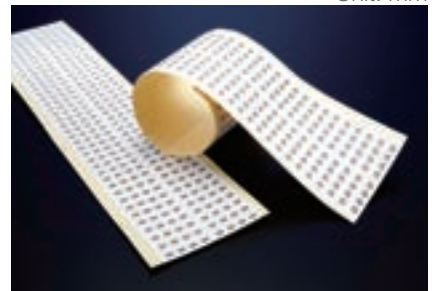

BOOK SIZE: L: 143 W: 82

- Stick to wires for permanent identification.
- Used extensively for cable diameters after or before terminal is attached.
- Cloth type lable.
- For your orders, please specify solid or consecutive and what letter (s), number (s) you need.


For example: Solid: WM-1 1.2.A,B,...10pcs each.
consecutive: WM-1 0-9, A-Z,...10pcs each.




SOLID NUMBER



SOLID LETTERS





CONSECUTIVE NUMBERS(0~9)



CONSECUTIVE NUMBERS (1~34)



CONSECUTIVE LETTERS (A~Z)

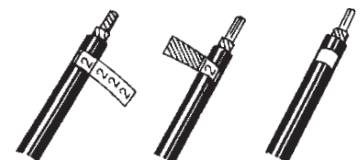

BANDEX Cable Accessories

CABLE TIES AND ACCESSORIES




MINIATURE CABLE TIES



Width 2.5mm/0.10inch, tensile strength 8kg/18lbs

Unit:mm

Part No.		Size		Bundle dia.	
100 pcs pk	1000 pcs pk	mm	inch	mm	inch
CT-060-2C	CT-060-2K	63.7×2.4	2 1/2×0.10	11	0.44
CT-075-2C	CT-075-2K	75×2.4	3×0.10	18	0.72
CT-080-2C	CT-080-2K	80×2.4	3 1/8×0.10	16	0.64
CT-094-2C	CT-094-2K	94×2.5	3 3/4×0.10	23	0.92
CT-100-2C	CT-100-2K	100×2.5	4×0.10	25	1.00
CT-120-2C	CT-120-2K	120×2.5	4 3/4×0.10	30	1.20
CT-140-2C	CT-140-2K	140×2.5	5 1/2×0.10	35	1.40
CT-150-2C	CT-150-2K	150×2.5	6 1/8×0.10	39	1.56
CT-165-2C	CT-165-2K	160×2.5	6 1/2×0.10	44	1.76
CT-200-2C	CT-200-2K	200×2.5	8×0.10	55	2.20
CT-400-2C		400×2.5	15 3/4×0.10	116	4.64




INTERMEDIATE CABLE TIES



Width 3.2-3.6mm/0.12-0.14 inch, tensile strength 18kg/40lbs

Unit:mm

Part No.		Size		Bundle dia.	
100 pcs pk	1000 pcs pk	mm	inch	mm	inch
CT-120-3C	CT-120-3K	120×3.2	4 3/4×0.12	30	1.2
CT-140-3C	CT-140-3K	142×3.2	5 1/2×0.12	35	1.4
CT-150-3C	CT-150-3K	150×3.6	6×0.14	39	1.56
CT-180-4C	CT-180-4K	180×3.6	7×0.14	46	1.84
CT-200-3C	CT-200-3K	203×3.2	8×0.12	55	2.2
CT-200-3LC	CT-200-3LK	203×3.6	8×0.14	55	2.2
CT-250-3C	CT-250-3K	250×3.6	10×0.14	74	2.96
CT-265-3C	CT-265-3K	265×3.6	10 1/2×0.14	78	3.07
CT-292-3C	CT-292-3K	292×3.6	11 1/2×0.14	85	3.4
CT-330-3C		331×3.6	13×0.14	96	3.78
CT-370-3C		368×3.6	14 1/2×0.14	102	4.08




STANDARD CABLE TIES



Width 4.0-4.8mm/0.18~0.19inch, tensile strength 22kg/50lbs

Unit:mm

Part No.		Size		Bundle dia.	
100 pcs pk	1000 pcs pk	mm	inch	mm	inch
CT-120-4C	CT-120-4K	120×4.8	4 3/4×0.19	30	1.20
CT-160-4C	CT-160-4K	160×4.8	6 1/4×0.19	42	1.68
CT-190-4C	CT-190-4K	190×4.8	7 1/2×0.19	52	2.08
CT-200-4C	CT-200-4K	203×4.6	8×0.18	55	2.20
CT-250-4C		250×4.8	10×0.19	74	2.96
CT-280-4C		280×4.8	11×0.19	81	3.24
CT-300-4C		300×4.8	11 1/16×0.19	85	3.40
CT-310-4C		310×4.8	12×0.19	89	3.56
CT-370-4C		368×4.8	14 1/2×0.9	102	4.08
CT-385-4C		385×4.8	15 3/16×0.19	116	4.64
CT-432-4C		432×4.8	17×0.19	125	5.00
CT-450-4C		450×4.8	17 3/4×0.19	130	5.12
CT-500-4C		500×4.8	17 11/16×0.19	150	5.91
CT-550-4C		550×4.8	21 11/16×0.19	162	6.48
CT-914-4C		914×4.8	36×0.19	270	10.8
CT-610-4C		610×4.8	24×0.19	181	7.24
CT-635-4C		635×4.8	25×0.19	189	7.56



※ CT380-6C width 6.4mm/0.26inch, tensile strength 45kg/100lbs


HEAVY DUTY CABLE TIES



Width 7.6mm/0.30inch, tensile strength 55kg/120lbs

Unit:mm

Part No. 100 pcs pk	Size		Bundle dia.	
	mm	inch	mm	inch
CT-120-7C	120x7.6	4 3/4x0.30	22	0.88
CT-150-7C	150x7.6	6x0.30	39	1.56
CT-200-7C	203x7.6	8x0.30	55	2.20
CT-240-7C	240x7.6	9 5/16x0.30	70	2.80
CT-280-7C	280x7.6	11x0.30	81	3.24
CT-300-7C	300x7.6	11 5/8x0.30	88	3.52
CT-340-7C	340x7.6	13 1/2x0.30	99	3.96
CT-380-7C	380x7.6	15x0.30	110	4.40
CT-380-6C	380x6.4	15x0.20	108	4.32



• Width 6.4mm / 0.26 inch, tensile strength 45kg / 100lbs.


EXTRA HEAVY DUTY CABLE TIES



Width 8.0-9.0mm/0.32-0.36inch, tensile strength 80kg/175lbs

Unit:mm

Part No. 100 pcs pk	Size		Bundle dia.	
	mm	inch	mm	inch
CT-380-8C	380x8.0	15x0.32	110	4.40
CT-450-8C	450x8.0	17 3/4x0.32	133	5.32
CT-500-8C	500x8.0	19 11/16x0.32	143	5.72
CT-550-8C	550x8.0	21 11/16x0.32	166	6.64
CT-610-9C	610x9.0	24x0.32	185	7.28
CT-685-9C	685x9.0	27x0.32	210	8.27
CT-710-9C	710x9.0	28x0.32	220	8.66
CT-762-9C	762x9.0	30x0.35	236	9.44
CT-812-9C	812x9.0	32x0.35	246	9.80
CT-914-9C	914x9.0	36x0.35	270	10.63
CT-940-9C	950x9.0	37x0.36	284	11.36
CT-1168-9C	1168x9.0	46x0.35	360	14.60
CT-1219-9C	1219x9.0	48x0.35	380	14.96
CT-1500-9C	1500x9.0	59x0.36	462	18.48




ULTRA HEAVY DUTY CABLE TIES



Width 12.7mm/0.51inch, tensile strength 114kg/250lbs

Unit:mm

Part No. 100 pcs pk	Size		Bundle dia.	
	mm	inch	mm	inch
CT-230-13C	230x12.7	9x0.51	63	2.52
CT-280-13C	280x12.7	11x0.51	80	3.20
CT-380-13C	380x12.7	15x0.51	110	4.40
CT-480-13C	480x12.7	18 7/6x0.51	140	5.60
CT-550-13C	550x12.7	21 11/16x0.51	166	6.64
CT-580-13C	580x12.7	22 7/6x0.51	175	7.00
CT-730-13C	730x12.7	28 3/4x0.51	225	9.00
CT-880-13C	880x12.7	34 11/16x0.51	267	10.68
CT-1030-13C	1030x12.7	40 1/2x0.51	317	12.68



HEAVY DUTY CABLE TIES

Width 18mm / 0.71inch, tensile strength 55kg/120lbs

Unit:mm

Part No.		Part No.		Bundle dia.	
Lbs	mm	inch	mm	inch	
CT-255-18C	255x17.8	10x0.71	42	1.7	

COLOUR CABLE TIES

We are able to meet any requirement for colouring cable ties.

Hayata proudly boast a comprehensive range of all the popular colours in the most commonly used sizes supplied ex-stock.

We can also produce colour cable ties to your exact requirements in any one of our many and various styles. Minimum quantities are required for special runs, so please be sure to contact our office before ordering.

Colours are as follows:

Grey, Orange, Blue, Green, Red, Yellow, Purple, Fluro Yellow, White and Brown

UV weather resistant or black cable ties are readily available with no minimum order quantity.

※ Except for standard nylon and weather resistant ties, we also have heat-stabilized and 94v-o flame-retardant ties.

MOUNTING HEAD TIES




Unit: mm


Part No.	L	W	A	Max. Bundle Dia	Min. Loop Tensile Strength		packing
					Lbs	kgs	
MT-100-2C	100	2.5	3.0	25	18	8	100pcs
MT-155-3C	171	3.7	4.8	40	40	18	
MT-170-3C	171	3.7	4.0	40	40	18	
MT-205-4C	205	4.2	4.6	60	50	22	
MT-300-4C	300	4.8	4.8	85	50	22	
MT-300-7C	300	7.8	6.0	80	120	55	
MT-370-4C	370	4.8	4.87	102	50	22	
MT-400-7C	398	7.9	6.12	112	120	55	



- The cable tie can be secured to panel with a single bolt.



MT-100-2C, MT-155-3C, MT-170-3C, MT-205-4C, MT-300-4C, MT-370-4C




MT-300-7C, MT-400-7C

RELEASABLE CABLE TIES



Unit: mm

Part No.	L	W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
				Lbs	kgs	
RT-100-2C	100	3.6	25	40	18	100pcs
RT-150-4C	150	4.7	39	50	22	
RT-200-4C	200	4.7	55	50	22	
RT-250-4C	250	4.8	74	50	22	
RT-300-4C	300	4.8	88	50	22	
RT-370-4C	370	4.8	102	50	22	
RT-230-12C	232.5	12.8	60	250	114	
RT-290-12C	292.5	12.8	79	250	114	
RT-405-12C	407.5	12.8	116	250	114	
RT-480-12C	482.5	12.8	140	250	114	
RT-580-12C	576.6	12.8	172	250	114	




- Finger catch design to release cable tie locking where replacement is required. Good for temporary fastening purpose.

RELEASABLE CABLE TIES




Unit: mm

Part No.	packing		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
RV-125B-7C	125	4 15/16	7.6	30	50	22	100pcs
RV-150B-7C	50	6	7.6	35	50	22w	
RV-200B-7C	200	8	7.6	50	50	22	
RV-250B-7C	250	10	7.6	65	50	22	
RV-300B-7C	300	11 7/8	7.6	80	50	22	

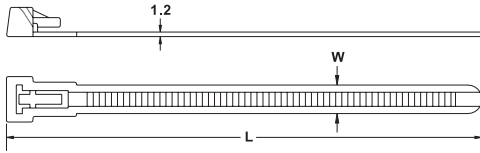

- These ties, which are easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch.

Part No.	packing		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
RVC-125B-7C	125	4 15/16	7.6	30	50	22	100pcs
RVC-150B-7C	50	6	7.6	41	50	22	
RVC-200B-7C	200	8	7.6	58	50	22	
RVC-250B-7C	250	10	7.6	73	50	22	
RVC-300B-7C	300	11 7/8	7.6	89	50	22	




MARKER TIES

Unit: mm

Part No.	L	W	Max. Bundle Dia.	Min. Loop Tensile Strength		Marking pad mm	packing
				Lbs	kgs		
MV-100-2C	100	2.5	25	18	8	25x8	100pcs
MV-100L-2C	130	2.5	25	18	8	28x20	
MV-110-2C	110	2.5	25	18	8	25x8	
MV-200-4C	200	4.6	50	50	22	28x13	
MV-200-2C	200	2.5	50	18	8	30x15	
MV-270-4C	270	4.6	75	50	22	28x13	



- Tie and identify bundles of cable in one operation. Flat areas may be imprinted or written on with a Marking Pen.



MV-100-2C, MV-200-2C



MV-100L-2C



MV-200-4C, MV-270-4C





MV-110-2C

MARKER TIE

Unit: mm

Part No.	L	W	Marking pad	packing
PMT-150	160	5.0	30x9.2	100pcs

- Material: PE

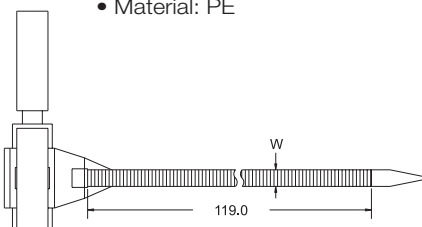


PUSH MOUNT TIE



Unit: mm


Part No.	L		W mm	Max. Bundle Dia. (mm)	Min. LoopTensile Strength		Mounting hole	Chassis	packing
	mm	inch			Lbs	kgs			
	PCVS-130	130			5 1/8	4.8			
PCV-155	155	6 1/8	3.5	40	40	18	4.8	3.0	
PCVS-200	203	8	4.8	50	50	22	4.8	3.0	
PCV-200	203	8	4.8	50	50	22	6.4	3.0	
PFVS-130	130	5 1/8	3.5	30	40	18	4.8	2.4	
PFVS-155	157.5	6 1/8	4.0	38	40	18	4.8	2.4	
PFVS-200	200	8	3.5	50	40	18	4.8	2.4	
PGV-100V0	101	4 1/8	3.5	25	40	18	4.8	2.5	
PGV-130V0	135	5 3/10	3.5	33	40	18	4.8	2.5	
PSV-130	130	5 1/8	4.8	30	50	22	6.4	3.3	
PSV-200	200	8	4.8	50	50	22	6.4	3.3	
PWVS-100	112	4 3/8	2.5	25	18	8	4.6	2.6	
PWVS-130	132.8	5 1/8	4.8	30	50	22	4.6	4.5	
PWVS-155	155	6 1/8	3.5	36	40	18	4.6	3.0	
PWV-130	130	5 1/8	4.8	30	50	22	6.0	2.8	
PWV-200	200	8	4.8	50	50	22	6.0	2.8	
PRVS-130HSBK	134.5	5 1/4	4.8	30	50	22	4.8	5.3	

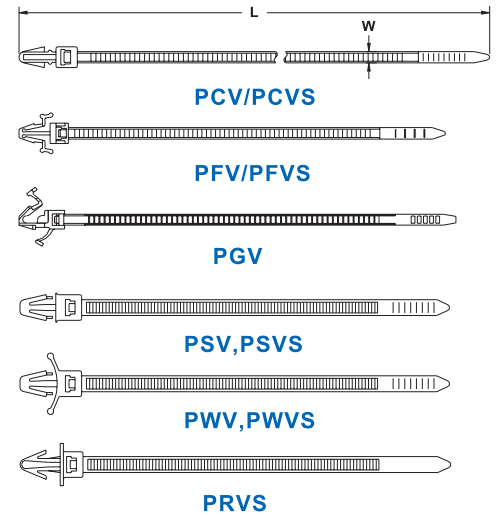

- Material: UL approved NYLON 66, **94V-2**
 ※ PGV-100, PGV-130: UL approved NYLON 66, **94V-0**
 ※ PRVS-130HSBK: UL approved heat stabilized NYLON 66, 94V-2
- Press the tie into a pre-drilled hole simple and secure one-piece harness tying and mounting.

Part No.	L		W mm	Max.Bundle Dia. (mm)	Min. LoopTensile Strength		packing
	mm	inch			Lbs	kgs	
	PHV-150	150			6	8	

- Material: UL approved NYLON 66, 94V-2



Mounting hole 5.4mm




WIRE COLLECT TIE


Unit: mm

Part No.	L		W	Max.Bundle Dia.	Min. LoopTensile Strength		packing
	mm	inch			Lbs	kgs	
	PV-130-15C	130			5 1/8"	15	
PV-140-9C	140	5 1/2"	9	38	18	8	
PV-160-9C	160	6 1/4"	9	45	18	8	
PV-230-5C	234	9 1/16"	5.5	50	=	=	


- Wrap electrical cords for shipping and packaging.
- Inexpensive.
- Material: Polyethylene PE.



PV-130-15C



PV-160-9C




PV-140-9C




PV-230-5C

DOUBLE LOCKING CABLE TIES

Unit: mm



DL-132, DL-180



DL-235, DL-265, DL-300, DL360, DL510, DL610, DL760



Part No.				L		W	Max. Bundle Dia.	Min. LoopTensile Strength		packing
NYLON66		NYLON12		mm	inch			NYLON 66	NYLON 12	
Natural	Black	Natural	Black							
DL-132	DL-132BK	DL-132N12	DL-132N12BK	132	5 1/8"	9.0	30	35	25	100pcs
DL-180	DL-180BK	DL-180N12	DL-180N12BK	180	7"	9.0	45	35	25	
DL-235	DL-235BK	DL-235N12	DL-235N12BK	235	9 1/4"	9.0	55	55	51	
DL-265	DL-265BK	DL-265N12	DL-265N12BK	265	10 1/2"	9.0	78	55	51	
DL-300	DL-300BK	DL-300N12	DL-300N12BK	300	11 7/8"	9.0	88	55	51	
DL-360	DL-360BK	DL-360N12	DL-360N12BK	360	14 1/4"	9.0	100	55	51	
DL-510	DL-510BK	DL-510N12	DL-510N12BK	510	20"	9.0	150	55	51	
DL-610	DL-610BK	DL-610N12	DL-610N12BK	610	24"	9.0	180	55	51	
DL-760	DL-760BK	DL-760N12	DL-760N12BK	760	30"	9.0	230	55	51	


• Material: UL approved NYLON 66, NYLON12, 94V-2

KNOT TIE

Unit: mm

Part No.		L		W	Max. Bundle Dia	Min. LoopTensile Strength		packing
Red	Natural	mm	inch			Lbs	kgs	
STV-130RD	STV-130	130	5 1/8"	=	35	40	18	100pcs

- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.
- Material: UL approved NYLON 66, 94V-2

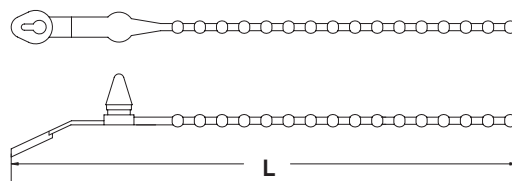


WIRE COLLECT TIE

Unit: mm

Part No.		L	W	Max. Bundle Dia	Min. LoopTensile Strength		packing
Natural	Black				mm	Lbs	
WCT-165	WCT-165BK	165	7	44	50	22	100pcs


• Material: UL approved NYLON 66, 94V-2

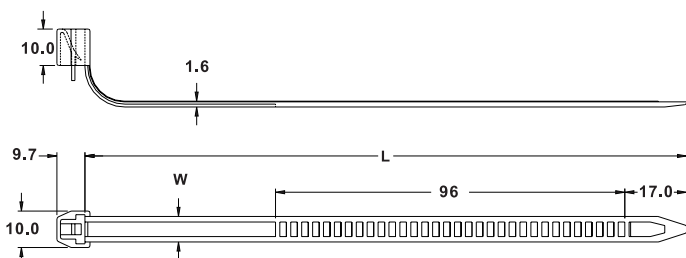

CABLE TRAY FIXING TIE

Unit: mm

Part No.		L		L1	L2	W	Min. LoopTensile Strength		packing
Black	Natural	mm	in	mm	mm		Lbs	kgs	
CTF-320BK	CTF-320	320	12.5	39	279	7.6	120	55	100pcs

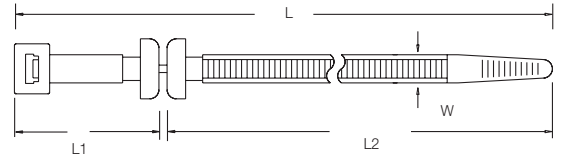


- Material:UL approved NYLON 66, 94V-2
- This simple, neat tie provide a permanent answer to the problem of fixing cables to cable trays. The one-piece all plastic moulding in tough, flexible Nylon 66, snaps apart to slot into cable trays.
- Color: Black

DOUBLE HEAD CABLE TIE



Unit: mm

Part No.	L		W	D1		D2		Min. LoopTensile Strength		packing
	mm	inch		MAX.	MIN.	MAX.	MIN.	lbs	kgs	
DCV-225	225	8 7/8"	4.8	59	2.5	52	5.0	50	22	100pcs
DCV-300	300	11 7/8"	4.8	83	2.5	76	20	50	22	
DCV-370	370	14 9/16"	4.8	105	2.5	98	2.0	50	22	



RELEASIBLE DOUBLE HEAD CABLE TIE

Part No.	L		W	D1		D2		Min. LoopTensile Strength		packing
	mm	inch		MAX.	MIN.	MAX.	MIN.	lbs	kgs	
RDCV-225	225	8 7/8"	4.8	59	2.5	52	2.0	50	22	100pcs
RDCV-300	300	11 7/8"	4.8	83	2.5	76	2.0	50	22	
RDCV-370	370	14 9/16"	4.8	105	2.5	98	2.0	50	22	

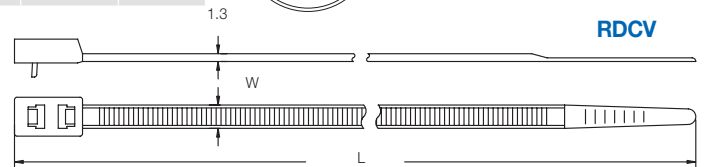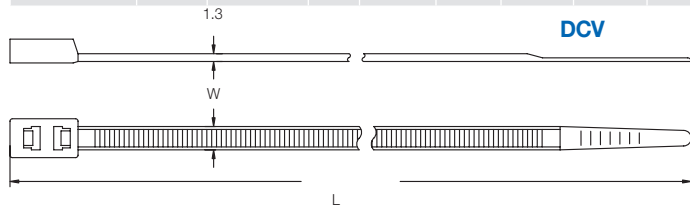


SECURITY TIE

Unit: mm

Part No.	L	W	Max.Bundle Dia.	Marking pad mm	packing
SCT-110	111	2.6	20	8×27.6	100pcs
SCT-250	248.5	3.5	50	36×19	
SCT-400	400	4.8	102	36.5×19	



- Feature: for the purpose of identification for security service logistics, transportation and courier.
The size of Marker plate could be made or carved LOGO upon customer's request.




RELEASIBLE LASHING CABLE TIE

Unit: mm

Part No.	L		W mm	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
	mm	inch			Lbs	kgs	
HRCV-240XL	240	9 4/9"	12.8	60	250	114	100pcs
HRCV-300XL	300	11 4/5"	12.8	79.6	250	114	
HRCV-415XL	415	16 1/3"	12.8	116	250	114	
HRCV-490XL	490	19 2/7"	12.8	140	250	114	
HRCV-590XL	590	23 2/9"	12.8	171	250	114	





- Finger catch design to release cable tie locking where replacement is required. Good for temporary fastening purpose.
- Material: UL approved NYLON 66, 94V-2

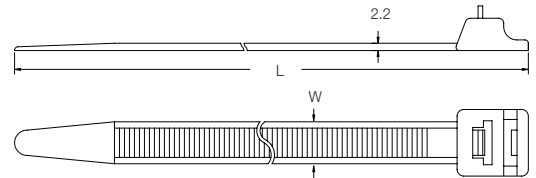

DOUBLE LOCKING CABLE TIE

Unit: mm

Part No.		L		W	Max. Bundle Dia.	Min. Loop Tensile Strength		packing
Black	Natural	mm	inch			Lbs	kgs	
DK-200BK	DK-200	201	8"	9.0	47	80	36	100pcs
DK-290BK	DK-290	392	11 1/2"	9.0	72	120	55	
DK-380BK	DK-380	382	15"	9.0	100	120	55	

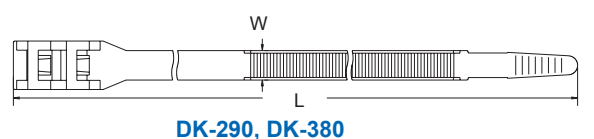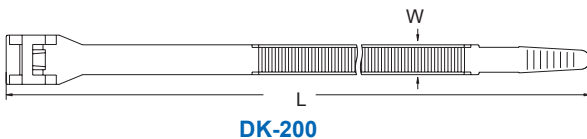




DOUBLE HEAD KNOT TIE

Unit: mm

Part No.				L		W	Max. Bundle Dia.	packing
NYLON 66		PE		mm	inch			
Natural	Black	Natural	Black					
KTV-145	KTV-145BK	KTV-145E	KTV-145EBK	145	5 3/4"	2	35	100pcs
KTV-150	KTV-150BK	KTV-150E	KTV-150EBK	150	6"	4	38	
KTV-170	KTV-170BK	KTV-170E	KTV-170EBK	167.5	6 3/5"	3.5	41	
KTV-180	KTV-180BK	KTV-180E	KTV-180EBK	180	7"	4	46	
KTV-230	KTV-230BK	KTV-230E	KTV-230EBK	230	8 15/16"	4	62	



- Material: NYLON 66 or PE
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.

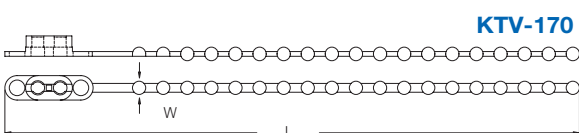


CHASSIS TIE

Unit: mm

Part No.		L		W	Max. Bundle Dia	packing
Black	Natural	mm	inch			
KFC-300BK	KFC-300	304	11 7/8"	3.2	85	100pcs

- Material: UL approved NYLON 66, 94V-2




NYLON CABLE TIE WITH STOPPER

Unit: mm

Part No.	L		W	Max. Bundle Dia	Min. Loop Tensile Strength		packing
	mm	in			Lbs	kgs	
CVS-140	140	5 1/2"	3.2	20	40	18	100pcs
CVS-190	190	7 1/2"	4.8	45	50	22	

- Material: UL approved NYLON 66, 94V-2

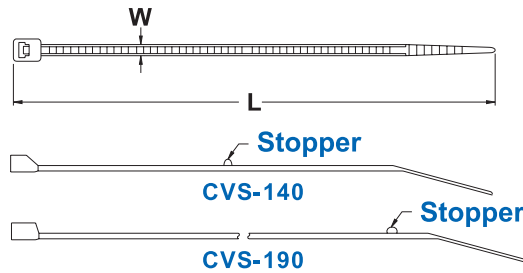


COATED COPPER TUBE CABLE TIE

Unit: mm

Part No.	L		W	T	packing
	mm	inch			
AT-250	235	9 1/4"	20	2.8	100pcs
AT-290	275	10 13/16"	20	2.8	

- Material: PE (Natural)
- Function: Special for coated copper pipe in air conditioner

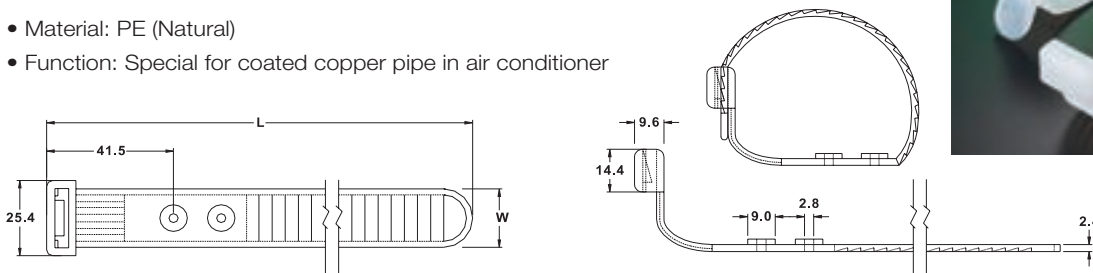


MAGIC CABLE TIE

Unit: mm

Part No.	L (mm)	W	Max. Bundle Dia	packing
MGT-125	125	12	30	20pcs
MGT-135	135	12	33	
MGT-180	180	12	40	
MGT-210	210	16	50	
MGT-310	310	16	85	

- Material: Hook Side: PP, Loop Side: NYLON
- COLOR: Black (BK), Red (RD), Yellow (YW), Blue (BE), Green (GN)
- APPLICATION: Cord and cable management (UTP/STP/FIBER), wire harnesses, prevent interruption to transfer speed when using traditional NYLON cable ties. Reusable and easy to install.




IN-LINE CABLE TIES

Unit: mm

Part No.	L	W	Max. Bundle Dia	packing
FCT-255	255	9.0	74	100pcs
FCT-391	391	9.0	117	

- Flat headed low profile design to be used with playground equipment to avoid harming playing children.




FCT-255, FCT-391



Part No.	L	W	packing
RRCV-100	103	2.5	100PCS

- Flat headed low profile design to be used with playground equipment to avoid harming palyng children.

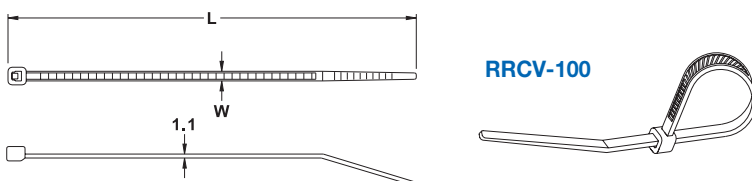

RRCV-100




SADDLE MOUNTING TIE

Unit: mm

Part No.	L	W	packing
PMA-150	144.6	7	100PCS

- Material: UL approved NYLON 66, 94V-2




BAED TYPE TIES


Unit: mm

Part No.	L		W	Max. Bundle Dia	packing
	mm	inch			
BT-100	103	4"	2.2	25	100pcs
BT-120	120	4 3/4"	2.4	30	
BT-150	150	6"	2.9	39	
BT-180	180	7"	2.9	49	
BT-230	226	8 15/16"	3.8	63	
BT-280	273	11"	3	75	


- Material: UL approved NYLON 66, 94V-2
- Easy to install and release.
- Beaded design keeps wires from shifting or slipping.



BT-100,120



BT-150,180,280



BT-230



DISPLAY PACKS-CANISTER PACK

Unit: mm

Part No.	Contents		
CTP-300	100pcs of	CT-100-2	Natural
	25 pcs of ea	CT-100-2	Red, Yellow, Blue Green
	50 pcs of	CT-200-3	Natural
	25 pcs of ea	CT-200-3	Red & Blue
		TOTAL	300 PIECES
CTP-400	100 pcs of	CT-200-3	Natural
	100 pcs of ea	CT-100-2	Red, Blue & Green
		TOTAL	400 PIECES
CTP-650	100 pcs of	CT-100-2	Natural
	50 pcs of ea	CT-100-2	Red, Blue, Yellow & Green
	300 pcs of	CT-200-4	Natural
	50 pcs of	CT-280-4	Natural
		TOTAL	650PIECES
CTP-650S	100 pcs of ea	CT-100-2	Red, Blue, Yellow & Green
	100 pcs of	CT-100-2	Natural
	150 pcs of	CT-180-4	Natural
		TOTAL	650 PIECES
CTP-850	100 pcs of	CT-100-2	Natural
	100 pcs of ea	CT-100-2	Red, Blue, Yellow & Green
	300 pcs of ea	CT-200-4	Natural
	50 pcs of	CT-280-4	Natural
		TOTAL	850 PIECES
CTP-1000	200 pcs of	CT-100-2	Natural
	100 pcs of ea	CT-100-2	Red, Blue, Yellow & Green
	350 pcs of	CT-200-4	Natural
	50 pcs of	CT-280-4	Natural
		TOTAL	1,000 PIECES



Part No.	Contents		
CTP-1001	361 pcs of	CT-100-2	Natural
	50 pcs of ea	CT-100-2	Red, Yellow & Blue
	425 pcs of	CT-200-4	Natural
	65 pcs of	CT-280-4	Natural
		TOTAL	1,001 PIECES
CTP-1200	200 pcs of ea	CT-100-2	Natural & Black
	100 pcs of ea	CT-100-2	Red, Yellow & Green
	400 pcs of	CT-200-4	Natural
	100 pcs of	CT-280-4	Natural
	TOTAL	1,200 PIECES	
BP-500SQ	100 pcs of	CT-100-2	Natural
	25 pcs of ea	CT-100-2	Red, Blue, Yellow & Black
	100 pcs of	CT-140-3	Natural
	100 pcs of	CT-140B-4	Black
	50 pcs of	CT-180-4	Natural
	50 pcs of	CT-180B-4	Black
	TOTAL	500 PIECES	

RETAIL PACK-BLISTER PACKS

Unit: mm

Part No.	Contents	
PB-75 N	25 pcs of ea	CT-094-2, CT-120-4 & CT-190-4 Natural
PB-75 Black	25 pcs of ea	CT-094-2, CT-120-4, CT-190-4 Black
PB-75 Colour	25 pcs of ea	CT-094-2 Natural, CT-120-4C Red CT-190-4C Yellow
*Please check on ordering the available colours to choose from		
PB-75-3C	25 pcs of ea	CT-100-2C, CT-140-3, CT-200-3L
Supplied In one pack with each size In Its own compartment		
PB-75-L	25 pcs of ea	CT-100-2C, CT-140-3, CT-200-4C
Supplied Loose		

PB-100	30 pcs of	CT-075-2	Cable tie
	20 pcs of	CT-100-2	Cable tie
	10 pcs of	KW-1	Wire tap
	9 pcs of	CE-2	Closed end connector
	9 pcs of	CE-5	Closed end connector
	6 pcs of	CC-05	Cable clip
	8 pcs of	CC-06	Cable clip
	8 pcs of	CC-10	Cable clip
PB-350	100 pcs of	CT-100-2	Natural
	25 pcs of	CT-100-2	Black, Red, Blue & Yellow
	50 pcs of	CT-200-3C	Natural, Black, Red, Yellow & Blue
	50 pcs of	CT-280-4	Red, Black, Yellow & Blue
		TOTAL	350 PIECES



HANG PACKS-CABLE TIES

Unit: mm

Part No.	Contents		
CTHP-100-2	50 pcs of	CT-100-2	Natural
CTHP-100BK-2	50 pcs of	CT-100-2	Black
CTHP-200-3	50 pcs of	CT-200-3	Natural
CTHP-200BK-3	50 pcs of	CT-200-3	Black
CTHP-280-4	50 pcs of	CT-280-4	Natural
CTHP-280BK-4	50 pcs of	CT-280-4	Black
CTHP-100/200-M	25 pcs of mixed	CT-100-2	Black (16), Red (7), Yellow (6) & Blue (6)
	25 pcs of mixed	CT-200-3	Black (6), Red (7), Yellow (6) & Blue (6)
		TOTAL	50 PIECES
CTHP-100/200-Y	25 pcs of	CT-100-2	Yellow
	25 pcs of	CT-200-3	Yellow
		TOTAL	50 PIECES
CTHP-100/200-BL	25 pcs of	CT-100-2	Blue
	25 pcs of	CT-200-3	Blue
		TOTAL	50 PIECES
CTHP-100/200-R	25 pcs of	CT-100-2	Red
	25 pcs of	CT-200-3	Red
		TOTAL	50 PIECES
CTHP-100/200-BK	25 pcs of	CT-100-2	Black
	25 pcs of	CT-200-3	Black
		TOTAL	50 PIECES
CTHP-100/200-CL	25 pcs of	CT-100-2	Natural
	25 pcs of	CT-200-3	Natural
		TOTAL	50 PIECES
CTHP-100/200-GR	25 pcs of	CT-100-2	Green
	25 pcs of	CT-200-3	Green
		TOTAL	50 PIECES
CTHP-200/280-M	25 pcs of mixed	CT-200-3	Black (6), Red (7), Yellow (6) & Blue (6)
	25 pcs of mixed	CT-280-4	Black (6), Red (7), Yellow (6) & Blue(6)
		TOTAL	50 PIECES
CTHP-200/280-Y	25 pcs of	CT-200-3	Yellow
	25 pcs of	CT-280-4	Yellow
		TOTAL	50 PIECES
CTHP-200/280-BL	25 pcs of	CT-200-3	Blue
	25 pcs of	CT-280-4	Blue
		TOTAL	50 PIECES
CTHP-200/280-R	25 pcs of	CT-200-3	Red
	25 pcs of	CT-280-4	Red
		TOTAL	50 PIECES
CTHP-200/280-BK	25 pcs of	CT-200-3	Black
	25 pcs of	CT-280-4	Black
		TOTAL	50 PIECES




Part No.	Contents		
CTHP-200/280-CL	25 pcs of	CT-200-3	Natural
	25 pcs of	CT-280-4	Natural
		TOTAL	50 PIECES
CTHP-200/280-GR	25pcs of	CT-200-3	Green
	25 pcs of	CT-280-4	Green
		TOTAL	50 PIECES
CTHP-100/200/280-M150	5 pcs of ea	CT-100-2	Black, Red, Yellow & Blue
	5 pcs of ea	CT-200-3	Black, Red, Yellow & Blue
	10 pcs of mixed	CT-280-4	Black (3), Red (2), Yellow (2) & Blue (3)
		TOTAL	50 PIECES
CTHP-100/200/280-M150	10 pcs of ea	CT-100-2	Natural, Black, Red, Yellow & Blue
	10 pcs of ea	CT-200-3	Natural, Black, Red, Yellow & Blue
	10 pcs of ea	CT-280-4	Natural, Black, Red, Yellow & Blue
		TOTAL	150 PIECES

ROLLER BALL STAINLESS TIES

Unit: mm

Part No.	Size	Tensile	Max. Bundle
	mm	Strength (1bs)	mm
RST-130-4C	127×4.6	100	25
RST-150-4C	152×4.6	100	32
RST-200-4C	201×4.6	100	50
RST-270-4C	266×4.6	100	69
RST-300-4C	300×4.6	100	76
RST-360-4C	362×4.6	100	102
RST-520-4C	521×4.6	100	152
RST-680-4C	679×4.6	100	203
RST-130-7C	127×7.9	250	25
RST-150-7C	152×7.9	250	32
RST-200-7C	201×7.9	250	50
RST-270-7C	266×7.9	250	69
RST-300-7C	300×7.9	250	76
RST-360-7C	362×7.9	250	102
RST-520-7C	521×7.9	250	152
RST-680-7C	679×7.9	250	203

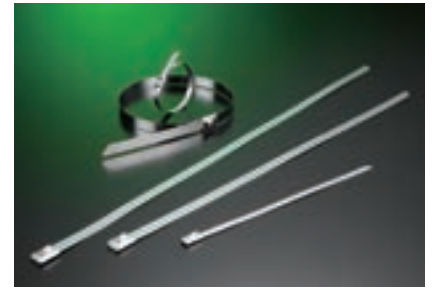

- Available In either 304 or 316 grade stainless steel.
- To order just add the grade of stainless steel after the part No.
- For example **RST-130-4C 316**

TIE GUN

Unit: mm

Part No.	For Tie Width	Weight
TG-3	2.5~5.0	300g
TG-6	2.5~5.0	60g
TG-7	2.5~5.0	275g
TG-9	2.5~10.0	275g
TG-10	4.8~13.0	320g

- Economical, pocket type
- Twist to cut surplus tie end after tightening cable (TG-6)



BANDEX Cable Accessories


INSULATING



SPIRAL BINDINGS

Unit: mm


Part No.	D	D1	W	Wrapping range (mmØ)	Packing
SW3	1.5	3.0	4.0	15~18	10M/roll
SW6	3.2	4.5	7.0	10~15	
SW6L	4.1	6.2	7.0	10~15	
SW6.5	5.0	6.2	7.5	10~15	
SW8	6.0	8.0	10.8	15~60	
SW10	7.5	10.0	11.4	20~60	
SW12	9.0	12.0	13.9	20~65	
SW15	12.0	15.0	15.0	20~70	
SW19	15.0	19.0	18.2	25~100	
SW24	20.0	24.0	19.6	20~130	
SW30YW	26.0	30.0	43.0	26~160	2M/pc

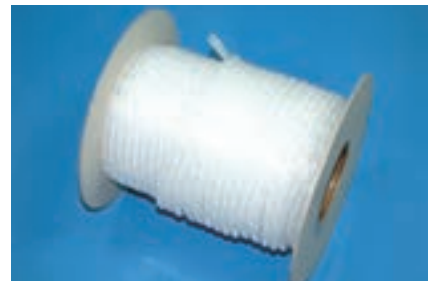

Part No.	D	D1	W	Wrapping range (mmØ)	Packing
SW-6N6	3.3	4.5	7.0	4~25	10M/roll
SW-6LN6	4.8	6.0	7.0	4~25	
SW-8N6	6.4	8.0	10.8	6~30	
SW-10N6	8.4	10.0	11.4	7.5~30	
SW-12N6	10.4	12.0	13.9	9~32	
SW-15N6	13.4	15.0	15.0	12~35	
SW-19N6	17.0	19.0	18.2	15~50	
SW-24N6	22.0	24.0	19.6	20~100	

- Material: Made from PE material or NYLON6. Excellent in insulation and binding strength.
- Color: Standard in natural. Black and Colors available upon request.
- Description:
 1. Flexible construction enable bands to follow wire ways easily.
 2. Durable, reusable with retained spiral strength.
 3. Fix ends of band with **BANDEX** cable ties and spiral wire bundles in clockwise direction to complete works.
 4. Expand spiral range almost without limit.

A economical way of cable binding. Easily applied to electric harness cables and wire bundles. Cut-to-fit versatility in convenient roll-form.

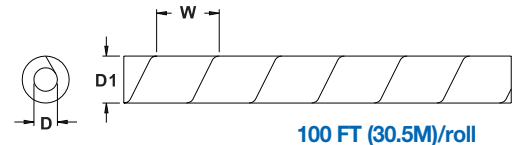


BINDING BAND

Unit: mm

Part No.	W	L	Packing
A-6	6	10M	10M/bag
A-8	8	10M	
A-10	10	10M	
A-12	12	10M	
A-6B	Buttons For Band		100pcs/bag
A-8B			
A-10B			
A-12B			



- Constructed of natural PVC which is outstanding in resisting effects of water, grease, chemicals.
- Used for fastening or supporting cable, pipe, wire bundles, wire harness.
- Low cost for permanent application.
Button up band is all.




WRAPPING BAND

Button Type

Unit: mm

Part NO.		Button Distance(mm)	Max. Bundle Dia. (mm)	Packing
Grey	Black/Grey			
WB-40	WBS-40	40	12	60Yards/RL (55Meters)
WB-47	WBS-47	47	15	
WB-60	WBS-60	60	20	
WB-80	WBS-80	80	25	
WB-100	WBS-100	100	30	
WB-128	WBS-128	128	40	
WB-140	WBS-140	140	44	
WB-150	WBS-150	150	47	
WB-160	WBS-160	160	50	
WB-182	WBS-182	182	57	
WB-222	WBS-222	222	70	
WB-315	WBS-315	315	100	
WB-475	WBS-475	475	150	

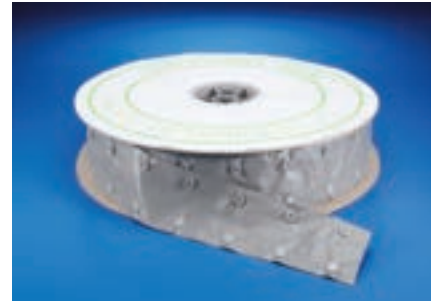

Tape Type

Part NO.	Band width (mm)	Max. Bundle Dia (mm)	Packing
WBT-84	84	20	60Yards/RL (55Meters)
WBT-100	100	25	
WBT-115	115	30	
WBT-147	147	40	
WBT-183	183	50	
WBT-246	246	70	
WBT-340	340	100	

cut-to fit versality in convenient roll-fom

- Material: PVC Flamability rating 94V-0
- Application:
 1. Good for cable wrapping
 2. Easy to wrap. Re-usable

BINDING BAND

Unit: mm

Part NO.	Size	Packing
B-1	1.0mm	1 Bundle

- Diameter: 1m/m (solid)
- Color: Natural white
- Packing: per bundle
- Material: PVC



VINYL TIE

Part NO: M-1

Color: Black (Red \ White \ Blue \ Yellow or Green color is available)



PET TIE

Part NO: PET-1

Color: Black \ White
※ No Metal inside




SNAP BAND

Unit: mm

Part NO.	Size	Packing
SNB-03	As Figure	100pcs/bag


- Material: UL approved NYLON 66, 94V-2

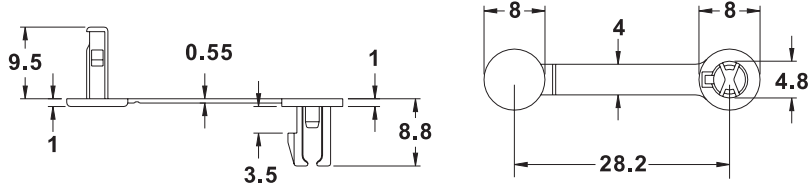

CABLE CLAMPS

Unit: mm

Part No.	Bolt Hole		Size				Packing
	A	B	C	D	E	F	
CC03	4.8	8.0	9.6	3.0 (1/8")	17.0	1.2	100pcs
CC05	4.8	9.2	9.6	5.0 (3/16")	18.6	1.2	
CC06	4.6	10.0	10.0	6.35 (1/4")	20.0	1.4	
CC08	4.6	12.0	10.0	7.9 (5/16")	22.0	1.5	
CC10	4.0	12.5	12.0	9.5 (3/8")	24.0	1.5	
CC13	5.0	15.2	12.0	12.7 (1/2")	31.0	1.5	
CC16	4.6	18.2	12.0	15.8 (5/8")	34.3	1.5	
CC19	4.6	18.2	11.8	19.4 (3/4")	35.0	1.5	
CC25	4.6	22.0	12.0	25.4 (1")	43.0	1.8	
CC28	4.6	24.0	12.0	27.5 (1 1/16")	50.0	1.8	
CC32	4.6	26.2	12.0	31.8 (1 1/4")	46.2	1.8	
CC38	4.6	30.0	12.0	36.7 (1 1/2")	50.0	1.8	

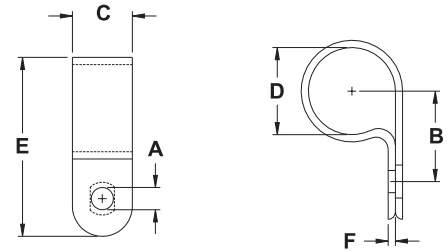

- Material: UL approved NYLON 66, 94V-2
- CABLE CLAMPS are designed to hold cables, tubes, and components in domestic appliance, electronics and electric apparatus generally.
- Interior edges are radiused to protect cable insulation.
- To apply, just clamp down on loosen cables and screw it to chassis.
- Black color available.

CABLE CLAMPS


ADJUSTABLE CABLE CLAMP

Unit: mm

Part No.	A	B	C	D	Max. Bundle Dia	Packing
PC-0406	5	13	23.5	10.4	4.8~6.4	100pcs
PC-0609	5	13	30.5	16.1	6.7~9.5	
PC-0914	5	13	40.0	20.7	9.5~14.3	



- Material: UL approved NYLON 66, 94V-2
- Feature: Oval hole design for adjustable of bundling size.

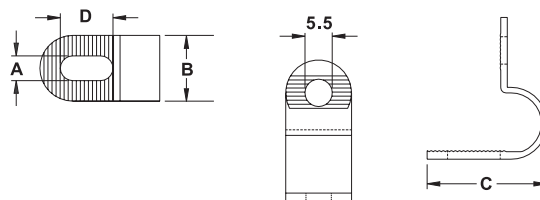


CABLE CLAMP

Unit: mm

Part No.	A	B	C	D	E	F	Packing
KUC-5	4.4	11.6	8.5	5	20	1.3	100pcs





- Material: UL approved NYLON 66, 94V-2




SELF ADHESIVE TIE MOUNT

Unit: mm


Part No.	L	W	H	Mounting Hole	T	packing
TM-1212-4S4	12.5	12.5	3.2	-	3.2	100pcs
TM-1919-4S2	19.0	19.0	3.9	3.2	4.6	
TM-1919-4	19.0	19.0	3.9	3.2	4.6	
TM-2121-4	21.8	21.8	4.0	-	4.8	
TM-2828-4	28.6	28.6	5.3	5.0	5.5	
TM-2828-2	29.2	29.2	5.4	5.0	5.0	
TM-2525-4	26.1	26.1	6.0	4.3	8.0	
TM-1818R	18.9	18.9	4.6	4.8	4.2	
TM-2626R	26.3	26.3	6.0	5.0	5.6	
TM-1818T	19.0	19.0	5.0	4.4	4.1	
TM-2626T	26.5	26.5	7.4	4.3	5.8	
TM-3838	38.5	38.5	7.6	5.0	10.2	

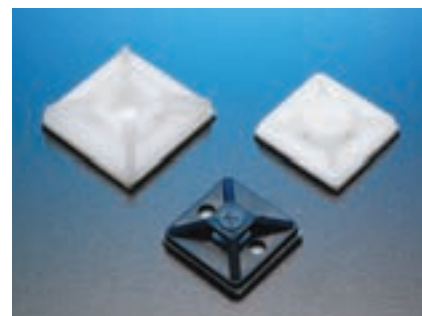


TM-1212-4




TM-1919-4




TM-2121-4




TM-2828-2




TM-2525-4




TM-2828-4




TM-1818R
TM-2626R



TM-1818T



TM-3838




TM-2626T

- Material: UL approved NYLON 66, 94V-2 (Backed with adhesive tape)
- SELF-ADHESIVE TIE MOUNTS is designed to support light weigh wire bundles when properly applied on any clean, smooth, grease free surface. For heavy support. mounting hole is provided for screws.
- To apply, simply peel off backing paper and apply mount to surface after that, cable ties can be inserted to secure wire bundles.
- Black color available.
 - ※ TM-1212-4S4: 4pcs on a strip (Simply peel off backing paper)
 - ※ TM-1919-4S2: 2pcs on a strip(Simply peel off backing paper)


SCREW MOUNT BASES

Unit: mm


Part No.	H	L	W	T	B	packing
TM-0	5	19.6	9.5	5.2	3.7	100pcs/ bag
TM-0L	5	19	9.5	5	5.2	
TM-0R	6.2	19.1	10	5.2	4.2	
TM-1	7	15	10	5.1	3.5	
TM-1S	5.8	12.8	7	4.0	3.3	
TM-2S	9	23	16	9	5	
TM-2	9	23	16	9	6	
TM-2L	9	23	16	9	6.5	
TM-3	17.5	23	13.8	9.5	5.3	
TM-4	11.6	30	14.7	9.3	5.2	
TM-5	9.7	21.3	15.5	7.8	5.8x9.7	




TM-0, TM-0L




TM-0R



TM-1, TM-1S




TM-2, TM-2L




TM-3



TM-4




TM-5




TM-5


- Material: UL approved NYLON 66, 94V-2
- Saddle design provide maximun stability to wire bundles.
- To apply, simply fix mount with a screw and secure wire bundles with BANDEX nylon cable ties.
- To apply with Bandex nylon cables ties: TM-0: CT075-2C, CT094-2C,....., CT280-4C, CT310-4C TM-1: CT075-2C, CT094-2C,.....,CT280-4C, CT310-4C TM-2: All applicable size.




TM-1, 1S, 2, 2S, 2L



TM-3



TM-4



TM-5


WALL PLUG MOUNT

Unit: mm

Part No.	Dimension			Mounting Hole	Packing
	A	B	T		
MPM-5	24.4	6.1	5.8	5	100pcs
MPM-6	24.7	6.3	9.9	6	
MPM-8	37.5	6.3	9.7	9	
MPM-9	36.2	13.0	9.7	9	



- Material: UL approved NYLON 66, 94V-2

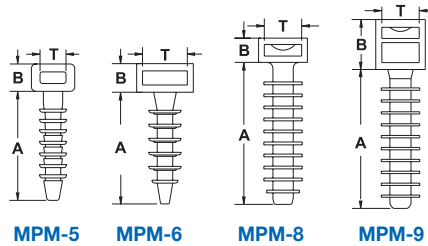


PUSH TIE MOUNT

Unit: mm

Part No.	T	Mounting Hole	Packing
PHC-4	3.8	4.8	100pcs
PHC-5	5	7.6	
PHC-6.5	6.5	8.5	
PHC-8	8.1	6.5	
PHC-9	9.4	7.9	
PHC-1105	11	As Figure	
PHC-1509	7.8	4.5	



- Material: UL approved NYLON 66, 94V-2
- Drill hole on board to fix tie mount and then insert tie into the mount for bundling cables.

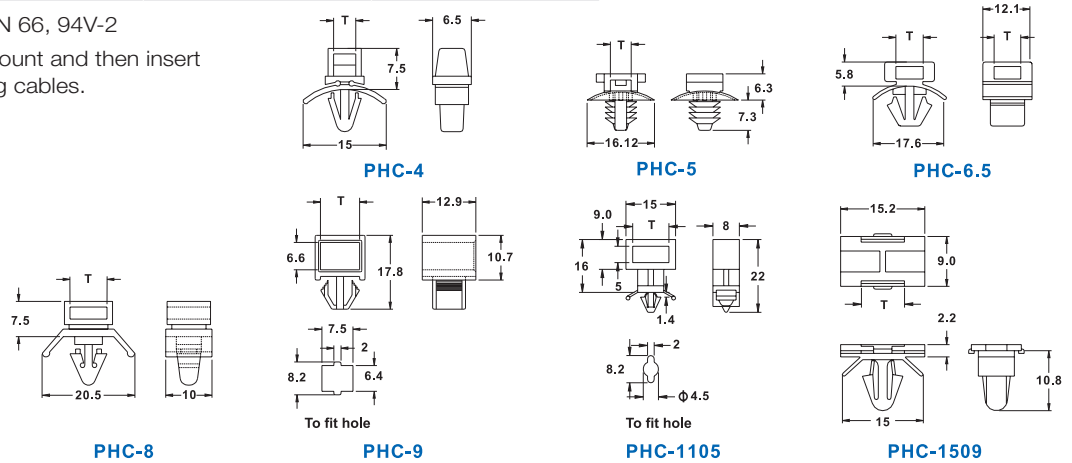


SELF-ADHESIVE CABLE CLAMP

Unit: mm

Part No.	Size						Packing
	AØ	BØ	T1	L	W	H	
4J-S	5.5	5.0	3.0	25.8	13.4	12.2	100pcs
6J-S	7.5	5.0	3.2	28.8	13.4	14.0	
8J-S	12.0	5.3	3.0	34.8	16.5	18.5	
10J-S	14.0	5.0	3.2	36.5	16.4	19.5	
11J-S	15.0	5.0	2.7	38.2	16.0	20.3	
12J-S	17.0	4.8	3.1	41.3	15.6	24.0	




- Material: UL approved BLACK NYLON 66, 94V-2 (Backed with adhesive tape)
- Backed with a high quality tape. Designed to secure wire bundles where fixing holes are impractical. Can be quickly applied to almost any clean, smooth and grease-free surface. (Also provided with a mounting hole)
- Color: Black

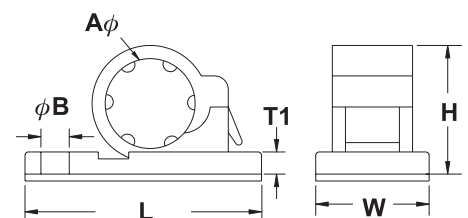

ADJUSTABLE CABLE CLAMPS

Unit: mm

Part No.	AØ mm	B	C	D	E	F	Packing
AP-0810	7.9~10.3	25.4	22.2	19.1	1.6	10.2	100pcs
AP-1013	10.0~12.5	31.8	27.8	19.1	1.6	10.2	
AP-1316	12.6~15.4	37.0	31.8	18.4	3.0	12.1	
AP-1720	16.5~20.1	42.0	37.0	25.0	3.0	12.7	
AP-2225	22.2~25.4	41.8	43.8	21.5	3.0	11.3	

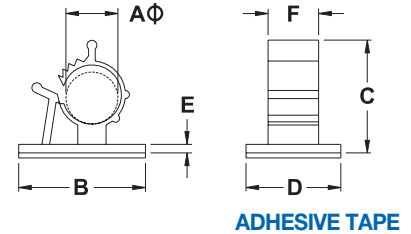


- Material: UL approved Black NYLON 66, 94V-2 (Backed. with adhesive tape)
- One size of adjustable clamp can accommodate various cables that will save your cost stock.
- Easy to install, open for unlimited usage.
- Color: Black

CABLE CLAMP

Unit: mm

Part No.		AØ mm	B mm	C mm	Packing
Adhesive	Push				
TS-0607	PTS-0607	6~7	20.0	25	100pcs
TS-0708	PTS-0708	7~8	20.0	25	
TS-0910	PTS-0910	9~10	24.5	30	
TS-1214	PTS-1214	12~14	24.5	30	
TS-1618	PTS-1618	16~18	24.5	30	

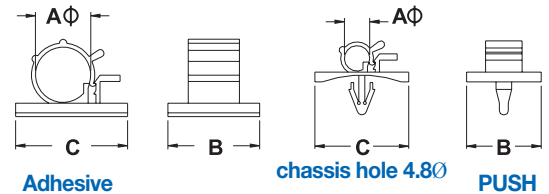


- Material: UL approved grey NYLON 66, 94V-2
- Two stage lock design to accommodate different cable size in one clamp.
- Same clamp available in both "STICKY" and "PUSH MOUNT" design.
- Color: Grey

ADJUSTABLE CABLE CLAMP

Unit: mm

Part No.	A	B	C	L	Max. Bundle Dia. (mm)	Packing
ATC-17	25.0	18.0	7.9	70	17.0	100pcs
ATC-22	30.5	21.0	12.0	90	22.0	
ATC-26	30.5	21.0	12.0	108	26.0	

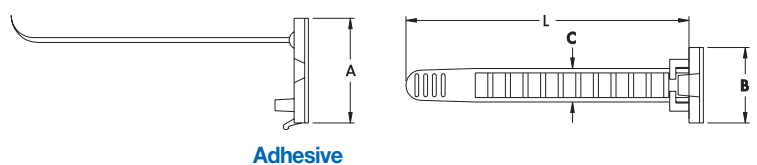



- Material: UL approved Natural NYLON 66, 94V-2

BANDEX Cable Accessories

SELF-ADHESIVE WIRE CLAMPS


Unit: mm

Part No.	L	L1	W	W1	H	H1	Packing
FC-1	13.0	8.0	9.5	6.5	5.2	2.8	100pcs
FC-2	16.0	4.0	15.5	9.0	6.8	4.0	
※FC-0601	19.1	6.4	12.9	=	2.2	0.9	
FC-1001	11.9	9.3	6.0	=	3.5	1.0	
FC-1206	16.0	11.9	15.8	8.9	9.0	5.8	

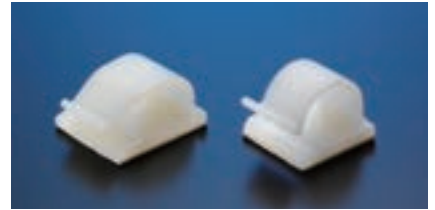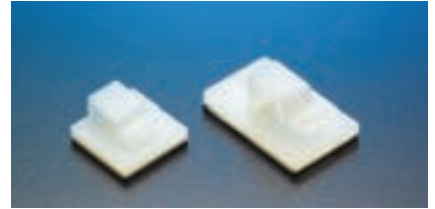


• Material: UL approved Natural NYLON 66, 94V-2

※FC-0601 MATERIAL IS ABS WITH UL APPROVAL, FLAME RATING IS 94HB

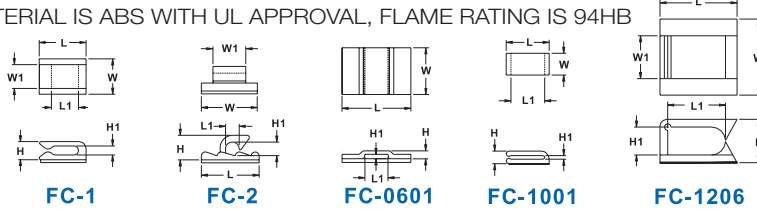


Part No.	L	L1	W	W1	H	H1	Packing
FC-3	16	12.5	16	8.8	8.7	3.7	100pcs
FC-4	27	14.8	17	3.1	8.7	5.5	

• Material: UL approved Natural NYLON 66, 94V-2

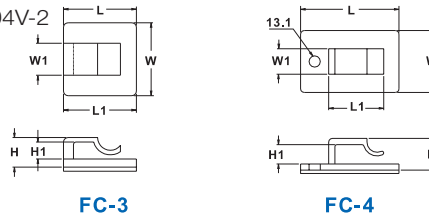

Part No.	L	L1	W	W1	H	H1	Packing
FC-0605	19	5.9	19	10	7.2	4.9	100pcs
FC-1208	26.8	11.9	26.5	12.3	11.7	8.3	
FC-1813	25.6	17.8	25.5	15.8	17.2	13.3	
FC-2211	32.5	22.2	28.3	18.7	15.2	11.1	


• Material: UL approved Natural NYLON 66, 94V-2

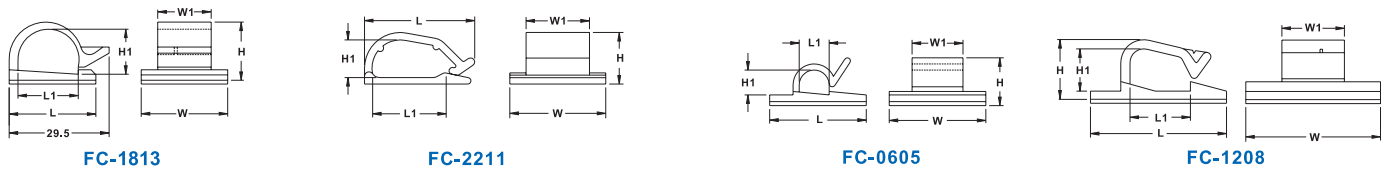

FLAT CABLE CLAMP

Unit: mm

Part No.	Size						For Cable	Packing
	A	B	C	D	E	F		
FC-30	32.0	6.2	45.8	19.8	14.9	2.8	-	100pcs
FC-40	39.5	6.2	53.5	19.2	14.8	2.6	-	
FC-50	63.5	6.0	77.5	19.2	14.9	2.8	50PIN	
FCT-30	31.8	11.3	45.1	18.5	16.0	16.3	30PIN	
FCT-40	54.0	11.3	67.0	15.7	12.0	16.3	40PIN	
FCT-50	65.0	11.3	78.4	18.6	15.8	16.3	50PIN	
FC-635	63.5	6.4	76.2	-	-	-	50PIN	
FC-776	77.6	6.4	92.7	-	-	-	60PIN	
FCP-315	31.4	7.6	44.7	19.1	15.2	12.4	30PIN	
FCW-50	52.2	7.0	56.8	26.2	23.0	13.0	30PIN	

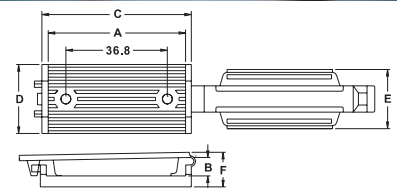


• Material: UL approved NYLON 66, 94V-2


• Clamp down ribbon cable by finger pressure.

• Color: Natural


ADHESIVE TAPE



FC-30,40,50 ADHESIVE TAPE




FCT-30,40,50 ADHESIVE TAPE



FC-635,FC-776

FCW-50



FCP-315


To Fit 8mm hole.

PUSH TIE MOUNT

Unit: mm

Part NO.	A	B	C	D	E	F	Packing
PFS-10	10.1	17.2	28.4	20.7	11.9	14.3	100pcs
PFS-15	14.9	19.3	31.8	27.1	14	16.3	
PFS-18	17.3	21.2	35	29	15.9	18.3	

- Material: UL approved grey NYLON 66, 94V-2





MOUNTING WIRE CLIP

Unit: mm

Part NO.	L	L1	W	W1	H	H1	Packing
MFC-1002	20.2	9.8	10.2	5.2	6.0	2.2	100pcs

- Material: UL approved Natural NYLON 66, 94V-2

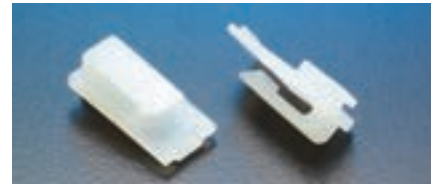


WIRE CLIP

Unit: mm

Part NO.	L	L1	W	W1	H	H1	Packing
FC-0903	12.8	8.9	9.8	6.6	5.0	2.8	100pcs

- Material: UL approved Natural NYLON 66, 94V-2





WIRE CLIP

Unit: mm

Part NO.	L	W	H	H1	Packing
WH-4	18.7	12.8	6.0	4.4	100pcs

- Material: UL approved Natural NYLON 66, 94V-2

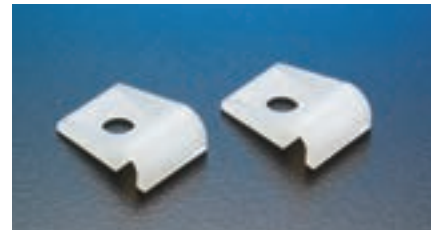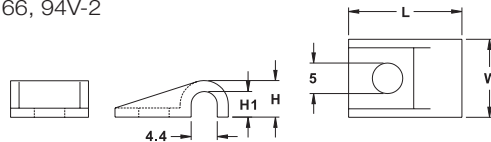


CATV SIDING CLIP

Unit: mm

Part NO.	D	L	W	H	Packing
CATV-1	6.3	21.1	12.8	9.2	100pcs

- Material: UL approved Black NYLON 66, 94V-2 (Backed with adhesive tape)
- Designed for installation of (1/4" diam) RG-59 (u) type cable.
- Color: Black



ADHESIVE TAPE




SELF-ADHESIVE WIRE CLIP

Unit: mm

Part NO.	W	L	H	Packing
VC-2	16.5	21.5	6.2	100pcs

- Material: PE (White)





CABLE CLAMP

Unit: mm

Part NO.	Dimension	Packing
DCC-15	As Figure	100pcs

• Material: UL approved NYLON 66, 94V-2

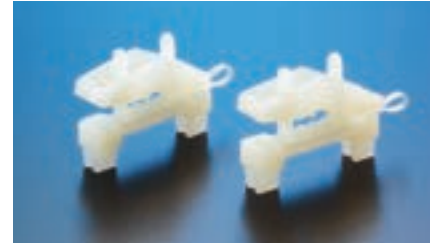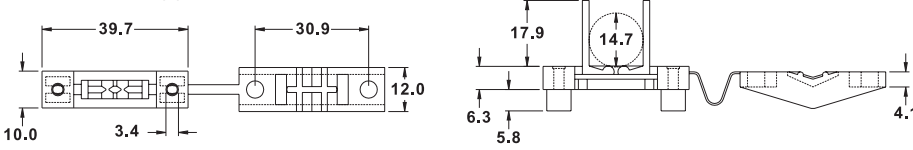


CABLE CLAMPS

CABLE CLAMPS AND CLIPS

Unit: mm

Part No.	A	B	C	Packing
RC-34	4.1	14.3	4.1	100pcs

• Material: UL approved NYLON 66, 94V-2





SELF-ADHESIVE FLAT CABLE CLAMPS

Unit: mm

Part NO.	L	W	H	Packing
RC15	15	24	9	100pcs
RC20	20	24	9	
RC25	25	24	9	
RC28	28	24	9	
SFC-15	15	13	6	
SFC-20	20	13	6	
SFC-25	25	13	6	
SFC-28	28	13	6	

- Made of finest PVC backed with quality adhesive tape.
- Conduct your flat cable neatly and firmly.
- Insert your cable into the clamp and your job is done.
- Color: Grey

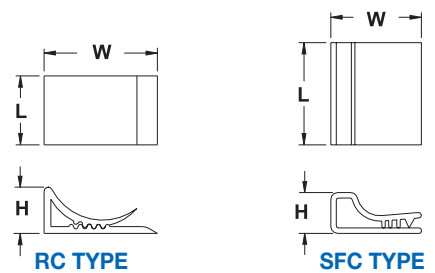
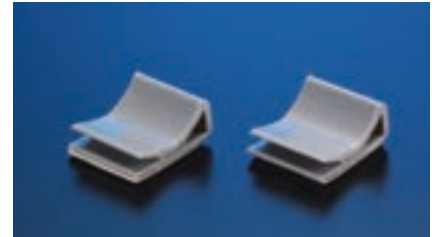


CABLE CLAMP

Unit: mm

Part No.	L	W1	W2	Packing
CL-15	15	18.5	16	100pcs
CL-20	20	18.5	16	
CL-25	25	18.5	16	
CL-28	28	18.5	16	

• Made of finest PVC backed with quality adhesive tape.

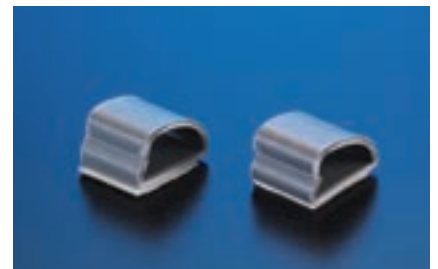


SELF-ADHESIVE WIRE CLIP

Unit: mm

Part No.	Dimension					Packing
	A	B	C	D	E	
MWC-15	19.4	10.0	15.0	5.0	0.5	100pcs
MWC-25	25.0	15.0	25.0	5.0	0.5	

- Material: Metal (with adhesive tape)




CABLE CLAMP

Unit: mm

Part No.		D	D1	L	Packing
PVC	PCV				
CW3-32	CWC3-32	7.5	3.3	32.1	100pcs
CW3-52	CWC3-52	7.5	3.3	52.1	
CW3-60	CWC3-60	8.0	3.6	62.1	
CW4-35	CWC4-35	8.5	4.2	35.2	
CW4-50	CWC4-50	8.0	4.2	52.2	
CW4-75	CWC4-75	7.5	4.2	74.5	
CW4-78	CWC4-78	8.0	4.2	78.5	
CW5-70	CWC5-70	8.5	5.1	69.3	
CW6-78	CWC6-78	10.0	6.0	78.0	
CW10-95	CWC10-95	16.0	10.0	95.0	
CW10-115	CWC10-115	16.0	10.0	115.0	

- Material: Steel with PVC tube.

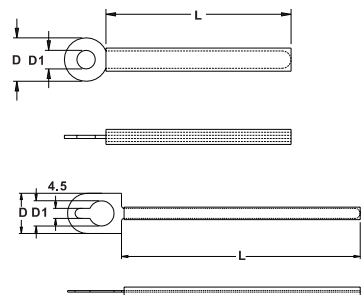


CW10-95 CW10-115

PAPER ROLL CLIP

Unit: mm

Part No.	Dimension	Packing
PRP-35	As Figure	100pcs

- Material: ABS (Natural).






SELF-ADHESIVE WIRE CLIP

Unit: mm

Part No.	A	B	C	Packing
SWC-610	11.0	9.2	8.4	100pcs/bag

- Material: UL approved NYLON 66,94V-2



BANDEX Cable Accessories


GLANDS



BANDEX Cable Accessories

SUPREME-METRIC IP68

Unit: mm

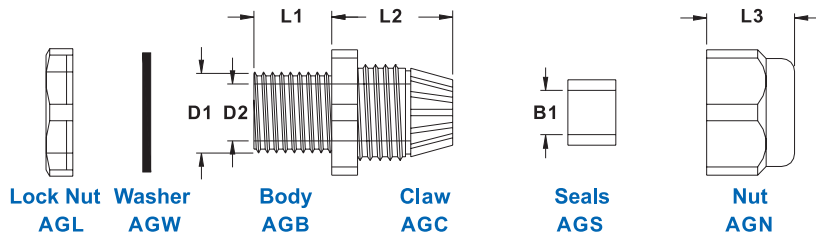

METRIC THREAD

Part No.	Mounting HOLE D1	(mm)	D2	B1	L1	L2	L3	Cable Range	Packing
AG-12	12	1.5	8.3	6.9	7.9	19.6	13.6	3~6.5	50pcs
AG-12L	12		8.3	6.9	7.9	19.6	13.6	3~6.5	
AG-16	16		10.9	9.6	15.5	23.4	16.9	5~10	
AG-20S	20		15.0	14.8	10.0	28.5	18.5	10~14	
AG-20	20		15.0	14.8	15.0	28.5	18.5	10~14	
AG-25	25		18.6	18.4	15.2	29.4	22.3	13~18	25pcs
AG-32	32		26.0	25.0	14.7	34.5	25.7	18~25	
AG-40	40		33.7	33.1	18.4	41.7	31.3	22~32	
AG-50	50		41.9	40.0	17.8	44.2	31.3	30~38	
AG-63	61		55.0	43.2	18.5	44.6	32.7	34~44	
AG-63M	63	54.9	43.2	18.5	44.6	32.7	34~44		
AG-63L	63	56.6	51.5	25.4	49.0	36.8	42~50		
AG-16F	20.8	PF1/2"	11.0	10.0	9.5	20.7	18.7	5~10	50pcs
AG-20F	20.8		14.6	13.0	9.3	24.1	18.5	6~13	


JIS THREAD

Part No.	Mounting HOLE D1	(mm)	D2	B1	L1	L2	L3	Cable Range	Packing
AGJ-14	14	1.5	8.2	6.5	8.0	19.6	13.2	3~6.5	50pcs
AGJ-17	17		10.8	10.3	14.7	23.5	16.8	5~10	
AGJ-21	21		14.9	14.0	12.9	28.3	18.4	10~14	
AGJ-27	27		18.5	18.0	14.7	29.1	22.3	13~18	
AGJ-34	34		26.0	25.0	14.8	34.5	25.7	18~25	25pcs

• Material: UL approved NYLON 66, 94V-2 (Black).

NYLON CABLE GLAND

Unit: mm

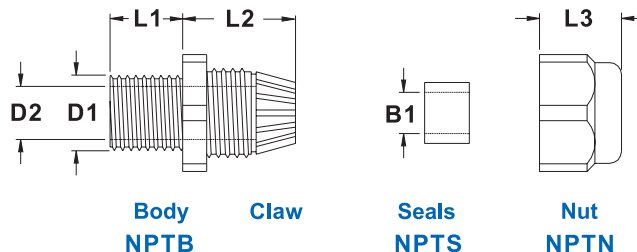


NPT THREAD ※ Available for Lock Nut and washer upon request

Part No.	D1	NPT Thread	D2	B1	L1	L2	L3	Cable Range	Packing
NPT-14	13.3	NPT 1/4"	8.2	6.5	7.8	19.7	13.2	3-6.5	50pcs
NPT-38	16.7	NPT 3/8"	10.8	10.3	14.6	23.8	16.8	5-10	
NPT-12	21.2	NPT 1/2"	14.9	14.0	12.9	28.4	18.7	10-14	
NPT-34	26.3	NPT 3/4"	18.5	18.0	14.5	29.2	22.3	13-18	
NPT-1	33.2	NPT 1"	26	25.0	14.9	35.0	25.7	18-25	25pcs
NPT-114	41.9	NPT 1 1/4"	32	29.0	18.2	41.6	31.1	22-32	10pcs

• Material: UL approved NYLON 66, 94V-2 (Black)

SUPREME-PG THREAD IP68

Unit: mm

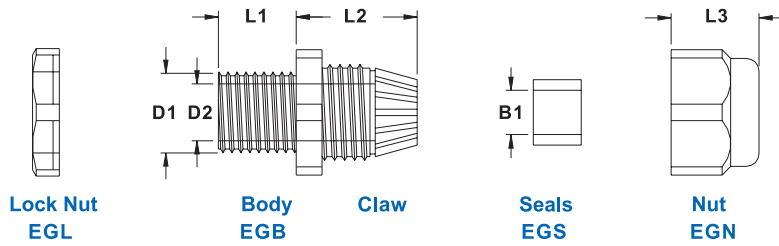


PG THREAD (DIN STANDARD) WITHOUT WASHER

Part No.	PG THREAD	D1	D2	B1	L1	L2	L3	Cable Range	Packing
EG-7	PG-7	12.5	8.3	6.9	7.9	20.0	13.3	3.5~6	50pcs
EG-7LS	PG-7	12.5	8.3	6.9	7.9	20.0	13.3	3.5~6	
EG-9	PG-9	15.2	10.5	7.8	7.9	22.0	15.1	4~8	
EG-9L	PG-9	15.2	10.5	7.8	14.7	22.0	15.1	4~8	
EG-11	PG-11	18.6	13.2	10.8	7.9	23.7	18.3	5~10	
EG-11L	PG-11	18.6	13.2	10.8	14.9	23.7	18.3	5~10	
EG-13.5	PG-13.5	20.4	15.5	12.5	8.9	24.6	18.9	6~12	
EG-13.5L	PG-13.5	20.4	15.5	12.5	15.8	24.6	18.9	6~12	
EG-16	PG-16	22.5	17.2	15.0	9.8	26.2	19.5	10~14	25 pcs
EG-21	PG-21	28.3	22.4	18.5	10.8	30.0	23.7	13~18	
EG-29	PG-29	37.0	30.6	25.3	10.8	35.0	27.4	18~25	10 pcs
EG-36	PG-36	47.0	35.3	36.3	14.5	42.3	30.3	22~32	
EG-42	PG-42	54.0	40.0	40.4	14.5	44.0	31.2	30~38	
EG-48	PG-48	59.3	46.2	46.3	15.6	42.7	31.3	34~44	

GLANDS

NYLON CABLE GLAND STANDARD

Unit: mm

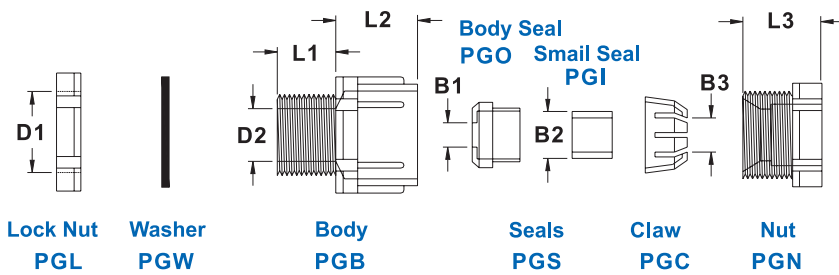


Part No.	Mounting Hole D1	PITCH	D2	B1	B2	B3	L1	L2	L3	Cable Range	Packing
NG-16	16	1.5	10.5		7	10	12	17.0	16.5	5~10	50pcs
NG-20	20		13.7		9	13	13	19.0	19.5	6~13	
NG-25	25		18.5		11	17	13	22.0	21.0	10~18	
NG-32	32		25.0		15	20	15	24.5	24.5	16~22	25pcs
NG-40	40		32.0	22	27	31	21	26.5	27.5	20~27	10pcs
NG-50	50		41.5	32	36	41	23	30.0	31.0	30~41	
NG-63	63		53.2	43	43	51	25	33.0	33.0	40~53	

- Material: UL approved NYLON 66, 94V-2 (Black)
- Well designed for insulation, waterproof and impact resistant. Used extensively for protection and fixation of cables in control panel and apparatus.
- Application:
 1. Mount body to pre-drilled panel hole and fix it with locking nut.
 2. Insert cables through body and then seals consequently. Finally, Press them together with press nut to hold cable in position.

NYLON CABLE GLAND (WITH STRAIN RELIEF)

Unit: mm

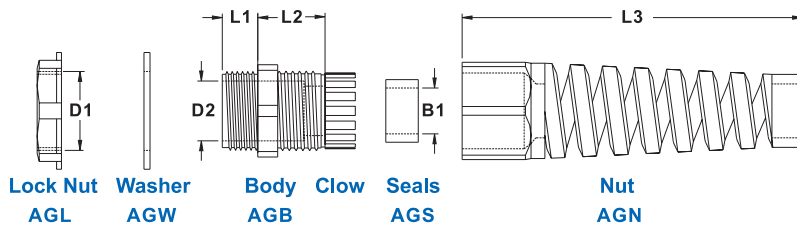


Part No.	Mounting HOLE D1	(mm)	D2	B1	L1	L2	L3	Cable Range	Packing
METRIC THREAD									
AG-12SR	12	1.25	8.3	6.9	7.9	19.6	53.3	3~6.5	50pcs
AG-16SR	16	1.5	10.9	9.6	15.5	23.4	74.9	5~10	
AG-20SR	20	1.5	15.0	14.8	15.0	28.5	96.2	10~14	
AG-25SR	25	1.5	18.6	18.4	15.2	29.4	111.2	13~18	25pcs
PG THREAD									
EG-7SR	11.7	=	8.3	6.9	7.9	20.0	53.3	3.5~6	50pcs
EG-9SR	14.3	=	10.5	7.8	7.9	22.0	62.5	4~8	
EG-11SR	17.3	=	13.2	10.8	7.9	23.7	74.9	5~10	
EG-13.5SR	19.3	=	15.5	12.5	8.9	24.6	85.5	6~12	
EG-16SR	21.3	=	17.2	15.0	9.8	26.2	96.2	10~14	
EG-21SR	27	=	22.4	18.5	10.8	30.0	111.2	13~18	25pcs
JIS THREAD									
AGJ-14SR	14	=	8.2	6.5	8.0	19.6	53.3	3~6.5	50pcs
AGJ-17SR	17	=	10.8	10.3	14.7	23.5	74.9	5~10	
AGJ-21SR	21	=	14.9	14.0	12.9	28.3	96.2	10~14	
AGJ-27SR	27	=	18.5	18.0	14.7	29.1	111.2	13~18	

- ※ EG-SR (WITHOUT WASHER)
 - Strain relief design protect cable from breakage/right angle bending
 - Material: UL approved NYLON 66, 94V-2. (Black)

STRAIN RELIEF-STANDARD (WITH STRAIN RELIEF)

Unit: mm

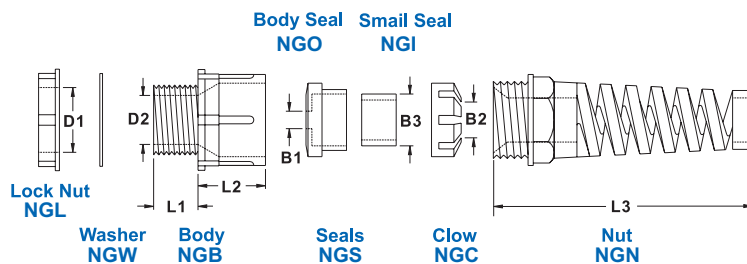


Part No.	Mounting Hole D1	D2	Pitch	B1	B2	B3	L1	L2	L3	Cable Range	Packing
NG-1610	16	10.9	1.5	4.8	7	10	12	17	62	5~10	50pcs
NG-2013	20	14.1		5.1	9	13	13	19	78	6~13	

- Material: UL approved NYLON 66, 94V-2 (Black)

RIGHT ANGLE NYLON CABLE GLAND

Unit: mm

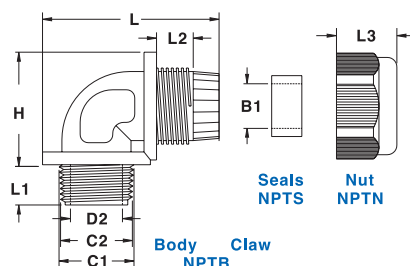

NPT THREAD ※ Available for Lock Nut and washer upon request

Part No.	C1	C2	NPT Thread	D2	B1	L1	L2	L3	L	H	Cable Range	Packing
NPTA-38	16.7	16.2	NPT 3/8"	12.0	9.3	11.7	9.85	16.7	48.5	30.0	5-9	20pcs
NPTA-12	21.2	20.8	NPT 1/2"	14.0	14.5	14.7	11.75	18.4	51.6	31.2	10-13	
NPTA-34	26.3	25.6	NPT 3/4"	19.2	16.4	14.8	12.55	22.3	64.5	41.6	13-16	
NPTA-114	41.9	41.2	NPT 1 1/4"	31.6	29.3	18.8	16.25	31.0	85.0	53.0	22-29	


- Material: UL approved NYLON 66, 94V-2.
- 90 design to protect cable from breakage.

REDUCTION GLAND

METRIC THREAD

Unit: mm

Part No.	D1 (External thread)	D2 (Internal thread)	L (Thread length)	W (Wacross Rlats)	Packing
M2012	M20×1.5	M12×1.5	8.0	24.2	100pcs
M2016	M20×1.5	M16×1.5	8.0	24.2	
M2516	M25×1.5	M16×1.5	8.0	29.0	
M2520	M25×1.5	M20×1.5	8.0	29.0	
M3220	M32×1.5	M20×1.5	10.0	35.9	50pcs
M3225	M32×1.5	M25×1.5	10.0	35.9	
M4032	M40×1.5	M32×1.5	10.0	45.8	25pcs
M5040	M50×1.5	M40×1.5	11.5	55.0	
M6350	M63×1.5	M50×1.5	11.5	67.5	

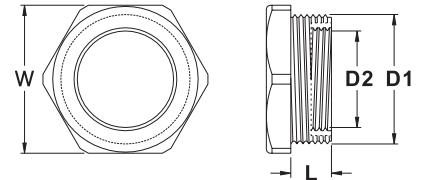

- Material: UL approved Nylon 66, 94V-2.


REDUCTION GLANDS with large metric external thread and small metric internal thread.

TO Allow Switching From large metric external thread to small metric using.

NYLON LOCK NUT

Unit: mm

Part No.	External thread	W mm	H mm	Packing
AGL-12	M12×1.25	17	5.2	50 pcs
AGL-12L	M12×1.5	17	5.2	
AGL-16	M16×1.5	21.8	5	
AGL-20S	M20×1.5	26.6	6	
AGL-20	M20×1.5	26.6	6	
AGL-25	M25×1.5	33	7	
AGL-32	M32×1.5	41.7	8	25 pcs
AGL-40	M40×1.5	48	9	10 pcs
AGL-50	M50×1.5	60	9.8	
AGL-63	M63×1.5	66	10.8	
AGL-63M	M63×1.5	66	10.8	
AGL-63L	M63×1.5	66	10.8	
AG-16F	PF20	26.2	6.6	
AG-20F	PF20	26.2	6.6	

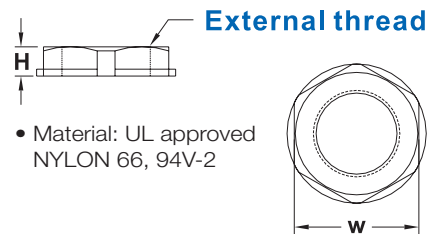

Part No.	External thread	W mm	H mm	Packing
EGL-7	PG7	18.1	5.1	50 pcs
EGL-7LS	PG7	16.7	5.1	
EGL-9	PG9	21	5.1	
EGL-9L	PG9	21	5.1	
EGL-11	PG11	24	5.1	
EGL-11L	PG11	24	5.1	
EGL-13.5	PG13.5	27	6.1	
EGL-13.5L	PG13.5	27	6.1	
EGL-16	PG16	30	6.1	
EGL-21	PG21	36	7.1	
EGL-29	PG29	46.2	8	25 pcs
EGL-36	PG36	59.2	7.8	10 pcs
EGL-42	PG42	65	7.8	
EGL-48	PG48	69.5	7.8	
NPTL-14	NPT 1/4"	17	5.1	50 pcs
NPTL-38	NPT 3/8"	22	5.2	
NPTL-12	NPT 1/2"	27	6.1	
NPTL-34	NPT 3/4"	33	7.1	
NPTL-1	NPT 1"	42.2	8.1	25 pcs
NPTL-114	NPT 1 1/4"	48.8	9	10 pcs

MICRO SWITCH COVERS

Unit: mm

Part No.	Type	To suit cable dia			D	E	F	Packing
		AØ	BØ	CØ				
MSC-90	90°	7	9	-	49	27	19	50pcs
MSC-45	45°	7	9	11	49	27	19	

- Material: Soft PVC (Black)
- Designed to protect micro switch applied on machinery. Also prevent cables from breakage.
- Available in 45°C and 90°C type.



BUSHING GLAND

Unit: mm

Part No.	To suite Panel hole	Length of Thread	C	to suite Cable Dia			Packing
	A	B		D	E	F	
BG10	20.5	13.0	14	6	8	10	50pcs
BG20	23.0	17.5	16.6	10	13	15	

- Material: PVC (Black)
- Interior diameter of each gland available in three sizes D.E.F. Cut unnecessary part (s) optionally to fit your different cable diameters.
- To be applied for fixation and protection of cables.



FLEXIBLE CONDUIT ADAPTOR

Unit: mm

Part No.	TYPE	Conduit Suitable	Packing
FAM-18	Conduit to conduit connector	BG-18P (3/8")	20pcs
FAM-22		BG-22P (1/2")	
FAM-26		BG-26P (3/4")	
FAM-34		BG-34P (1")	
FAB-18	Conduit to junction box connector	BG-18P (3/8")	
FAB-22		BG-22P (1/2")	
FAB-26		BG-26P (3/4")	
FAB-34		BG-34P (1")	
FAP-18	Conduit to pvc pipe connector	BG-18P (3/8")	
FAP-22		BG-22P (1/2")	
FAP-26		BG-26P (3/4")	
FAP-34		BG-34P (1")	

- Material: ABS
- Color: Grey



FLEXIBLE CONDUIT ADAPTOR

Unit: mm

- Material: UL approved NYLON 66, 94V-2 (Grey)


- Constructed of three parts to fix flexible conduit in control panel, machinery and apparatus.

- Application

1. Mount body to pre-drilled panel hole.

2. Insert conduit through nut.

3. Insert conduit to claw and fix it with nut to complete works.

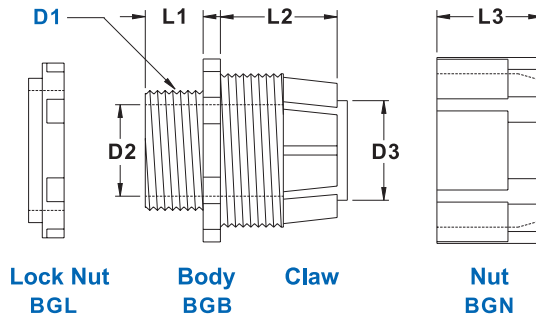

Part No.	D1	D2	D3	L1	L2	L3	Conduit Suitable	Packing
BG-16	15.9	11.0	10.8	10.0	17.9	15.7	BG-16P	50pcs
BG-18	16.0	11.1	13.3	9.7	18.6	15.9	BG-18P (3/8")	
BG-20	19.2	15.0	14.7	10.0	17.7	16.0	BG-20P	
BG-22	20.0	15.4	17.2	9.8	17.6	16.3	BG-22P (1/2")	
BG-26	25.0	18.9	19.8	11.4	23.6	20.6	BG-26P (3/4")	
BG-32	31.2	26.0	24.3	12.0	22.8	20.6	BG-32P	25pcs
BG-34	32.0	26.8	28.6	11.3	23.3	20.7	BG-34P (1")	
BG-40	37.5	31.5	31.6	11.3	23.6	20.7	BG-40P	
BG-42	40.0	32.7	34.8	11.5	23.3	20.8	BG-42P (1 1/4")	10pcs
BG-48	44.0	37.5	40.5	12.6	22.3	20.7	BG-48P	
BG-50	44.0	37.5	39.5	12.6	21.6	20.7	BG-50P	

EASY TYPE FLEXIBLE CONDUIT ADAPTOR

Unit: mm

Part No.		Conduit Suitable	Packing
Grey	Black		
BGQ-16	BGQ-16BK	BG-16P	50pcs
BGQ-18	BGQ-18BK	BG-18P	
BGQ-20	BGQ-20BK	BG-20P	
BGQ-22	BGQ-22BK	BG-22P	
BGQ-25	BGQ-25BK	BG-25P	
BGQ-26	BGQ-26BK	BG-26P	25pcs
BGQ-32	BGQ-32BK	BG-32P	
BGQ-34	BGQ-34BK	BG-34P	

PATENTED INSTALL INSTRUCTION



STEP 1
Insert the conduit into the adaptor.

STEP 2
Push lock out.

STEP 3
Turn it around for locking.



- Material: UL approved NYLON 66 (BLACK).


- Feature: One piece design, easy and faster installation without tool.

FLEXIBLE METAL CONDUIT ADAPTOR

Unit: mm

Part No.	mm	Conduit Suitable	Packing
MG-18	20.6	1/2"	50pcs/bag
MG-26	25.0	3/4"	
MG-32	32.6	1"	25pcs/bag
MG-41	41.5	1 1/4"	

- Material: ABS
- Conduit adaptor designed for metal conduit.

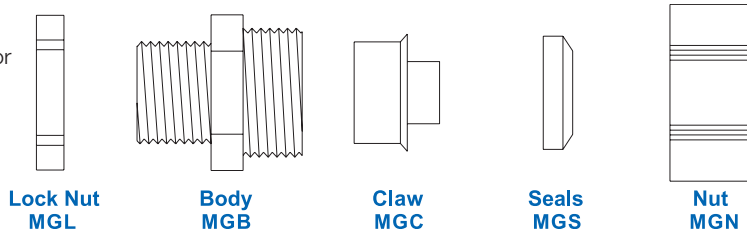

LIGHT DUTY CONDUIT


Unit: mm

• Close design

Part No.	Inner dia	Outside dia	C	Packing
	AØ (mm)	BØ (mm)		
BG-10P	7.4±0.4	10.2±0.4	2.64	300M
BG-14P	10.7±0.4	14.1±0.4	2.04	
BG-16P	10.7±0.4	16.0±0.4	3.30	
BG-18P	13.8±0.4	17.5±0.4	3.10	
BG-20P	14.1±0.4	20.0±0.4	3.70	
BG-22P	17.2±0.4	22.0±0.4	3.10	
BG-25P	18.3±0.4	25.0±0.4	4.10	
BG-26P	21.2±0.4	25.8±0.4	3.10	100M
BG-32P	24.3±0.4	32.0±0.4	3.61	
BG-34P	28.7±0.4	34.0±0.4	3.10	
BG-40P	31.2±0.4	40.0±0.4	4.12	
BG-42P	34.9±0.4	42.0±0.4	3.10	
BG-48P	40.0±0.5	48.0±0.5	2.85	
BG-50P	39.6±0.5	50.0±0.5	4.85	
BG-55P	47.5±0.4	54.5±0.5	2.00	50M
※ BG-60P	52.0±0.5	60.0±0.5	5.80	
※ BG-76P	62.0±0.5	76.0±0.5	5.80	
※ BG-89P	80.0±0.5	89.0±0.5	5.80	



- Material: PE (EVA available)
- For running cable protection in Electrical/ Machinery/Building Harness wiring.
- Flexible body facilitate your corner / elbow wiring.

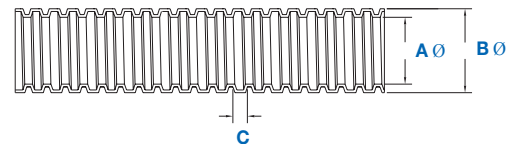

※ Please Call if required as it is under developing now.

GLANDS

NYLON FLEXIBLE CONDUIT


Unit: mm

• Close design

Part No.	Inch	Inner dia	Outside dia	C	Packing
		AØ (mm)	BØ (mm)		
PA-07	1/4"	6.6±0.4	10.0±0.4	2.4	50M
PA-10	5/16"	9.8±0.4	13.0±0.4	2.0	
PA-12	3/8"	12.2±0.4	15.8±0.4	2.1	
PA-17	1/2"	16.8±0.4	21.7±0.4	2.3	
PA-23	3/4"	23.0±0.4	28.5±0.4	2.3	
PA-29	1"	28.6±0.4	34.4±0.4	2.5	
PA-36	1 1/4"	35.8±0.4	42.5±0.5	2.0	
PA-48	2"	47.5±0.4	54.5±0.5	2.0	25M



- Material: NYLON (Black)
- For running cable protection in Electrical / Machinery / Building Harness wiring.
- Flexible body facilitate your corner / elbow wiring.

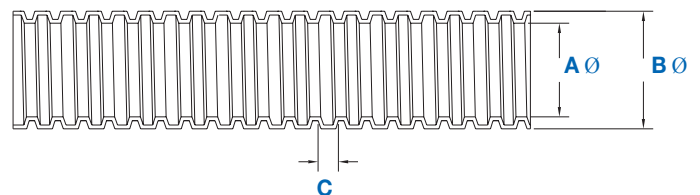

EASY TYPE FLEXIBLE CONDUIT ADAPTOR

Unit: mm

PG THREAD

Part No.	External thread	Conduit Suitable	Packing
PAQ-0707	PG-7	PA-07	50 pcs/bag
PAQ-0709	PG-9	PA-07	
PAQ-1009	PG-9	PA-10	
PAQ-1209	PG-9	PA-12	
PAQ-1211	PG-11	PA-12	
PAQ-12135	PG-13.5	PA-12	
PAQ-1216	PG-16	PA-12	
PAQ-17135	PG-13.5	PA-17	
PAQ-1716	PG-16	PA-17	
PAQ-1721	PG-21	PA-17	
PAQ-2321	PG-21	PA-23	25 pcs/bag
PAQ-2929	PG-29	PA-29	
PAQ-3636	PG-36	PA-36	10 pcs/bag
PAQ-4848	PG-48	PA-48	

PATENTED INSTALL INSTRUCTION



STEP 1
Insert the conduit into the adaptor.

STEP 2
Push lock out.

STEP 3
Turn it around for locking.



- Material: UL approved NYLON (BLACK).
- Feature: One piece design, easy and faster installation without tool.

SPLIT FLEXIBLE CONDUITS


Unit: mm

Part No.		Inner dia	Outside dia	C	Packing
Split design	Close design	AØ (mm)	BØ (mm)		
CR-07P	CRS-07P	7.4±0.4	10.2±0.4	2.60	300M
CR-11SP	CRS-11SP	10.7±0.4	14.0±0.4	1.10	200M
CR-11P	CRS-11P	10.7±0.4	16.0±0.4	3.30	
CR-13P	CRS-13P	13.8±0.4	17.5±0.4	3.10	
CR-15P	CRS-15P	15.0±0.4	19.5±0.4	3.50	100M
CR-17P	CRS-17P	17.2±0.4	22.0±0.4	3.10	
CR-19P	CRS-19P	19.3±0.4	23.8±0.4	3.50	
CR-22P	CRS-22P	21.2±0.4	25.8±0.4	3.10	
CR-24P	CRS-24P	24.3±0.4	32.0±0.4	3.61	50M
CR-25P	CRS-25P	25.0±0.4	30.0±0.4	4.10	
CR-28P	CRS-28P	28.0±0.4	34.0±0.4	3.10	
CR-32P	CRS-32P	31.2±0.4	40.0±0.4	4.12	
CR-35P	CRS-35P	34.9±0.4	42.0±0.4	3.10	
CR-40P	CRS-40P	39.6±0.5	50.0±0.5	4.85	
CR-48P	CRS-48P	47.5±0.4	54.5±0.5	2.00	
※ CR-52P	CRS-52P	52.0±0.5	60.0±0.5	5.80	
※ CR-62P	CRS-62P	62.0±0.5	76.0±0.5	5.80	
※ CR-80P	CRS-80P	80.0±0.5	89.0±0.5	5.80	



Material: PP(BLACK)

- All sizes in mm unless otherwise stated.
 - ID or OD can vary ± 0.4 mm
 - Manufactured from P.P. (Black)
 - Cut to requested length available
- Please contact our office with your requirements.



※ Please Call if required as it is under developing now.

HEAVY DUTY CONVEY FLEXIBLE CONDUIT


Unit: mm

• Close design

Part No.	Inner dia	Outside dia	C	Packing
	AØ (mm)	BØ (mm)		
CF-14P	10.7±0.4	14.1±0.4	2.04	100M
CF-18P	13.8±0.4	17.5±0.4	3.2	
CF-22P	17.2±0.4	22.0±0.4	3.2	
CF-26P	21.2±0.4	25.8±0.4	3.2	
CF-34P	28.7±0.4	34.0±0.4	3.2	50M
CF-42P	34.9±0.4	42.0±0.4	3.2	




- Material: HDPE (Black)
- Used to protect wiring inside the wall to replace normal PVC pipe. Flexible design for better wire running.

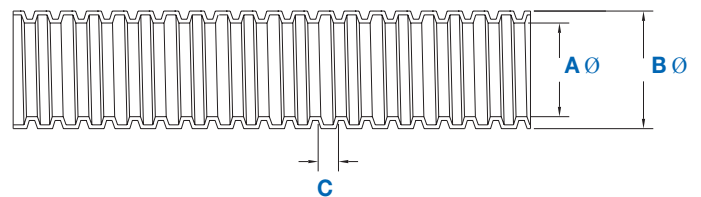


METAL FLEXIBLE CONDUIT


Unit: mm



MCR-TYPE



Lock Nut NBGL
Body NBGB




Claw NBGC
Seals NBGS



Nut NBGN

NBG-TYPE

Part No.	Inner dia		Outside dia	Adaptor Suitable	Packing
	A (Inch)	A (mm)	B (mm)		
MCR-02	1/4"	6.5	11.0	NBG-02	100M
MCR-03	3/8"	10.0	14.4	NBG-03	50M
MCR-04	1/2"	12.8	17.5	NBG-04	
MCR-05	5/8"	16.0	20.8	NBG-05	
MCR-06	3/4"	20.2	25.5	NBG-06	
MCR-08	1"	26.2	32.4	NBG-08	30M
MCR-10	1 1/4"	32.5	39.0	NBG-10	
MCR-12	1 1/2"	39.3	46.2	NBG-12	25M
MCR-16	2"	51.3	59.5	NBG-16	20M
MCR-20	2 1/2"	62.9	72.2	NBG-20	10M
MCR-24	3"	77.5	88.9	NBG-24	
MCR-32	4"	101.6	113.9	NBG-32	

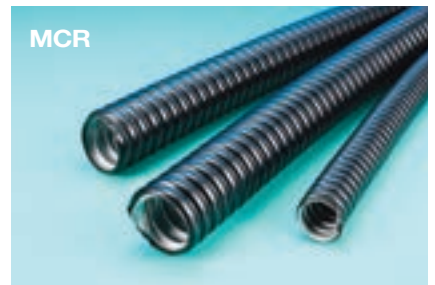

• Material: PVC × METAL



BANDEX Cable Accessories

BUSHINGS





MOVABLE BUSHING

Unit: mm

Part No.	T	Max. chassis Thickness	Packing	Material
MB-008	0.8	Under 0.8	100M/bag	PP
MB-010	1.0	1.0		
MB-012	1.2	1.0-1.2		
MB-016	1.6	1.0-1.6		
MB-020	2.0	1.6-2.0		
MB-024	2.4	2.0-2.4		
MB-032	3.2	2.4-3.2		
MB-045	4.5	3.2-4.5		
MBH-008	0.8	under 0.8	100M/RL	PP
MBH-010	1.0	1.0		
MBH-012	1.2	1.0-1.2		
MBH-016	1.6	1.0-1.6		
MBH-020	2.0	1.6-2.0		
MBH-024	2.4	2.0-2.4		
MBH-032	3.2	2.4-3.2		
MBH-045	4.5	3.2-4.5		



- PP extruded movable bushing.
- 10M per roll packed in a plastic bag.
- Cut to fit any hole sizes for protecting cords, wires, cables against damage from sharp panel edges.
- Also available in moulded nylon bushing. 25cm per piece packed per bag. For your order, please add "N" to standard Part no. Otherwise, will be treated as standard ones.



STRAIGHT CUTTING

MBC-012	1.2	1.0-1.2	10M	PE
MBC-016	1.6	1.0-1.6		
MBC-020	2.0	1.6-2.0		
MBC-024	2.4	2.0-2.4		
MBC-032	3.2	2.4-3.2		
MBC-045	4.5	3.2-4.5		

Part No.	T	Max. chassis Thickness	Packing	Material
MB-010N	1.0	1.0	25 cm/per pcs	Nylon
MB-016N	1.6	1.0-1.6		
MB-020N	2.0	1.6-2.0	100 pcs/bag	
MB-024N	2.4	2.0-2.4		
MB-032N	3.2	2.4-3.2		
MB-045N	4.5	3.2-4.5		



EDGING GROMMET

Unit: mm

Part No.	A mm	B mm	C mm	Max. chassis Thickness	Packing
ED-010	0.5	1.0	3.6	1.0	10M/bag
ED-012	0.6	1.2	3.4	1.0-1.2	
ED-016	0.9	1.6	4.6	1.2-1.6	
ED-020	1.1	2.0	4.1	1.6-2.0	
ED-024	1.2	2.4	5.07	2.0-2.4	
ED-032	1.5	3.2	5.8	2.4-3.2	
ED-055	4.5	5.5	7.9	4.5-5.5	





- Material: PE Natural
- Cut length optionally to fit your chassis edging protection or other application for smoothing edges.



STRAIN RELIEF BUSHING

Unit: mm

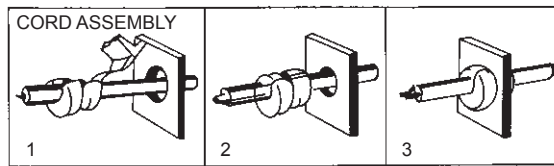

Part No.	Cross Section Shape	Wires Accommodate		Mounting Hole		Part Length D	Max Chassis Thickness F	Packing
		UL Wire	Size	A	B			
SB-F21	Flat	SPT-1#18	2.3x4.5 / 2.8x5.3	9.5	7.7	10.3	0.5-1.6	100pcs (1000pcs)
SB-F23		SPT-1#18	2.3x4.5 / 2.8x5.3	9.5	8.7	10.3	1.8-3.2	
SB-F31		SPT-1#18	3.0x5.6	11.0	9.9	10.3	1.0-1.6	
SB-F32		SPT-1#18	3.0x5.6	11.0	9.9	10.3	1.9-2.5	
SB-F41		SPT-2#18	3.0x7.1 / 3.8x7.6	12.7	11.3	10.3	0.5-1.6	
SB-F42		SPT-2#18	3.0x7.1 / 3.8x7.6	12.7	11.8	10.3	1.8-2.5	
SB-F51		SPT-3#18	5.0x10.4	14.3	13.2	15.2	0.5-1.6	
SB-F53		SPT-3#18	5.0x10.4	14.3	13.2	15.2	1.8-3.5	
SB-F83		Alt Condition Wire 3C 2mm ²	6.0x13.0	21.6	21.3	20.4	2.0-3.4	
SB-5R1	Round	SVI, SVT 3C #18	6.20~7.40	12.7	11.5	11.0	0.5-1.6	
SB-5R2		SVI, SVT 3C #18	6.20~7.40	12.7	11.5	11.0	1.8-2.5	
SB-6W2		SJT 3C #18	7.60	12.7	11.8	11.0	1.8-2.3	
SB-6P1		SJT 3C #18	7.40~8.20	15.9	14.0	14.8	0.5-1.6	
SB-6P3		SJT 3C #18	7.40~8.20	15.9	14.0	14.8	1.9-3.2	
SB-6R1		SJ, SJT, 3C #16	8.20~9.20	15.9	14.0	14.8	0.5-1.6	
SB-6R3		SJ, SJT, 3C #16	8.20~9.20	15.9	14.0	14.8	1.9-3.2	
SB-7R1		SJT, 3C #14	9.20~10.50 / 110	19.0/19.8	17.1	19.0	0.5-1.6	
SB-7R3		SJT, 3C #14	9.20~10.50 / 110	19.0/19.8	17.1	19.0	1.9-3.2	
SB-8R3		SJT, 3C #12	120~15.20	22.2	21.3	20.6	1.9-3.2	
SB-9R1		#18 20-30pcs	110~150	19.0	19.0	17.5	0.5-1.6	
SB-9R7	SJT, 3C #10	15.20~16.30 / 17.50	28.0/30.2	25.5	25.2	1.0-3.2		

- Material: UL NYLON 66, 94V-2 (Black)
- Cust assembly cost, prolongs cords life. Used extensively for protecting cords of computer, apparatus... etc.

STRAIN RELIEF BUSHINGS ASSEMBLY TOOL

Unit: mm

Part No: KT-1 (Stainless)

Applicable:	SB-F21	SB-F23	SB-F31	SB-F32
Bushings	SB-F41	SB-F42	SB-F51	SB-F53
	SB-5R1	SB-5R2	SB-6W2	SB-6P1
	SB-6P3	SB-6R1	SB-6R3	SB-7R1
	SB-7R3	SB-8R3	SB-9R7	




FLEXIBLE RIGHT ANGLE STRAIN RELIEF BUSHING

Unit: mm

Part No.	Cross Section Shape	Wires Accommodate		Mounting Hole		Part Length D	Max. Chassis Thickness F	Packing
		UL	Size	A	B			
SB-F42LF	Flat	SPT-2	3.3x6.6/3.6x7.2	12.7x13.2/13.2x13.7	10.9	20.5	1.5~2.0	100pcs

- Material: UL approved NYLON 66, 94V-2 (Black)
- Assemble according to photos sequence above.
- Protect power cable from computer, house appliance or electronic/electrical equipment when power cable run out from bottom of equipment.
- Strain relief design protect power cord from breakage.

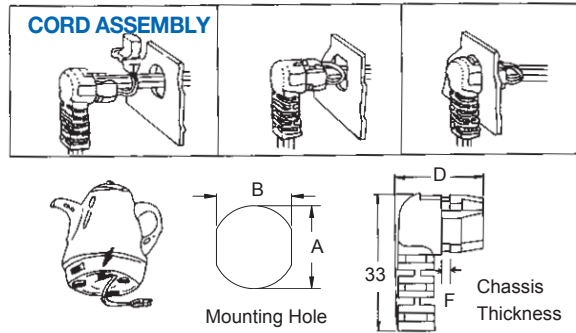


FLEXIBLE STRAIN RELIEF BUSHING

Unit: mm

Part No.	Cross Section Shape	Wires Accommodate		Mounting Hole		Part Length D	Max. Chassis Thickness F	Packing
		UL	Size	A	B			
SB-F52F	Flat	SPT-2	4.6x8.0	14.3	13.2	36.0	0.8~2.3	100pcs

- Material: UL approved NYLON 66, 94V-2 (Black)


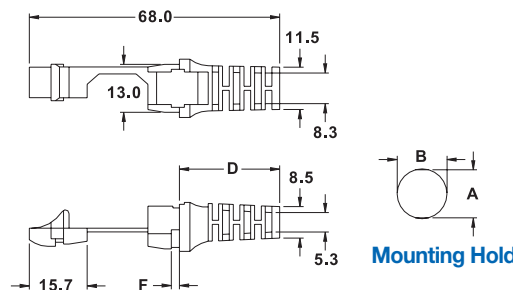


RIGHT ANGLE STRAIN RELIEF BUSHING

Unit: mm

Part No.	Cross Section Shape	Wires Accommodate		Mounting Hole		Part Length D	Max. Chassis Thickness F	Packing
		UL	Size	A	B			
SB-F42L	Flat	SPT-1 / SPT-2	3.0x5.6 / 3.8x7.1	12.7	11.8	17.7	1.8~2.6	100pcs

- Material: UL approved NYLON 66, 94V-2 (Black)
- Assemble according to photos sequence above.
- Protect power cable from chassis.
- L type design facilitate power cord runs out.

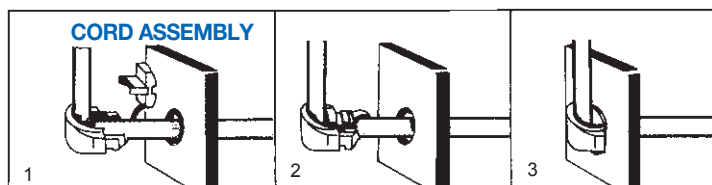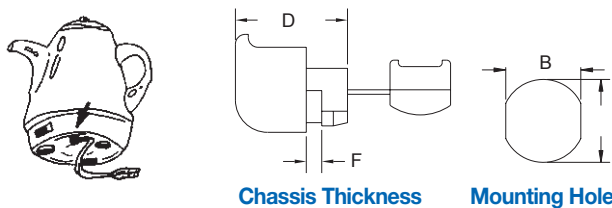



EASY FIT GROMMET 【open/closed】

Unit: mm



Part No.		A mm	B mm	C mm	D mm	E mm	F mm	Packing
Open	Close							
GE-2015	GEC-2015	23.9	19.6	15.5	2.1	2.0	3.9	100pcs
GEQ-2015	GECQ-2015	23.9	19.6	15.5	2.1	2.0	3.9	
GEQ-2621	GECQ-2621	30.0	26.0	20.8	2.4	2.4	3.8	

※ Available with soft tupe upon requested.

• Material: PVC (Black)



GE TYPE



GEC TYPE


GROMMET 【open/closed】

Unit: mm


Part No.		A mm	B mm	C mm	D mm	E mm	Packing
Open	Close						
GM-0603	GMC-0603	8.5	6.0	3.0	4.7	1.7	100pcs
GM-0705	GMC-0705	10.2	7.2	5.0	4.4	1.7	
GM-1006	GMC-1006	13.3	10.0	6.4	6.3	1.7	
GM-1108	GMC-1108	15.5	11.0	7.8	9.0	3.0	
GM-1410	GMC-1410	19.5	13.9	10.5	6.4	3.4	
GM-2015	GMC-2015	23.7	20.1	15.5	6.1	1.7	
GM-2518	GMC-2518	29.9	25.1	18.9	7.2	1.5	
GM-3225	GMC-3225	38.1	31.7	25.0	7.8	1.5	

• Material: PVC (Black)


※ Available with soft tupe upon requested, please add "Q" to item no. as GMQ-0603/GMCQ-0603.



GM TYPE



GMC TYPE



GM-1108



HOLE PLUG




Unit: mm

Part No.	Mounting Hole	B/mm	C/mm	Packing
HP-5	4.5	6.3	5.9	
HP-8	7.9	10.3	8.1	
HP-10	9.5	13.0	10.5	
HP-13S	12.7	14.5	10.1	
HP-13	12.7	16.5	10.9	
HP-16	15.9	19.5	10.0	
HP-19	19.0	22.9	10.0	
HP-22	22.2	25.8	11.3	
HP-25	25.3	29.0	11.6	
HP-30	30.0	34.2	12.0	
HP-38	38.1	42.1	11.2	
HP-45	44.5	49.7	11.8	

• Material: UL approved NYLON 66, 94V-2 (Black)

• HOLE PLUG close your unneeded holes with fingertip pressure at low cost and assure good appearance.


• Available in application for chassis thickness Under 3.2mm

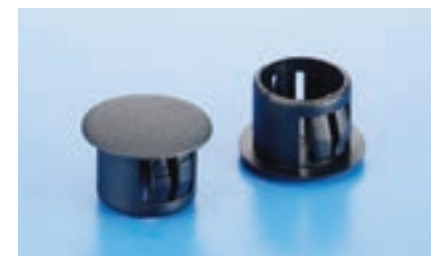



SNAP BUSHING

Unit: mm

Part No.	Mounting Hole	B mm	C mm	L mm	T mm	Packing
SB-7S	7	5.8	8.8	6.1	1.3	100pcs
SB-8S	7.8	6.8	9.8	6.0	1.5	
SB-12S	11.9	9.2	13.7	6.3	1.5	
SB-22S	22.2	19.6	24.0	6.5	1.5	



Standard Design



SB-8S,12S,22S



SB-8A	7.8	5.1	10.3	8.0	1.6	100pcs
SB-8	7.8	5.8	10.5	8.0	1.6	
SB-10	9.5	6.4	12.0	10.3	1.6	
SB-10M	9.5	7.8	13.0	10.5	1.6	
SB-13	12.7	8.0	15.0	10.3	1.6	
SB-14	14.0	11.4	17.0	10.3	1.5	
SB-16	15.9	12.7	18.6	10.3	1.6	
SB-19	19.0	14.3	21.7	10.3	1.6	
SB-19M	19.0	15.8	21.7	10.3	1.6	
SB-22	22.2	17.5	24.2	11.5	1.6	
SB-22M	22.2	18.9	24.2	11.5	1.6	
SB-26	25.5	19.1	28.5	11.5	1.6	
SB-30	30.0	24.1	33.3	11.5	1.6	
SB-38	38.1	29.0	42.1	11.4	1.5	
SB-45	44.5	35.4	47.8	11.6	1.5	
SB-50	50.1	41.6	54.6	11.8	1.6	

- Material: UL approved NYLON 66, 94V-2 (Black)
- SNAP BUSHING smooth and insulate your raw-edged holes in metal chassis.
- Locking into hole firmly with fingertip pressure.
- Protect electrical cables, ropes, utility lines through metal holes.
- Available in application for chassis thickness form 0.8mm to 3.2mm


SNAP BUSHING 【open/closed】

Unit: mm

Part No.	Mounting Hole	B mm	C mm	L mm	Packing
OSB-9S	9.5	6.5	11.3	6.1	100pcs (1000pcs)
OSB-12S	12.7	9.6	15.8	7.3	
OSB-10	9.0	6.0	11.8	9.8	
OSB-13	12.5	7.5	15.1	10.3	
OSB-16	15.5	11.2	18.5	10.3	
OSB-19	18.4	12.5	21.0	10.3	
OSB-22	22.0	17.0	24.6	10.3	
OSB-26	25.5	20.0	28.0	10.6	



Standard Design





OSB-9S,OSB-12S

- Material: UL approved NYLON 66, 94V-2 (Black)
- Protect power cord and smooth you chasis hole.
- Under 3.2mm chassis.
- Finger-tip pressure to install. No tool is needed.
- Can be applied after power cable was installed.

SNAP BUSHING

Unit: mm

Part No.	Mounting Hole	B mm	C mm	L mm	Packing
RSB-16	15.9	11.1	18.3	10.3	100pcs
RSB-19	18.8	12.7	21.8	9.9	
RSB-21	20.6	12.7	22.6	9.9	
RSB-22	22.2	14.3	23.8	11.5	
RSB-25	25.3	20.4	28.5	11.3	
RSB-28	27.6	22.4	30.8	11.3	
RSB-35	34.2	29.3	37.5	11.3	
RSB-38	38.0	31.0	41.0	11.0	

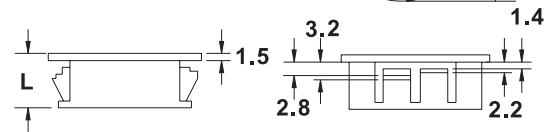


- Material: UL approved NYLON 66, 94V-2 (Black)
- Universal design to hold various cable range with a fix size.

SCREW PLUG

PG THREAD

Unit: mm

Part No.	External Thread	A mm	B mm	C mm	D mm	Packing
PSP-7	PG-7	11.7	14.8	10.0	6.0	100pcs
PSP-9	PG-9	15.7	18.7	10.4	6.0	
PSP-11	PG-11	19.9	21.7	10.4	6.0	
PSP-13.5	PG-13.5	24.7	23.7	10.3	6.0	
PSP-16	PG-16	31.7	27.0	10.3	6.0	
PSP-21	PG-21	39.9	32.8	12.8	7.8	
PSP-29	PG-29	49.4	44.1	13.3	7.8	50pcs
PSP-36	PG-36	47.0	52.6	13.7	7.7	10pcs
PSP-42	PG-42	49.4	59.5	16.3	9.6	
PSP-48	PG-48	62.4	64.2	18.0	11.8	

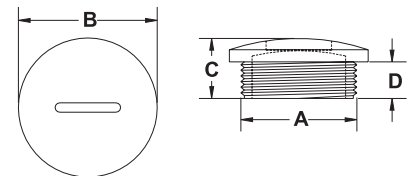


- Material: UL approved Nylon 66, 94V-2
- Color: Black (Grey available)

SCREW PLUG

METRIC THREAD

Unit: mm

Part No.	External Thread	A mm	B mm	C mm	D mm	Packing
MSP-12	M12×1.5	11.7	15.0	10.0	6.0	100pcs
MSP-16	M16×1.5	15.7	20.0	10.5	6.0	
MSP-20	M20×1.5	19.9	24.0	10.5	6.0	
MSP-25	M25×1.5	24.7	29.7	12.8	7.8	
MSP-32	M32×1.5	31.7	36.6	13.3	7.8	50pcs
MSP-40	M40×1.5	39.9	45.8	13.4	7.8	10pcs
MSP-50	M50×1.5	49.4	55.5	16.2	9.8	
MSP-63	M63×1.5	62.4	69.3	17.5	11.8	

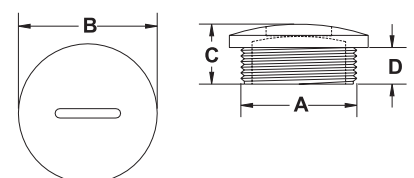


- Material: UL approved NYLON 66, 94V-2
- Color: Black (Grey available)


PLUG COVER

Unit: mm

Part No.	Dimensoin	Design	Packing
PR-2	AS Figure	Standard	100pcs
PR-3		Ground	

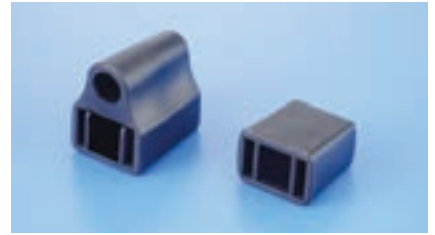


- Material: PE (Black)

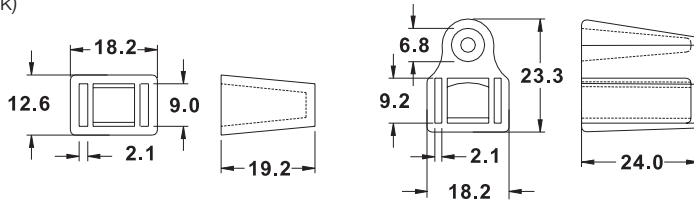

PR-2

PR-3

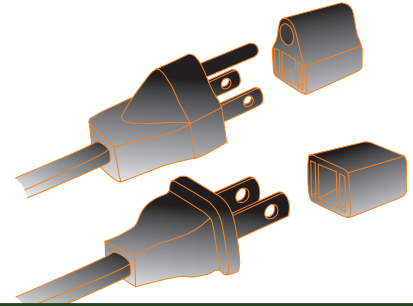


HOUSING COVER

Unit: mm

Part No.	A	B	C	D	E	Packing	SUITABLE SOCKET
HR-9M	20.0	11.0	9.2	7.2	6.1	100pcs	9 pin male
HR-9F	18.1	9.2	7.85	6.5	5.7		9 pin female
HR-15M	28.2	10.9	9.1	7.0	6.0		15 pin male
HR-15F	26.5	9.5	7.5	6.9	5.9		15 pin female
HR-25M	42.0	10.9	9.1	7.3	6.3		25 pin male
HR-25F	40.6	9.5	7.8	6.8	5.9		25 pin female
HR-37F	57.5	10.9	8.3	7.5	6.5		37 pin female



- Material: PE
- PE injected cover to protect pin connector from dirty.

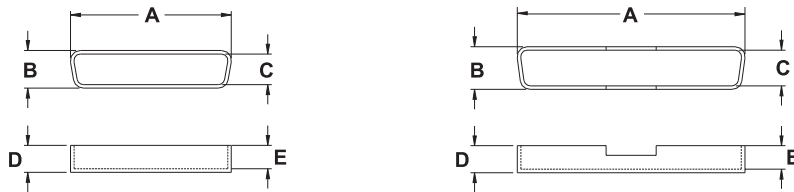

HR-9M,HR-9F,HR-15M,HR-15F,HR-25M,HR-25F

HR-37F



HOUSING COVER

Unit: mm

Part No.	Dimensoin	Packing
USB-1	AS Figure	100pcs



- Material: PE
- PE injected cover to protect pin connector from dirty.

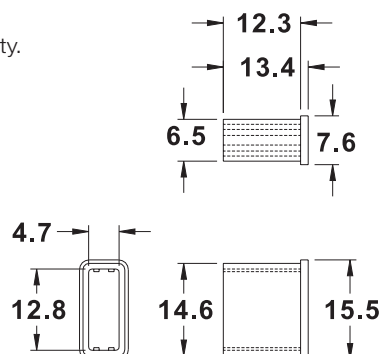


HOUSING COVER

Unit: mm

Part No.	A mm	B mm	C mm	D mm	Packing
RHR-6	8.2	8.8	7.3	6.1	100pcs
RHR-7	8.0	3.0	2.5	6.6	
RHR-8	10.4	8.0	6.9	8.3	

- Material: NYLON 66, 94V-2
- To protect pin connector from dirty.

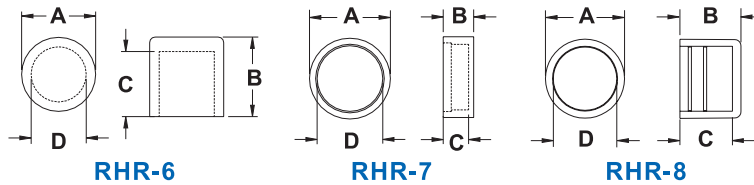


SQUARE HEAD GROMMET NUT

Unit: mm

Part No.	A mm	B mm	C mm	D mm	Packing
SGN-07	9.6	7.2	3.0	8.9	100pcs

- Material: UL approved NYLON 66, 94V-2




FUSE COVER

Unit: mm

Part No.	Dimension	Packing
FR-1	As Figure	100pcs

- Material: Transparent PVC
- To protect fuse from dirty.



BANDEX Cable Accessories

INSULATING



HEAT SHRINK



Unit: mm



INSULATING

Part No. 125°C UL CSA	Range (mm)		Standard length (m)
	Expanded (min)	Recovered (min)	Spool
F32-1	1.4 ± 0.2	0.5	200
F32-1.5	2.0 ± 0.2	0.75	200
F32-2	2.5 ± 0.2	1.0	200
F32-2.5	3.0 ± 0.2	1.25	200
F32-3	3.5 ± 0.3	1.5	200
F32-3.5	4.0 ± 0.3	1.75	200
F32-4	4.5 ± 0.3	2.0	200
F32-5	5.4 ± 0.3	2.5	100
F32-6	6.4 ± 0.4	3.0	100
F32-7	7.4 ± 0.4	3.5	50
F32-8	8.4 ± 0.4	4.0	50
F32-9	9.4 ± 0.4	4.5	50
F32-10	10.4 ± 0.4	5.0	50
F32-11	11.4 ± 0.4	5.5	50
F32-12	12.4 ± 0.4	6.0	50
F32-13	13.5 ± 0.4	6.5	50
F32-14	14.5 ± 0.4	7.0	50
F32-15	15.5 ± 0.5	7.5	50
F32-16	16.8 ± 0.5	8.0	50
F32-18	18.7 ± 0.5	9.0	50
F32-20	21.2 ± 0.6	10.0	50
F32-22	23.2 ± 0.6	11.0	50
F32-25	26.1 ± 0.8	12.5	50
F32-28	29.0 ± 1.0	14.0	50
F32-30	32.0 ± 1.0	15.0	50
105°C UL			
F32-35 FZ-35	37.0 ± 1.0	17.5	50
F32-40 FZ-40	43.0 ± 1.5	20.5	50
F32-50 FZ-50	53.0 ± 2.0	25.0	50
F32-60 FZ-60	60 min	30.0	50
F32-80 FZ-80	80 min	40.0	50
F32-100 FZ-100	100 min	50.0	30

Property	Condition	Value
PHYSICAL		
Tensile strength (Kg/mm ²)		1.05min
Elongation (%)		200min.
Tensile Strength after aging (5)	158°C 168hrs &	70 of original min.
Elongation after aging (%)	134°C 60 days	100 min.
Deformation (5)	125°C 1 hr	50 max.
Heat Shock	136°C 1 hr	no crack
Cold bend	10°C 1 hr	no crack
ELECTRICAL		
Dielectric strength (KV)		AC 2.5 min.
Volume resistivity (cm)		10 ¹⁴ min.
CHEMICAL		
Corrosion	136°C 168 hrs	pass
Copper stability	100 elongation min.	
Flammability	w-1	pass

SUMITUBE (F32 UL CSA (125°C))

SUMITUBE F32 is a flexible, flame retardant, irradiated crosslinked, heat-shrinkable, modified polyonlefin tubing that is recognized by Underwriters Laboratories (UL) and Canadian Standards Association (CSA), is a high-reliability products.

SUMITUBE F32 represents the excellent balance of property for general purpose use such as insulation or jacketing of electronic components, wire marking, colour coding where flame retardance or UL and CSA recognition should be needed.

"SUMITUBE" is a registered trade of "SUMITOMO" electric Japan.

Standard colours: Black, White, Red, Blue, Yellow, Green, Brown, Grey Orange, Purple. Clear also available in different grade.

THIN WALL WATERPROOF / IRRAX SLEEVE

Unit: mm

Part No. 125°C UL CSA	Range mm				Standard
	Expanded (min)		Recovered (min)		Cut
	I.D.	Wall Thickness	I.D.	Wall Thickness	M
W3F2-1/8	3.2	0.35	0.6	0.95	1.22m
W3F2-3/16	4.8	0.45	1.5	1.1	
W3F2-1/4	6.4	0.45	2.0	1.2	
W3F2-3/8	9.5	0.5	3.0	1.3	
W3F2-1/2	12.7	0.55	4.0	1.4	
W3F2-3/4	19.1	0.65	8.0	1.6	
W3F2-1	25.4	0.75	10.5	1.9	



- W3F2 is a flexible thin wall, flame retardant, irradiated, crosslinked, dual walled, heat shrinkable, modified polyolefin tubing.
- 3:1 shrink ratio
- Inner meltable adhesive lining.
- Colours black, brown, red, orange, yellow, green, blue, violet, grey, white.

MEDIUM WALL WATER PROOF / IRRAX SLEEVE


Unit: mm

Part No.	Range mm O		W	Standard
	Expanded (min)	Recovered (min)	Thickness (nominal)	Cut
SCM-04	10.2	3.8	1.5	1.22m
SCM-07	19.0	5.6	2.0	
SCM-11	28.0	9.50	2.0	
SCM-13	33.0	10.2	2.0	
SCM-15	38.1	12.7	2.3	
SCM-17	44.0	14.0	2.3	
SCM-20	52.1	18.2	2.3	
SCM-27	70.0	25.5	2.3	
SCM-35	90.0	30.0	2.5	
SCM-50	125.0	40.0	2.5	



- SCM is a flexible medium wall, flame retardant, irradiated, crosslinked, dual walled, heat shrinkable, heat shrinkable, modified polyolefin tubing.
- 3:1 shrink ratio
- Inner meltable adhesive lining.
- * Normally supplied in Black colour

	TEST METHOD	Typical Data
TENSILE STRENGTH	ISO 37	21 N/mm 2
ELONGATION	ISO 37	550%
COLD BEND	ASTM D2671 (-40°C)	NO CRACK
DIELECTRIC STRENGTH	IEC 243	21 kv/mm
VOLUME RESISTIVITY	IEC 93	2 X 10 14Ohm cm
DIELECTRIC GRAVITY	IEC 250	4.1
WATER ABSORPTION	ASTM D570	0.06%
FLAMMABILITY	BS 4066	PASS
CORROSION	ASTM D2671 (16HR AT 150°C)	PASS
WEATHERING	SCM WEATHER RESISTANT	The material from which scm is manufactured contains carbon black to protect if from ultra-violet light



HEAT SHRINK PACKS

Unit: mm

Part No.	Lengths	Description
HSP-3-BK	9x30.5 cm lengths	F32-3 Black
HSP-5-BK	9x30.5 cm lengths	F32-5 Black
HSP-7-BK	9x30.5 cm lengths	F32-7 Black
HSP-357-C	9x30.5 cm lengths of ea	F32-3.5 White, F32-5 Red, F32-7, Black






- All the above packs are stocked
 - Your header card can be supplied please supply details at the time of ordering.
- We invite your suggestions on different quantities, sizes, lengths & Colour**

LAY FLAT HEATSHRINK FOR INSULATING

Unit: mm

Part No.	Lay Flat	Convert to	Shrinkable	Packing
	Dimension	Dia ϕ	Range	
HS-6.5	6.5	4.1	6.5-3.6	Red. White. Blue. Black 100m/Roll
HS-8.5	8.5	5.2	8.5-4.5	
HS-12	12	7.6	12-6.5	
HS-15	15	10	15-8.5	
HS-20	20	13	21-11	
HS-30	30	19	30-16	
HS-40	40	25	40-22	
HS-50	50	32	50-28	
HS-60	60	38	60-33	
HS-70	70	44	70-37	
HS-80	80	50	80-42	
HS-100	100	63	100-55	
HS-120	120	76	120-65	
HS-150	150	95	150-90	
HS-170	170	108	170-94	
HS-200	200	127	200-110	

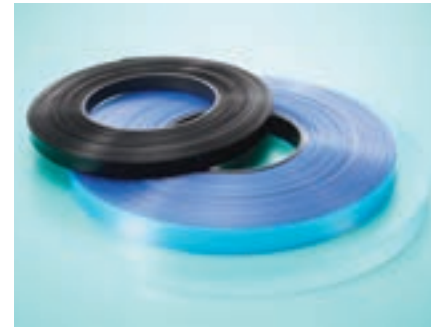



- Material: Rigid Shrinkable PVC
- Used for color distinction and insulation of busbar in control panel. To be shrunk by blower or hot water.
- Maximum service temp: 80°C
- RD: Red WE: White BE: Blue BK: Black

INSULATING

VINYL WIRE END CAPS

Unit: mm

Part No.	Sq	Dimension		Packing
		D1	D2	
V-1.25	1.25	3.3	3.1	100pcs
V-2	2	4.5	3.7	
V-3.5	3.5	5.7	4.1	
V-5.5	5.5	5.7	5.2	
V-8	8	7.2	6.2	
V-14	14	10.0	8.0	
V-22	22	12.0	9.5	
V-38	38	14.0	11.8	
V-60	60	16.8	13.5	
V-80	80	19.0	16.0	
V-100	100	22.0	18.0	50pcs
V-125	125	24.0	20.0	
V-150	150	24.4	22.0	
V-200	200	32.0	24.0	
V-250	250	38.0	26.5	25pcs
V-325	325	38.0	29.0	
V-400	400	44.0	37.0	
V-500	500	50.0	40.5	
V-630	630	52.0	45.0	

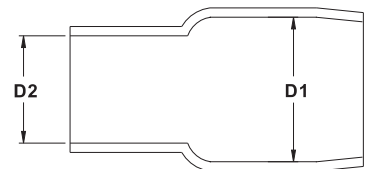

- Material: Soft PVC
- Maximum service temp: 80°C
- For the insulation works of wire end terminal. Performing the work with a simple one-touch to tighten and seal against dirt, moisture and water.
- Standard color: Red, white, blue, yellow, black(Green, brown available on special request)


VINYL WIRE END MARKER CAP

Unit: mm

Part No.	Sq	mm	Color	Packing
MV-1.25	1.25	3.2	Blue \ White Black \ Red Yellow	100pcs/bag
MV-2	2.0	3.6		
MV-3.5	3.5	4.2		
MV-5.5	5.5	5.1		



- Welcome for special request.




VINYL TUBE


Unit: mm

- Material: Soft PVC
- Maximum service temp: 80°C


VT-1




VT-2




VT-3




VT-4




VT-5




VT-6



VT-7




VT-8




VT-9



VT-10




VT-11



END CAP

Unit: mm

Part No.	AØ	B	Color	Packing
EP-0308S	3.0	8.8	Black (Red, White, Blue, Yellow, Green Available)	100pcs
EP-0308	3.0	8.0		
EP-0312	3.2	12.0		
EP-0408	4.0	8.0		
EP-0412	4.8	12.0		
EP-0416	4.8	16.0		
EP-0418	4.8	18.0		
EP-0510	5.7	10.0		
EP-0513	5.7	13.5		
EP-0612	6.3	12.0		
EP-0708	7.6	8.0		
EP-0804	8.0	4.0		
EP-0809	8.0	9.5		
EP-0824	8.0	24		
EP-0912	9.4	12.0		
EP-1113	11.4	13.0		
EP-1216	12.0	16.0		
EP-1420	14.0	20.0		
EP-1435	14.0	35.0		
EP-1713	17.8	13.0		

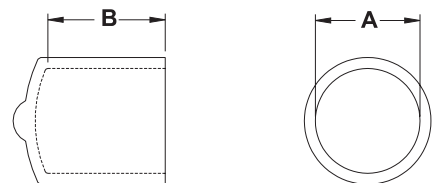


- Material: Soft PVC
- Maximum service temp: 80°C

HEXAGONAL PROTECTION CAP

Unit: mm

Part No.	NUT	Dimension	Packing
HPM-8	8M	As Figure	100pcs

• Material: PE

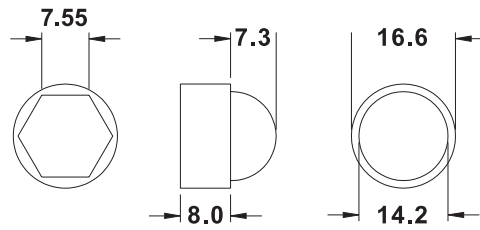


SCREW PROTECTION CAP

Unit: mm

Part No.	Dimension				Packing
	D	D1	H	H1	
SCP-0709	13	7.5	10.2	9.3	100pcs

• Material: PE

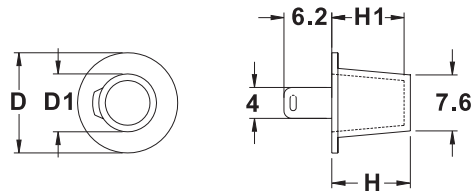

BANDEX Cable Accessories

CABLE CLIPS




CABLE CLIPS (ROUND)

Unit: mm

Part No.	Size			Nail Size	Packing
	W	H	H1		
NK-05S	5	7.6	5.0	2.0x20	100 pcs
NK-06S	6	9.0	6.6	2.0x20	
NK-08S	8	12.9	8.15	2.0x25	
NK-09S	9	12.0	9	2.0x22	
NK-10S	9.3	13.8	10.4	2.0x25	



- Material : High Density PE , Masonry steel nail
- Standard color: Grey (others available upon request)
- Applied for general round cables.
- With nails inserted.

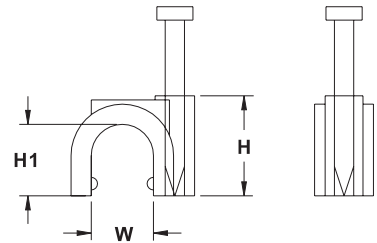

Part No.	Size			Nail Size	Packing
	W	H	H1		
NK-0275	2.75	4.5	2.6	1.65x19	100pcs
NK-035	3.5	5.9	3.7	2.0x15	
NK-04	4	6.6	4.2	2.5x18	
NK-05	5	7.6	5.0	2.5x18	
NK-06	6	9.0	6.6	2.5x18	
NK-06HD	6	10.5	6.9	2.5x20	
NK-07	7	11.0	7.5	2.5x22	
NK-08	8	12.9	8.15	2.5x22	
NK-09	9	12.0	9.0	2.5x22	
NK-10	9.3	13.8	10.4	2.5x25	
NK-11	11	16.6	12.2	2.5x27	
NK-12	12	16.0	12.3	2.5x27	
NK-14	14	20.5	15.6	3.0x35	
NK-16	16.5	21.7	17.0	3.2x38	
NK-18	18	22.0	17.5	3.2x38	
NK-20	20	23.5	18.5	3.2x38	
NK-22	22	27.8	23.0	3.2x42	
NK-25	25	29.0	24.1	3.2x47	
NK-32	32	40.0	33.5	3.6x56	50pcs

CABLE CLIPS


CABLE CLIPS (ROUND EURO TYPE-Multi Size dia.)

Unit: mm

Part No.	CABLE RANGE W	Nail Size	Packing
NC-0507	5~7	2.0x20	100pcs
※ NC-0507L	5~7	2.0x20	
NC-0810	8~10	2.0x25	
NC-1115	11~15	2.0x35	
NC-1619	16~19	2.5x40	



- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- ※ NC-0507L Longer Hook




CABLE CLIPS (ROUND-Multi Size dia.)

Unit: mm

Part No.	Max dia W	Nail Size	Packing
NT-0204	4.1	2.0x20	100pcs
NT-0407	7.0	2.0x20	
NT-0711	9.0	2.0x35	
NT-1114	13.2	2.0x35	



- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)




CABLE CLIP

Unit: mm

Part No.	W	H	H1	Nail Size	Packing
NT-1	4.8	7	2.5	2.0x15	100pcs

- Material : High Density PE , Masonry steel nail
- Standard color: Grey (others available upon request)
- Applied for telephone cords.
- With nails inserted.




COATED COPPER TUBE CLIP

Unit: mm

Part No.	Size				Suitable for coated copper tube	Nails size	Packing
	W	H	H1	H2			
MNC-23	43.5	33.0	26.0	21.5	2~3	4.0x50	50PCS
MNC-24	50.5	42.0	34.5	23.0	2~4	4.0x68	
MNC-25	53.0	45.0	38.0	21.5	2~5	4.0x68	
MNC-35	57.5	45.7	38.3	24.0	3~5	4.0x68	
MNC-46	69.3	48.0	41.3	32.0	4~6	4.0x78	

- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- Function: Special for coated copper pipe in air conditioner




CABLE CLIPS (FLAT)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
NF-0.25	2.1	4.5	1.2		1.65x15	100pcs
NF-05	5.5	5.5	3.1		2.0x15	
NF-06	6.2	6.4	3.8		2.0x15	
NF-06S	6.4	7.0	4.1		2.0x25	
NF-08	8.0	8.0	5.0	1mm ² T & E	2.0x15	
NF-09S	8.5	8.0	5.0	1.5mm ² T & E	2.0x25	
NF-10S	10.0	10.0	6.5	2.5mm ² T & E	2.0x25	
NF-2.3	10.2	8.0	4.6		2.0x25	
NF-14S	11.9	9.6	6.1	6mm ² T & E	2.0x25	
NF-15S	15.0	11.0	6.8	4mm ² T & E	2.0x25	
NFT-1.5	9.8	6.7	4.4	1.5mm ² T & E	2.0x25	
NFT-4.0	11.6	9.7	6.4	4mm ² T & E	2.0x25	
NFD-1.0	16.8	7.2	4.4	1.0/1.5mm ² Double T & E	2.0x25	
NFP-2.1	9.3	8.7	4.0	1 & 1.5mm ² T & E	2.0x25	
NF-09	8.5	8.0	5.2	1.5mm ² T & E	2.5x18	
NF-10	10.0	10.0	6.5	2.5mm ² T & E	2.5x18	
NF-14	13.5	11.6	8.1	6mm ² T & E	2.5x22	
NF-15	15.0	12.8	8.7		2.5x22	
NF-18	18.0	12.9	9.5	10mm ² T & E	2.5x27	
NF-19	19.0	14.2	11.1		2.5x27	
NFT-16	20.2	13.2	10.1	16mm ² T & E	2.5x35	
NFD-2.5	19.3	8.7	5.5	2.5mm ² Double T & E	2.5x30	
NF-5.0	49.0	33.0	26.0		4.0x50	50pcs



- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- Applied for telephone cords.
- With nails inserted.

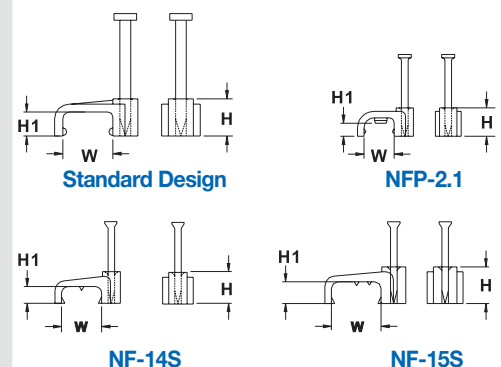


CABLE CLIPS-ROUND (ROUND-DOUBLE NAIL)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
DNR-17	17	21.5	17.7	1/2 "	2.0×44	50pcs
DNR-32	32	40	33.5	1 "	3.6×56	20pcs
DNR-40	40	50	41.0	1 1/4 "	4.0×68	
DNR-50	49	59	50.0	1 1/2 "	4.0×78	
DNR-62	62	71	62.0	2 "	4.5×97	



- Material : High Density PE , Masonry steel nail
- Standard color: Grey (others available upon request)
- Feature: Double nail ensure cable firmly in place.

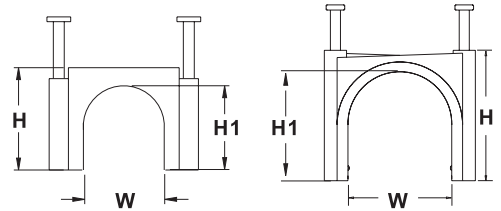

DNR-17

DNR-32, 40, 50, 62

CABLE CLIPS (FLAT)

Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
NF-0.18	4.5	4.3	2.7	0.8m/m ² 2C	2.0×15	100pcs
NFR-1	5.1	6.8	3.0	0.8m/m ² 2C	2.5×18	
NFR-1S	5.1	6.8	3.0	0.8m/m ² 2C	2.0×2.0	

- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- Applied for flat cables.
- With nails inserted.



NF-0.18


NFR-1, NFR-1S

CABLE CLIPS-FLAT (FLAT-DOUBLE NAIL)


Unit: mm

Part No.	Size			Suitable Wires	Nail Size	Packing
	W	H	H1			
DNF-13	12.5	8.0	5.3	#14/2, 14/3, 12/2	1.86×31	100pcs
DNF-17	17.7	14.7	11.5		2.0×44	
DNF-19	18.7	8.0	5.3	#12/3, 10/2, 10/3	1.86×31	
DNF-24	24.0	17.1	13.6		2.0×44	
DNF-37	36.8	26.1	22.5		2.3×50	50pcs

- Material : High Density PE , Masonry steel nail
- Standard color: White (others available upon request)
- Feature: Double nail ensure cable firmly in place.



DNF-13, DNF-19

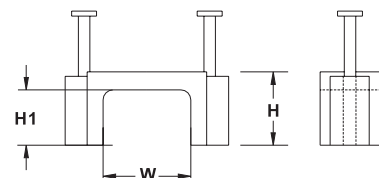


DNF-17, DNF-24, DNF-37

PIN PLUG

Unit: mm

Part No.	W	L	Packing
PP-0518	5	18	100pcs

- Material : High Density PE
- Standard color: White (others available upon request)

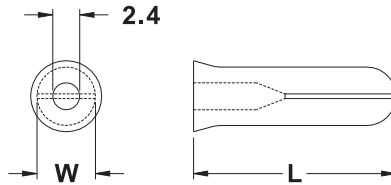

DISPLAY PACKS

Unit: mm

ROUND CLIPS

Part No.	W (mm)	Packing
PNK035	3.5	100pcs/box
PNK04	4	
PNK05	5	
PNK06	6	
PNK07	7	
PNK08	8	
PNK09	9	
PNK10	10	
PNK11	11	
PNK12	12	
PNK14	14	
PNK16	16	
PNK20	20	
PNK22	22	
PNK25	25	25pcs/box
PNK32	32	

FLAT CLIPS

Part No.	W (mm)	Packing
PNF05	5.5	100pcs/box
PNF06	6.2	
PNF08	8.0	
PNF09	8.5	
PNF10	10.0	
PNF14	13.5	
PNF14S	13.5	
PNF15	15	
PNF15S	15	
PNF18	18	
PNF19	19	



BOXING

Design your own boxing with your own company logo printed on the box.

PE BUCKETS

Our unique display buckets which are also available in 2 or 4 compartments allow you the opportunity to create a blend of product mix to meet your own special requirement.

We welcome your orders inquiry but please check first that our display packs can accommodate your intended quantity.



QB-500

CONTENTS:

NC-0810	500pcs	White
---------	--------	-------

QB-800

CONTENTS:

NK04	300pcs	Grey
NK05	300pcs	Grey
NF09	100pcs	White
NF10	100pcs	White

QB-850

CONTENTS:

NK04	300pcs	Grey
NK07	150pcs	Grey
NK09	100pcs	Grey
NF06B	300pcs	Black

BNC-100

CONTENTS:

NC-0507	50pcs	White
NK07	50pcs	White

QBS-400

CONTENTS:

NK06	100pcs	White
NK07	100pcs	White
NK08	100pcs	White
NK09	100pcs	White

QB-1200

CONTENTS:

NK05	1200pcs	Grey
------	---------	------

*AVAILABLE INDIFFERENT QUANTITY/SIZE/COLOR

CABLE CLIPS ALSO AVAILABLE IN 4 COMPARTMENT ROUND OR SQUARE CANISTER PACKING

CABLE CLIPS-FLAT FIGURE 8

PVC HANGERS

A unique display pack, available in 3 handy sizes, can also be printed with your companies own design.

Small Box:- is able to take up to 100 pieces of a 6mm clip

Medium Box:- is able to take up to 100 pieces of a 9mm clip

Large Box:- is able to take up to 100 pieces of a 12mm clip



Of course we welcome your own special requirements, where you are welcome to mix and match size and quantities as you please.

BPC-25

CONTENTS:

NT-1	5pcs
NK05	10pcs
NK07	15pcs
NK10	5pcs

BPC-100

CONTENTS:

CT075-2C	30pcs
CT100-2C	20pcs
KW-1	10pcs
CE-2	9pcs
CE-5	9pcs
CC-05	6pcs
CC-06	8pcs
CC-10	8pcs

SMALL BOX

SNK04	100pcs	White
SNK05	100pcs	White
SNK06	100pcs	White

MEDIUM BOX

MNK07	100pcs	White
MNK08	100pcs	White
MNK09	100pcs	White

LARGE BOX

LNK10	100pcs	White
LNK11	100pcs	White
LNK12	100pcs	White

*AVAILABLE IN DIFFERENT QUANTITY / SIZE / COLOR

BANDEX Cable Accessories


PCB SPACERS AND SUPPORTS



LOCKING CIRCUIT BOARD SUPPORTS

Unit: mm

Part No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
CS-0305	4.8 (3/16")	4.0	1.8	4.8	2.5	100pcs
CS-0305S	4.8 (3/16")	3.0	2.0	3.0	2.0	
CS-0406	6.4 (1/4")	4.0	1.8	4.8	2.5	
CS-0406S	6.4 (1/4")	4.0	2.3	4.8	2.0	
CS-0610	9.3 (3/8")	4.0	1.8	4.8	2.5	
CS-0813	12.7 (1/2")	4.0	1.8	4.8	2.5	
CS-1016	15.9 (5/8")	4.0	1.8	4.8	2.5	
CS-1219	19.1 (3/4")	4.0	1.8	4.8	2.5	
CS-1422	22.2 (7/8")	4.0	1.8	4.8	2.5	
CS-1625	25.4 (1")	4.0	1.8	4.8	2.5	
CS-1828	28.5 (1 1/8")	4.0	1.8	4.8	2.5	
CS-2236	35 (1 3/8")	4.0	1.8	4.8	2.5	
CS-2236L	35 (1 3/8")	4.8	1.8	4.8	2.5	

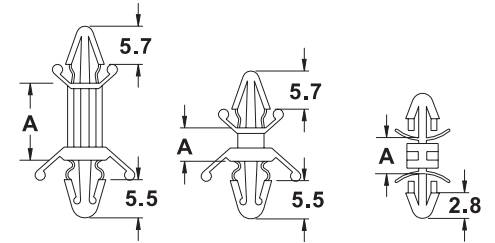

Standard Design

CS-0305
CS-0406

CS-0305S


- Material: UL approved NYLON 66, 94V-2
- By hand to support P.C.B. Can be removed for replacement easily.

PCB SPACERS AND SUPPORTS

PCB SUPPORT

Unit: mm

Part No.	A	P.C.B		Chassis		Packing
		hole	thickness	hole	thickness	
MCS-6	6.0	4.0	1.8	4.8	2.0	100pcs
MCS-8	7.8	4.0	1.7	4.8	5.0	
MCS-12	11.5	4.0	1.7	4.8	5.0	
MCS-19	19.0	4.0	2.0	4.8	2.0	

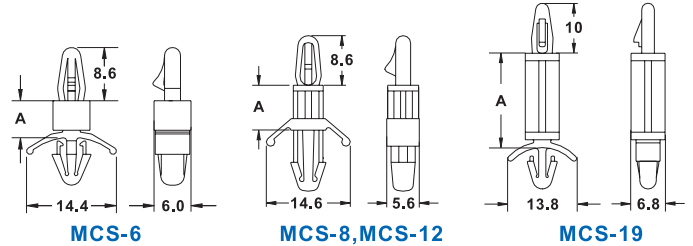

MCS-6

MCS-8, MCS-12

MCS-19


- Material: UL approved NYLON 66, 94V-2

PCB SUPPORT

Unit: mm

Part No.	A	P.C.B		Chassis		Packing
		hole	thickness	hole	thickness	
CS-0305L	5.4	4.0	2.4	4.0	2.4	100pcs (1000pcs)

- Material: UL approved NYLON 66, 94V-2




SUPPORT POST

Unit: mm

Part No.	A	P.C.B		Chassis		Packing
		hole	thickness	hole	thickness	
LCA-14	13.6	2.5	2.0	3.0	1.7	100pcs


- Material: UL approved NYLON 66, 94V-2



MINIATURE SUPPORT POSTS

Unit: mm

Part No.	A	B	PCB		Chassis		Packing
			hole	thickness	hole	thickness	
SP-3	3.2	3.8	4.0	1.6	4.0	1.6	100pcs (1000pcs)
SP-3S	3.2	3.6	3.2	1.6	3.2	1.6	
SP-6	6.3	3.8	4.0	1.6	4.0	1.6	
SP-8	8.0	3.8	4.0	1.6	4.0	1.6	
SP-10	10.5	3.8	4.0	1.6	4.0	1.6	
SP-13	12.7	5.6	4.0	1.6	4.0	1.6	
SP-16	15.9	5.6	4.0	1.6	4.0	1.6	
SP-17	16.5	5.6	4.0	1.6	4.0	1.6	
SP-19	19.1	5.6	4.0	1.6	4.0	1.6	
SP-22	22.2	5.6	4.0	1.6	4.0	1.6	
SP-25	25.4	5.6	4.0	1.6	4.0	1.6	

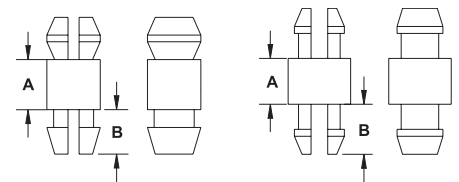

Standard design

SP-3S


- Material: UL approved NYLON 66,94V-2
- Drill 4mm hole on both P.C.B. board chassis before usage.
- For application where the space is limited and extra height is prohibited.

PCB SUPPORT

Unit: mm

Part No.	A	B	PCB		Chassis		Packing
			hole	thickness	hole	thickness	
SPA-28	28.2	3.6	3.6	1.6	3.8	1.6	100pcs (1000pcs)
SPB-6	6.2	5.5	4.0	1.8	4.0	1.8	
SPB-20	20	5.5	4.0	1.8	4.0	1.8	
SPC-9	9.3	4.0	4.0	1.6	4.0	1.6	
SPD-9	9.5	5.5	3.5	1.8	3.5	1.8	

- Material: UL approved NYLON 66,94V-2

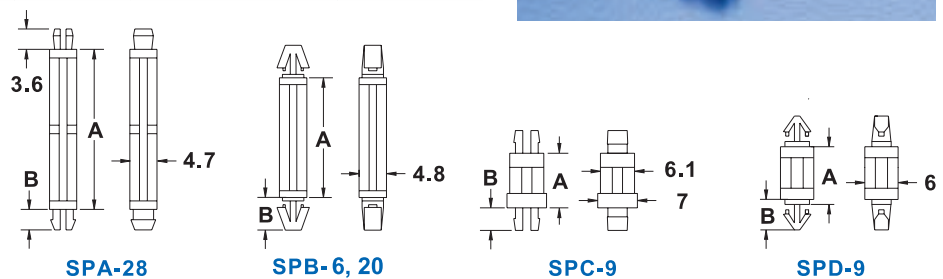

SPA-28

SPB-6, 20

SPC-9


SPD-9

PCB SUPPORT

Unit: mm

Part No.	A	B	PCB		Chassis		Packing
			hole	thickness	hole	thickness	
DS-18	18.2	3.7	2.5	1.6	2.5	1.6	100pcs

• Material: UL approved NYLON 66,94V-2




SCREW FASTENED CIRCUIT BOARD SUPPORTS


Unit: mm

Part No.	A	PCB		Chassis	Packing
		hole	thickness	thickness	
CS-5	4.9(3/16)	4.0	2.0	3.0	100pcs (1000pcs)
CS-10	9.6(3/8)	4.0	2.0	3.0	
CS-13	12.7(1/2)	4.0	2.0	3.0	
CS-19	19.1(3/4)	4.0	2.0	3.0	
CS-28	28.5(1 1/8)	4.0	2.0	3.0	
CS-35	35.0(1 3/8)	4.0	2.0	3.0	
CSA-14	13.9	4.0	2.0	2.5	

• Material: UL approved NYLON 66, 94V-2
 • Attached to chassis by #6(1/8) screw.



CS-TYPE



CSA-14




CSA-14

REVERSE LOCKING CIRCUIT BOARD SUPPORT


Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
RLS-5	5.0	5.5	1.8	100pcs (1000pcs)
RLS-6	6.4			
RLS-8	8.0			
RLS-9	9.8			
RLS-10	10.1			
RLS-12	12.0			
RLS-14	14.0			
RLS-18	18.0			

• Material: UL approved NYLON 66, 94V-2



RLS-5,6,10




RLS-8,9,12,14,18


PCB SUPPORT

Unit: mm


Part No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
RS-2D	2.5	4.0	1.8	5.0	3.2	100pcs
RS-3	3.5	4.0	1.8	5.5	1.4	
RS-5	5.0	4.0	1.8	5.5	1.8	
RS-5D	5.0	4.0	1.8	5.0	3.2	
RS-5S	5.0	3.0	1.7	4.8	2.0	
RS-6	6.1	4.0	1.8	5.5	1.8	
RS-6A	5.6	4.0	1.6	6.4	1.8	
RS-6B	5.6	4.0	1.8	6.4	1.4	
RS-6C	6.1	4.2	1.8	5.2	1.4	
RS-6S	5.9	3.5	1.8	5.3	1.8	
RS-7A	6.6	4.0	1.6	5.4	1.6	
RS-8	8.0	4.0	1.8	5.5	1.8	
RS-8S	6.1	4.0	1.6	5.5	1.8	
RS-10	9.8	4.0	1.8	5.5	1.8	
RS-10A	9.8	4.0	1.6	5.4	1.8	
RS-10L	9.8	4.0	1.6	5.5	1.8	
RS-10S	9.3	4.0	1.6	5.5	1.8	
RS-12	12.0	4.0	1.8	5.5	1.8	
RS-12C	12.1	4.2	1.8	5.2	1.4	
RS-12H	11.8	4.0	1.6	5.5	1.8	
RS-14	14.0	4.0	1.8	5.5	1.8	




Standard design




RS-3,6B




RS-6,10,10S,12H




RS-6C



RS-8S



RS-6A,7A,8A



RS-10L


- Material: UL approved NYLON 66, 94V-2
- Sand on design to lock print circuit board.

CIRCUIT BOARD EJECTOR

Unit: mm

Part No.	Packing
BE-1	100pcs (1000pcs)

- Material: UL approved NYLON 66, 94V-2
- Pre-drilled hole on P.C.B.:2.5-2.6mm.

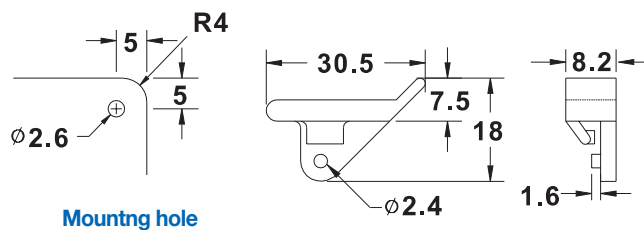


BLIND HOLD CIRCUIT BOARD SUPPORT

Unit: mm

Part No.	A	PCB		Mounting Hole	Packing
		hole	thickness		
BCS-5	5.2	4.4	2.0	7.6	100pcs (1000pcs)

• Material: UL approved NYLON 66, 94V-2

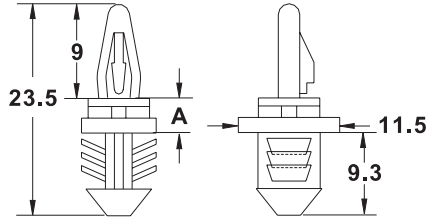


SCREW FASTENED CIRCUIT BOARD SUPPORT

Unit: mm

Part No.	Dimension	PCB		Packing
		hole	thickness	
SCS- 10	10.1	4.0	4.2	100pcs (1000pcs)
SCS- 25	25.4			

• Material: UL approved NYLON 66, 94V-2




PUSH SPACER

Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
PS-5	4.8(3/16)	4.8	2.0	100pcs (1000pcs)
PS-6	6.4(1/4)			
PS-10	9.6(3/8)			
PS-13	12.7(1/2)			
PS-16	15.9(5/8)			
PS-19	19.1(3/4)			
PS-22	22.2(7/8)			
PS-25	25.4(1)			
PS-28	28.5(1 1/8)			
PS-36	35.0(1 3/8)			

• Material: UL approved NYLON 66, 94V-2




PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	Packing
EB-9	13.5	13.6	1.8	8.7	100pcs

• Material: UL approved NYLON 66, 94V-2

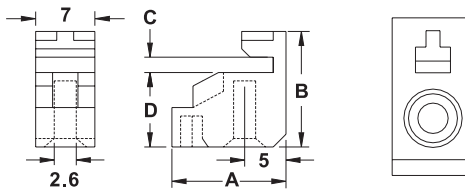


CIRCUIT BOARD EDGE SPACER

Unit: mm

Part No.	A	B	C	D	E	Packing
ES-5A	5.4	2.2	5.5	10.3	9.5	100pcs (1000pcs)
ES-6A	6	1.9	9	10.8	8.7	
ES-6M	5.8	2.2	9.3	10.7	9.5	
ES-6P	6	1.9	9	10.8	8.7	
ES-6V	6	1.9	9	10.8	8.7	
ES-8U	8.4	2.0	6.7	13.3	9.8	



• Material: UL approved NYLON 66, 94V-2.
• Drills holes on chassis board as shown.

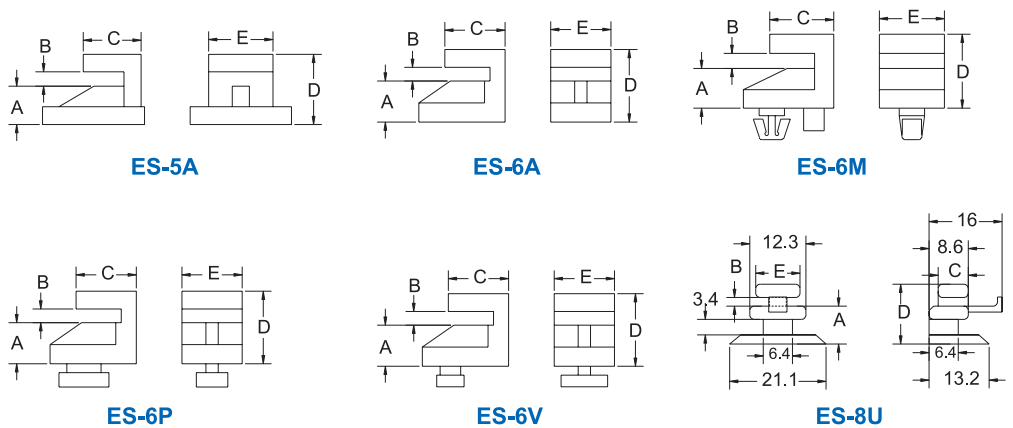


SLIDE SECURE CIRCUIT BOARD SUPPORTS

Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
MS-6	6.4	4.0	2.0	100pcs (1000pcs)

• Material: UL approved NYLON 66, 94V-2
• Drills holes on chassis board as shown.
• Push support into the larger hole and slide onto the smaller one as fixation and then PCB board onto the support.

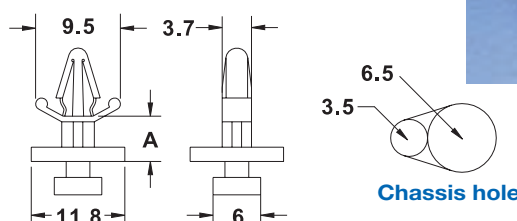

BANDEX Cable Accessories


SLIDE SECURE CIRCUIT BOARD SUPPORT

Unit: mm

Part No.	A	B	C	PCB		Packing
				hole	thickness	
BMS-5	5.6	9.5	11.8	4.0	2.0	100pcs (1000pcs)
BMS-5L7	5.6	9.5	7.1	4.8	2.0	
BMS-5L	5.6	9.5	11.8	4.8	2.0	
BMS-7	6.5	9.5	11.8	4.0	2.0	
BMS-8	8.0	9.5	11.8	4.0	2.0	
BMS-11	11.0	9.0	12.0	4.0	2.0	
HMS-6	6.0	5.0	7.0	4.8	2.0	



• Material: UL approved NYLON 66, 94V-2

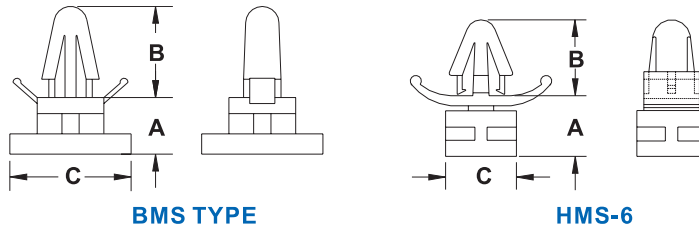

BMS TYPE

HMS-6


PCB SUPPORT

Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
TMS-3GY3	3.2	2.0	0.8	100pcs (1000pcs)
TMS-17	17.2	4.0	1.4	



• Material: UL approved NYLON 66, 94V-2

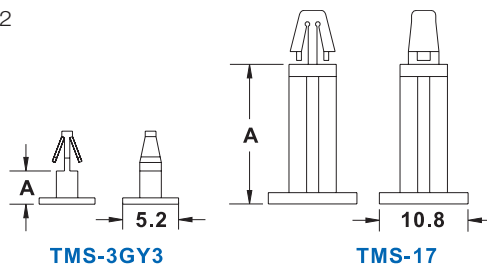

TMS-3GY3

TMS-17


PCB SUPPORT

Unit: mm

Part No.	Dimension		PCB		Packing
	A	B	hole	thickness	
MMS-2	3.2	14.9	3.2	1.8	100pcs (1000pcs)
MMS-21	21.3	17.9	4.0	1.8	



• Material: UL approved NYLON 66, 94V-2

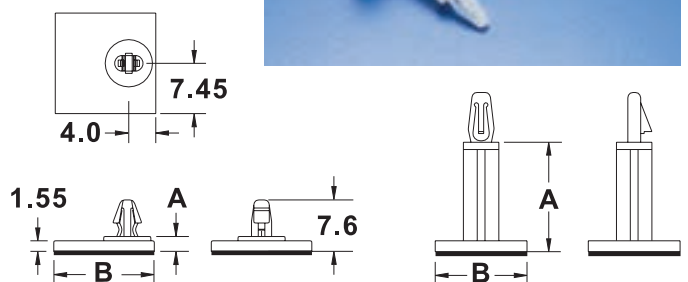


MMS-2

MMS-21




CIRCUIT BOARD TRACK

Unit: mm

Part No.	A	B	C	D	E	F	G	Packing
BT-90A	89.5	77.5	1.9	4.5	9.7	1.5	3	100pcs (1000pcs)
BT-90	89.5	64.4	1.9	4.5	9.7	1.5	3	
BT-120	119	94.5	1.9	4.5	9.5	1.5	3	
BT-140	141	115.4	1.9	4.5	9.7	1.5	3	
BT-155A	154	141	2.0	4.6	6.6	1.3	3.3	
BT-160	160.5	134.5	1.9	4.5	9.7	1.5	3	
BT-160A	163	149.5	1.9	6.5	9.5	2.2	2.3	
BT-77DBK	77	67	1.4	6.0	6.6	1.5	3	black




- BT-90A, BT-155A, BT-160A with snap in design.
- Material: UL approved NYLON 66, 94V-2.
- To be fixed by 2 sets of 3mm flat-head screw.

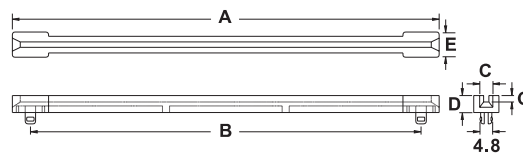

HEXAGONAL THREADED SPACER

Unit: mm

Part No.	A	B	C	D	Packing
HTS-306	5.6	6	M 3	6	100pcs (1000pcs)
HTS-308	5.6	6		8	
HTS-310	5.6	6		10	
HTS-312	5.6	6		12.7	
HTS-315	5.6	6		15	
HTS-318	5.6	6		18	
HTS-320	5.6	6		20	
HTS-322	5.6	6		22	
HTS-325	5.6	6		25	
HTS-330	5.6	6		30	
HTS-410	7	6	M 4	10.1	
HTS-413	7	6		13.0	
HTS-415	7	6		15.0	
HTS-419	7	6		19.0	
HTS-425	7	6		25.0	

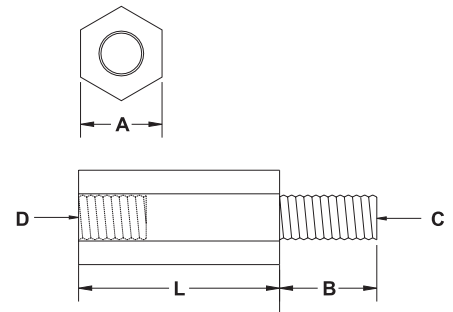


- Material: UL approved NYLON 66, 94V-2

SELF-ADHESIVE PCB SUPPORT

Unit: mm

Part No.	A	PCB		Packing
		hole	thickness	
MMR-5	4.8	3.2	1.6	100pcs
MMR-6	6.4			
MMR-8	4.9			
MMR-9	9.5			
MMR-11	11.1			
MMR-13	12.7			
MMR-14	14.3			
MMR-16	15.9			




- Material: UL approved NYLON 66, 94V-2

HEXAGONAL THREADED SPACER

Unit: mm

Part No.	A	B	C	Packing
HTP-306	6.0	5.5	M 3	100pcs (1000pcs)
HTP-308	8.0	5.5		
HTP-310	10.0	5.5		
HTP-312	12.7	5.5		
HTP-315	15.0	5.5		
HTP-318	18.0	5.5		
HTP-320	20.0	5.5		
HTP-322	22.0	5.5		
HTP-325	25.0	5.5		
HTP-330	30.0	5.5		

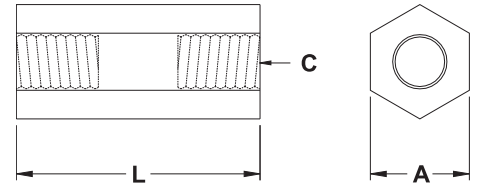


• Material: UL approved NYLON 66, 94V-2

SLIDE SECURE CIRCUIT BOARD SUPPORT

Unit: mm

Part No.	L	A	B	C	Packing
HTN-380	79	5.5	15	2.7	100pcs

• Material: UL approved NYLON 66, 94V-2




PCB SUPPORT

Unit: mm

Part No.	A	Packing
KCS-0813V0	12.5	100pcs (1000pcs)

• Material: UL approved NYLON 66, **94V-0**




PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	Packing
SPS-6	6.5	3.9	7.0	6.0	100pcs (1000pcs)

• Material: UL approved NYLON 66, 94V-2




PCB SUPPORT

Unit: mm

Part No.	A	H	C	Packing
PB-10	9.6	29.6	M4x10mm	100pcs

- Material: UL approved NYLON 66, 94V-2

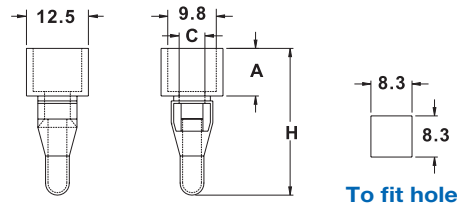


PCB SUPPORT

Unit: mm

Part No.	A	H	C	Packing
PST-18	19	25.8	#6-32UNC	100pcs

- Material: UL approved NYLON 66, 94V-2




PCB SUPPORT

Unit: mm

Part No.	A	Packing
HGS-7	7.0	100pcs
HGS-8	7.9	
HGS-11	7.0	

- Material: UL approved NYLON 66, 94V-2

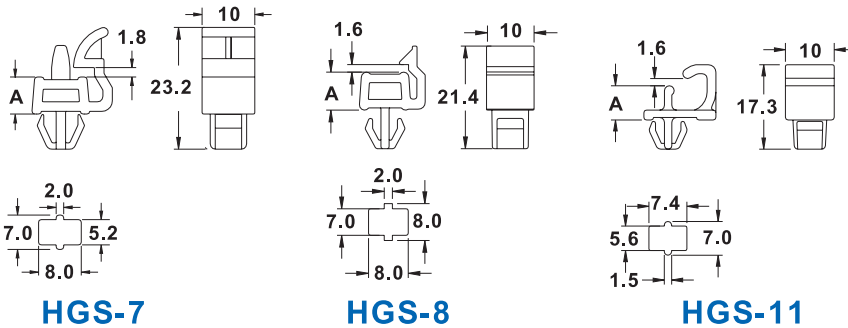


PCB SUPPORT

Unit: mm

Part No.	A	Packing
GS-10	10	100pcs (1000pcs)

• Material: UL approved NYLON 66, 94V-2


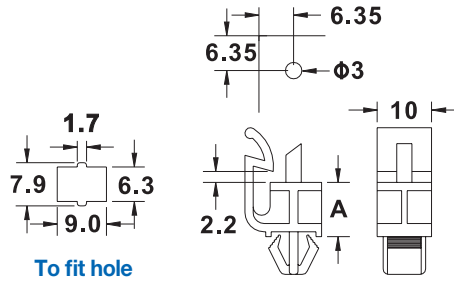


PCB SUPPORT

Unit: mm

Part No.	A	Packing
SWS-1	11.0	100pcs
SWS-2	10.0	

• Material: UL approved NYLON 66, 94V-2 ◦

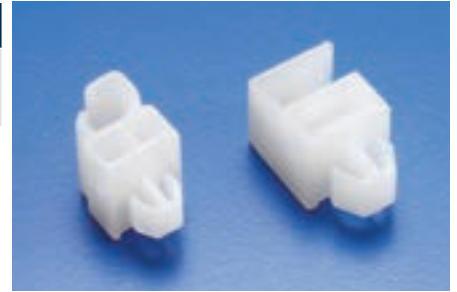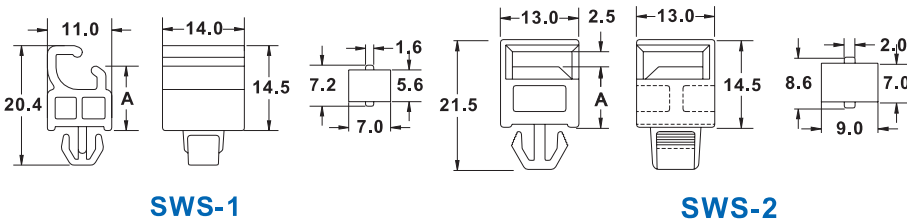


PCB SUPPORT

Unit: mm

Part No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
LCS-0610V0	9.4	4.0	2.0	4.8	2.0	100pcs(1000pcs)

• Material: UL approved NYLON 66, 94V-0

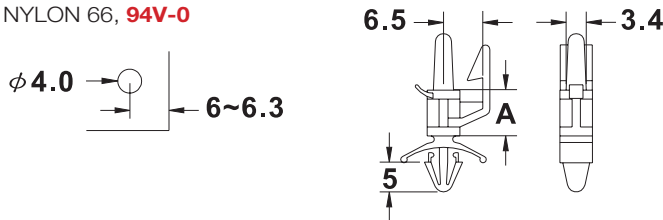


PCB SUPPORT

Unit: mm

Part No.	A	PCB		Chassis		Packing
		hole	thickness	hole	thickness	
LCS-10A	9	4.0	1.8	4.0	1.8	100pcs(1000pcs)

• Material: UL approved NYLON 66, 94V-2


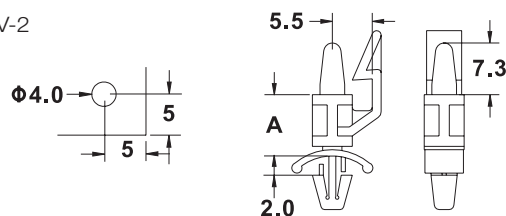


PCB SUPPORT

Unit: mm

Part No.	A	Packing
LCL-8WE6	7.9	100pcs(1000pcs)

- Material: UL approved NYLON 66, 94V-2




PCB SUPPORT

Unit: mm

Part No.	Dimension	PCB		Packing
		hole	thickness	
PCU-23	AS Figure	4.5	4.0	100pcs(1000pcs)

- Material: UL approved NYLON 66, 94V-2




SNAP RIVET

Unit: mm

Part No.	A	B	C	Packing
SR- 355K	3.0	5.5	2.5-4.0	100pcs
SR- 365K	3.0	6.5	4.0-5.0	
SR- 380K	3.0	8.0	5.5-6.5	
SR- 450K	4.0	5.0	2.2-3.5	
SR- 465K	4.0	6.5	4.0-5.0	
SR-0612K	6.2	12.3	7.0~10.0	

- Material: UL approved NYLON 66, 94V-2
- Rivet post pressure expands legs for fast and permanent fastening.

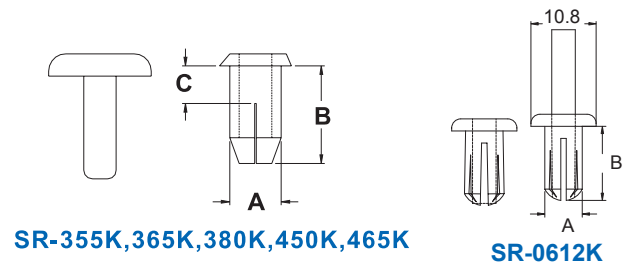


PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	E	F	G	Packing
SR-0813	10.7	7.0	5.5	7.8	15.8	25.1	15.6	100pcs
SR-0910	10.8	7.6	1.6	8.1	15.8	20.9	11.4	(1000pcs)

• Material: UL approved NYLON 66, 94V-2

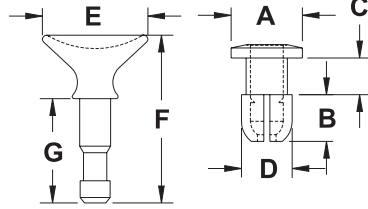


PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	E	F	Panel	Packing
SR-614	6.3	14.2	15.1	1.95	10.2	1.65	3~4.5	100pcs (1000pcs)

• Material: UL approved NYLON 66, 94V-2
• Drills holes on chassis board as shown.

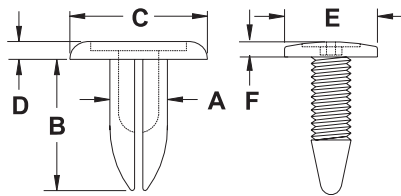


SANP RIVET

Unit: mm

Part No.	A	B	Panel	Packing
SN-0305	3.1	5	5	100pcs(1000pcs)

• Material: UL approved NYLON 66, 94V-2




PUSH RIVET

Unit: mm

Part No.	A	B	C	D	E	Packing
SR-0313(Natural)	3.2	3.2	6.3	14.9	12.9	100pcs (1000pcs)
SR-0512BK(Black)	5.1	4.7	11.2	13.6	12.5	
SR-1315(Natural)	4.6	4.6	12.9	17.0	14.9	
SR-25BK(Black)	6.6	6.6	17.85	27.2	25.2	

• Material: UL approved NYLON 66, 94V-2

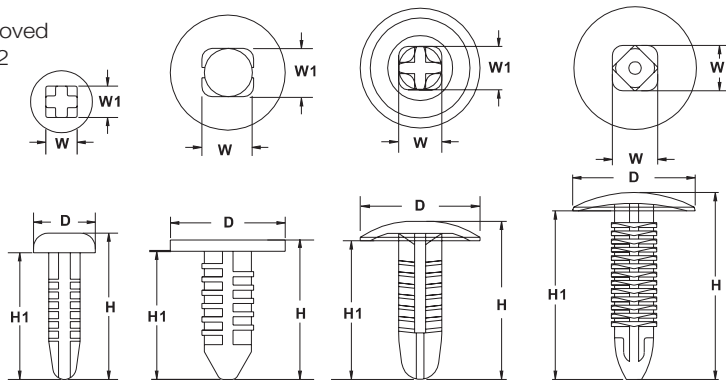

SR-0313

SR-0512BK

SR-1315

SR-25BK




PCB SUPPORT

Unit: mm

Part No.	A	B	C	D	E	F	G	Packing
SR-0809	8.5	7.1	1.9	6.3	7.1	13.6	11	100pcs (1000pcs)
SR-0810	8.5	7.1	1.9	6.3	8.1	18.4	11.5	
SR-1010	10.8	7.4	2.6	8	9.2	19.1	12.9	



• Material: UL approved NYLON 66, 94V-2

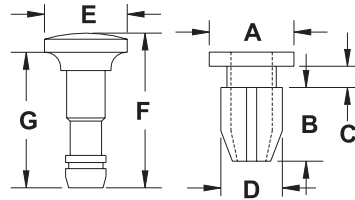


CANOE RIVET

Unit: mm

Part No.	A	B	H	Panel	Packing
SN-0309	3.8	7.4	8.7	3~6	100pcs (1000pcs)
SN-0511	4.9	9.2	11	2~5	
SN-0716	7.5	12.9	16	3~6	



• Material: UL approved NYLON 66, 94V-2

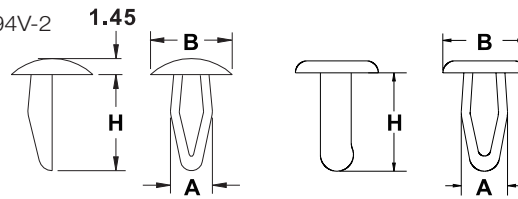

SN-0309

SN-0511, SN-0716


DOOR LOCK

Unit: mm

Part No.	W1	W2	H	Packing
DR-1	8.2	10.6	14.7	100pcs(1000pcs)



• Material: UL approved NYLON 66, 94V-2




ROUND SPACER

Unit: mm

Part No.	A	B	C	Packing
RSP-1607	19	16.5	6.9	100pcs(1000pcs)



• Material: PE




ROUND SPACER

Unit: mm

Part No.	A	B	C	Packing
RSP-0203	4.0	2.1	2.5	100pcs (1000pcs)
RSP-0508	7.5	4.6	8	
RSP-0510	10	5.4	10	

• Material: UL approved NYLON 66, 94V-2.

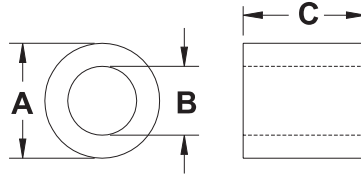


ROUND SPACER

Unit: mm

Part No.	Dimension	PCB		Packing
		hole	thickness	
PH-17	As Figure	4.0	1.6	100pcs(1000pcs)

• Material: UL approved NYLON 66, 94V-2.

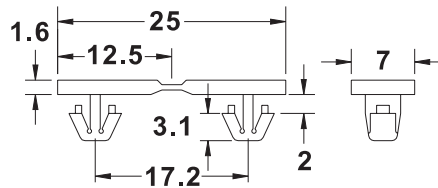

FASTENERS




LOCKING WIRE SADDLE

Unit: mm

Part No.	Dimension			Packing
	H	A	B	
KWS-0	9.2	12.7	2.8	100pcs (1000pcs)
KWS-1	14.4	17.9	8.6	
KWS-2	23.4	26.9	18.2	
KWS-2L	15.7	18.0	12.5	
KWS-3	31.3	34.8	26.2	



- Material: UL approved NYLON 66, 94V-2.
- For directing and gathering cables at low cost. Locking into 4.8mm diameter mouting hole with fingertip pressure. Self adjust to various panel thickness.

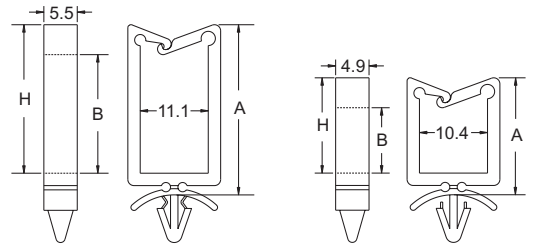


WIRE SADDLE

Unit: mm

Part No.	Dimension				Packing
	H	A	B	W	
PWS-1715	23	16.7	15	5	100pcs (1000pcs)



- Material: UL approved NYLON 66, 94V-2.




WIRE SADDLE

Unit: mm

Part No.	Dimension			Packing
	H	A	B	
PWS-2824	35.3	27.6	24	100pcs (1000pcs)



- Material: UL approved NYLON 66, 94V-2.




WIRE SADDLE

Unit: mm

Part No.	Dimension				Mounting Hole	Thickness	Packing
	H	A	B	W			
JWS-0402V0	5.1	4.5	2.8	5	3.5	0.5~1.6	100pcs (1000pcs)
JWS-0504V0	6.3	5.3	4.4	5.1	3.5	0.5~1.6	



- Material: UL approved NYLON66, **94V-0**.

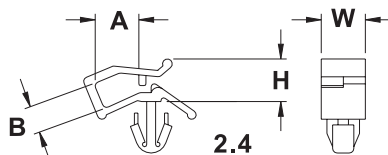


WIRE SADDLE

Unit: mm

Part No.	Dimension				Mounting Hole	Thickness	Packing
	H	A	B	W			
JWB-0706	9.7	7.7	6.4	4	3	1.6	100pcs (1000pcs)
JWS-0605V0	7.8	6.6	5.0	3.8	3.5	1.6	
JWS-0706V0	9.7	7.7	6.4	3.8	3.5	1.6	
JWS-0910	13.4	9.3	10.7	4.0	3.5	1.0	



- Material: Jws-0605, Jws-0706 UL approved NYLON66, **94V-0**.
- JWS-0910, JWB-0706 : UL approved NYLON66, 94V-2 ◦

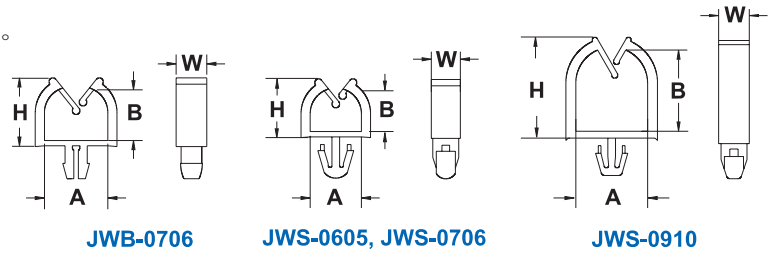


LOCKING WIRE SADDLE

Unit: mm

Part No.	Dimension	PCB		Packing
		hole	thickness	
WS-1522	As Figure	4.5	2.0	100pcs(1000pcs)


- Material: UL approved NYLON 66, 94V-2.




LOCKING WIRE SADDLE

Unit: mm

Part No.	Dimension				PCB		Packing
	H	A	B	W	hole	thickness	
KWS-0N	9.2	12.7	2.8	11.0	4.8	2.0	100pcs (1000pcs)
KWS-1N	14.4	17.9	8.6	11.0	4.8	2.0	
KWS-2N	23.4	26.9	18.2	11.0	4.8	2.0	
KWS-3N	31.3	34.8	26.2	11.0	4.8	2.0	
KWS-1114	17.8	21.2	13.7	10.7	4.8	2.4	

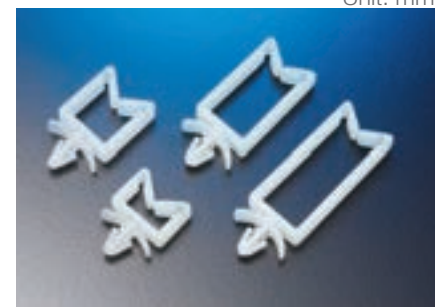

- Material: UL approved NYLON 66, 94V-2.
- For directing and gathering cables at low cost. Locking into 4.8mm hole with fingertip pressure.

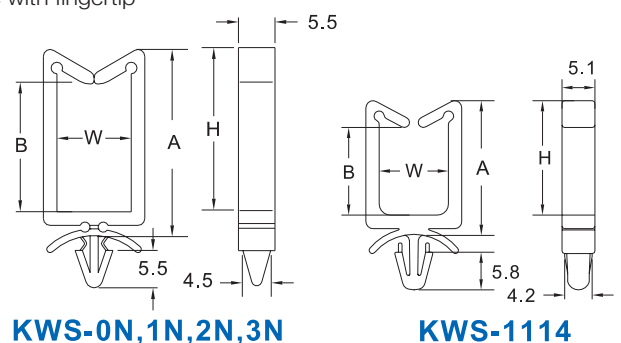


LOCKING WIRE SADDLE

Unit: mm


Part No.	Dimension			PCB		Packing
	H	A	B	hole	thickness	
KWS-0506	5.4	5.0	9.0	4.8	3.0	100pcs (1000pcs)
KWS*1106	5.4	10.5	13	4.8	1.6	
KWS-1110	9.8	10.9	14.4	As Figure	2.2	
KWS-1308	8.5	12.7	17.2	5.8	1.6	
KWS-1310	9.9	13	18.8	As Figure		
KWS-2314	13.6	22.9	28.3	4.8	3.4	




• Material: UL approved NYLON 66, 94V-2.





KWS-0506




KWS-1106




KWS-1110



KWS-1308



KWS-1310



KWS-2314


FASTENERS

EDGING WIRE SADDLE

Unit: mm

Part No.	Dimension								Packing
	A	B	C	D	L	L1	W	W1	
HL-1109	15.6	14	12.3	3	40	8.8	18.5	11.1	100pcs (1000pcs)
HL-1817	23.5	21	21	3	56.8	16.8	25.4	18	

• Material: UL approved NYLON 66, 94V-2.

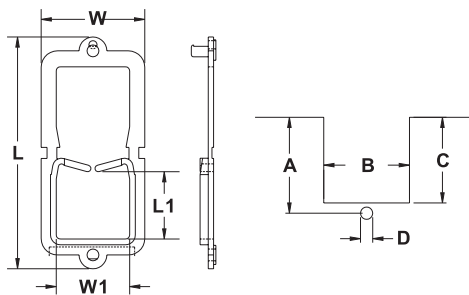


EDGING WIRE SADDLE

Unit: mm

Part No.	Dimension	Packing
ES-16	As Figure	100pcs(1000pcs)

• Material: UL approved NYLON 66, 94V-2.

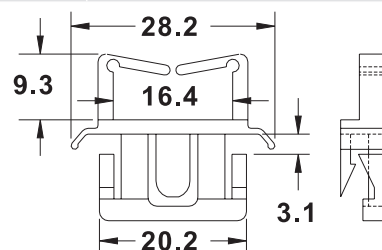


EDGING WIRE SADDLE

Unit: mm

Part No.	Dimension				Packing
	H	H1	W	W1	
ES-1207V0	12.3	7.3	19.3	11.8	100pcs (1000pcs)

- Material: UL approved NYLON66, **94V-0**.

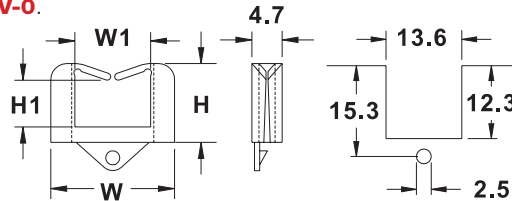


WIRE SADDLE

Unit: mm

Part No.	Dimension				Packing
	H	H1	Mounting Hole	Min Depth	
BWS-1106	13	5	7.8	8.7	100pcs (1000pcs)
BWS-1112	18.3	10.3			
BWS-1120	27.2	19.2			
BWS-1128	35.6	27.8			

- Material: UL approved NYLON 66, 94V-2




WIRE SADDLE

Unit: mm

Part No.	A	B	C	D	E	Packing
TWS-3	8.4	16.3	8.8	24.8	27	100pcs

- Material: UL approved NYLON 66, 94V-2.

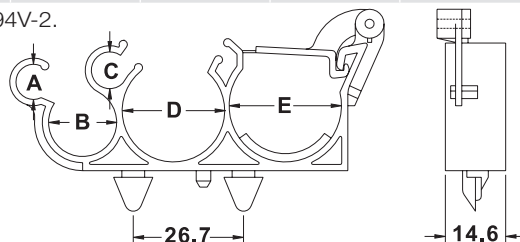


N TYPE WIRE SADDLE

Unit: mm

Part No.	A	B	C	D	Packing
PCC-1	6.3	10.6	10.7	7.5	100pcs (1000pcs)

- Material: UL approved NYLON 66, 94V-2.
- Drill hole of 4.8mm on chassis to be fixed on. Open gate to insert wire/cable, release to close.




WIRE SADDLE

Unit: mm

Part No.	A	B	PCB		Packing
			holp	Thickness	
RH-5	5.1	8	5.5	2.0	100pcs (1000pcs)
RH-6	6.2	9.5	8.0	1.8	
RH-8	7.5	11.5	6.2	2.0	
RH-9	9.6	18.0	9.5	2.0	



• Material: UL approved NYLON 66, 94V-2.

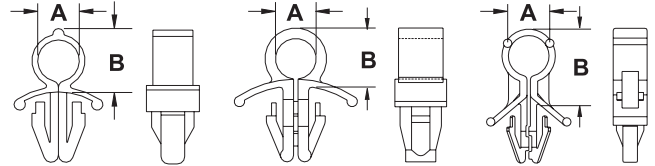

RH-5,RH-8

RH-6

RH-9


WIRE SADDLE

Unit: mm

Part No.	Diameantion A	PCB		Packing
		holp	Thickness	
RWS-6	6.2	6.0	2.0	100pcs(1000pcs)
RWS-7	7.0	7.8	2.0	



• Material: UL approved NYLON 66, 94V-2.

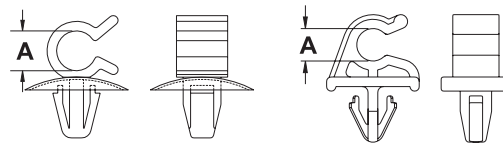

RWS-6

RWS-7


WIRE SADDLE

Unit: mm

Part No.	Diameantion A	PCB		Packing
		holp	Thickness	
LWS-5	As Figure	4.0	2.4	100pcs(1000pcs)



• Material: UL approved NYLON 66, 94V-2.

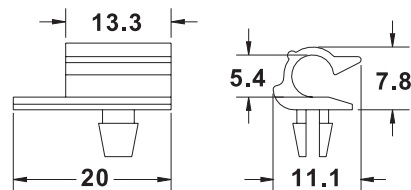


CLIP TWIST TIE

Unit: mm

Part No.	Dimension			Packing
	H1	H2	W	
CTT-17	30.5	4.2	16.7	100pcs



• Material: UL approved NYLON 66, 94V-2.

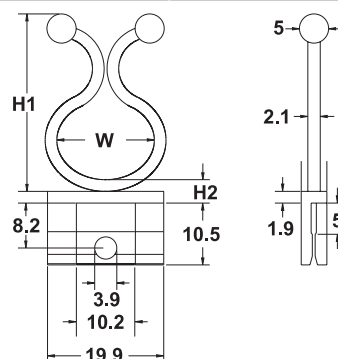


WIRE SADDLE

Unit: mm

Part No.	Dimension				PCB		Packing
	A	B	C	D	hole	Thickness	
RCS-4	4.0	5.0	2.2	2.6	4.0	2.4	100pcs

- Material: UL approved NYLON 66, 94V-2.




PURSE LOCK TWIST TIE

Unit: mm

Part No.	Dimension			Packing
	A	B	C	
PL-8	8	8	18	100pcs (1000pcs)
PL-0740	7.5	7.5	40	

- Material: UL approved NYLON 66, 94V-2 (Black)
- To hole separate running cable bundles.

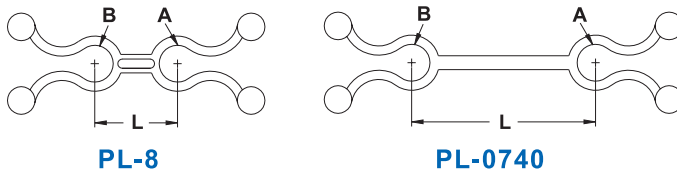


DOUBLE ROUTING CLIP

Unit: mm

Part No.	Diameantion A	PCB		Packing
		hole	Thickness	
DR-6	As Figure	3.2	2.0	100pcs(1000pcs)


- Material: UL approved NYLON 66, 94V-2.

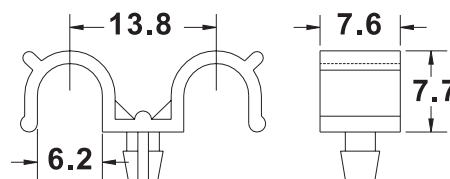


STANDOFF TWIST TIE

Unit: mm


Part No.	Dimension			Mounting Hole	Thickness	Packing
	H1	H2	W			
ST-1	19.5	31.7	6.0	4.6~4.8	1.0~2.8	100pcs (1000pcs)
ST-2	27.8	21.2	11.0	4.8~5.0	1.0~2.8	
ST-3	27.3	4.7	10.4	4.6~4.8	1.0~2.8	
ST-3B	28.0	5.0	11.0	6.2~6.6	0.5~2.0	
ST-3C	32.0	5.0	15.5	4.6~4.8	0.5~1.6	
ST-3D	36.2	5.3	18.0	4.4~4.8	1.0~2.4	
ST-4S	27.9	13.0	11.0	4.2~4.8	1.0~2.4	
ST-4	31.3	13.1	15.0	4.6~4.8	1.0~2.0	
ST-0560	20.5	60.9	5.0	4.6~5.0	1.6~3.0	
ST-0605	19.3	5.3	6.1	4.0~4.4	2.4	
ST-0701	22.0	1.3	7.0	4.6~4.8	1.0~2.8	
ST-1112	26.8	15.3	11.0	4.6~4.8	1.6~3.0	
ST-1247	27.2	50.5	11.0	4.6~4.8	1.6~3.0	
ST-1303	45.0	3.0	13.5	6.6	1.8~3.6	
ST-1602	31.7	5.1	16.0	4.4~4.6	0.5~1.6	
ST-2005	36.5	5.1	20.0	7.2~7.6	1.8~3.6	
ST-2403	44.2	3.2	23.5	4.8~5.0	0.5~2.6	

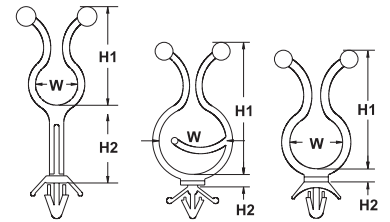

Standard Design ST-3D ST-3C

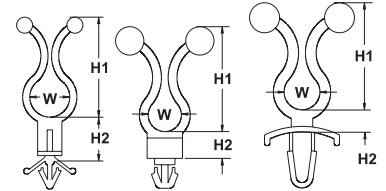

ST-4S ST-0605 ST-0701

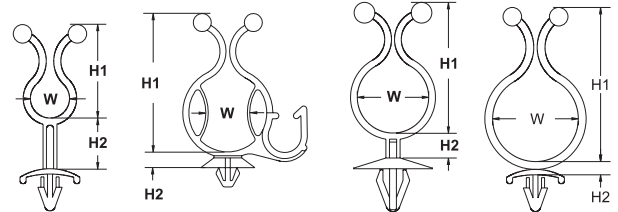

ST-1112,1247

ST-1303

ST-2005


ST-2403

- Material: UL approved NYLON 66, 94V-2
- Locking into pre-drilled hole, Assembles cables into " W " Part and locks with a twist.

TWIST TIE

Unit: mm

Part No.	Dimension			Bundle Diameter	Packing
	A	B	C		
TT-05	5.1	21.6	1.5	4.4	100PCS
TT-08	7.0	25.0	2.0	7.0	
TT-11	11.6	29.8	1.7	10.1	
TT-15	15.0	33.8	1.9	13.4	
TT-18	18.6	40.0	1.9	16.2	
TT-24	23.6	45.0	2.0	21.3	
TTU-05	5.0	22.0	1.8	4.2	
TTU-08	8.1	26.2	2.3	7.2	
TTU-11	11.3	29.7	2.3	10.0	
TTU-15	14.8	32.6	2.0	13.2	
TTU-18	18.0	38.0	2.0	16.5	
TTU-22	22.0	42.3	2.0	19.8	
TTU-28	28.0	55.1	2.0	26.7	

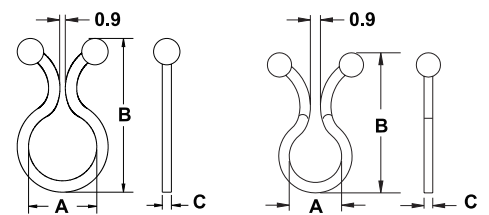

Standard Design TTU-08,11,15,28


- Material: UL approved NYLON 66, 94V-2 Colors available upon request.
- Tie-up cables at economical cost.
- Open the ties to feed cable and twist on to fix.

MOUNTING TWIST TIE

Unit: mm

Part No.	A	B	C	Bundls Diameter	Packing
TTB-08	7.9	27.5	17.4	7-10	100pcs (1000pcs)
TTB-15	14.8	35.2	22	10-15	
TTB-20	20.6	40	25.5	15-20	

- Material: UL approved NYLON 66, 94V-2 (Backed with adhesive tape)
- Peel off adhesive paper before usage and insert cables into the twist lock and general twist ties.


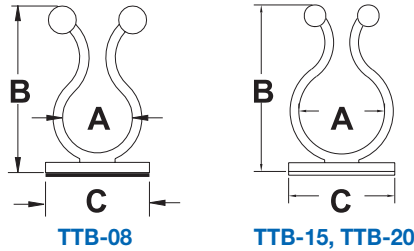


ADHESIVE WIRE SADDLE

Unit: mm

Part No.	A	B	C	D	Packing
AWS-11	11.2	11	20	19.8	100pcs (1000pcs)
AWS-9R	8.5	13.6	29.8	16	
AWS-1210	11.3	10	20.7	18.3	
AWS-0912	9	11.6	15.8	9.5	

- Material: UL approved NYLON 66, 94V-2 (Backed with adhesive tape)

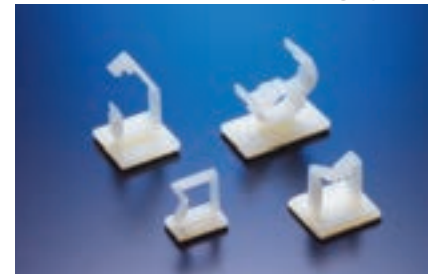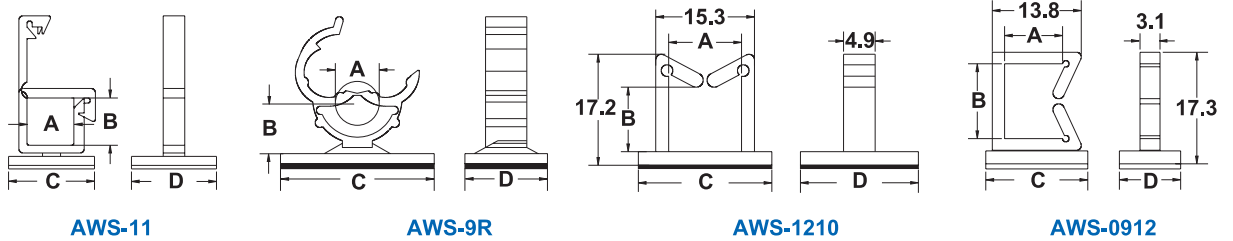


SPACERS RING

Unit: mm

Part No.	D	H1	H2	Packing
SPR-8V0	28.0	14.2	-	100pcs (1000pcs)
SPR-45V0	49.2	26.3	22.0	

- Material: UL approved NYLON66, 94V-0.


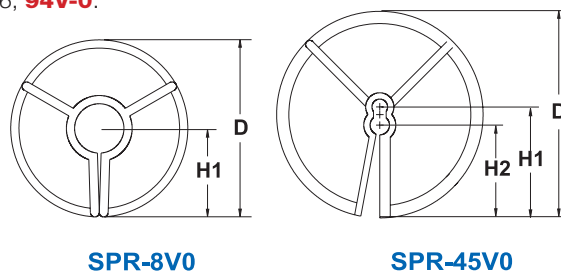


TRANSISTOR HOUSING

Unit: mm

Part No.	Dimension	Packing
TH-1V0	As Figure	100pcs(1000pcs)

- Material: UL approved NYLON66, **94V-0**.
- To protect transistors from electric short circuit and good for thermal control.

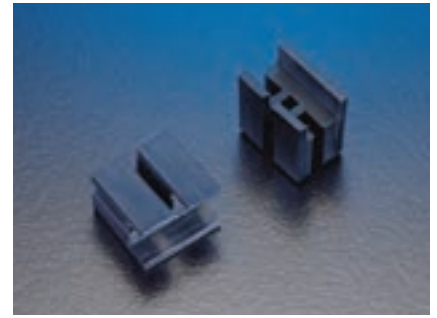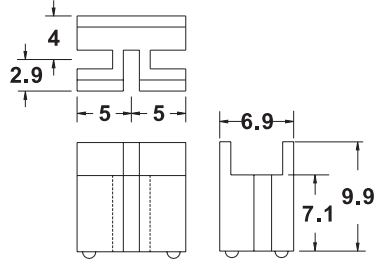


TRANSISTOR HOUSING

Unit: mm

Part No.	A	B	C	D	Packing
THR-2	5	10.1	2.8	4	100pcs(1000pcs)

- Material: UL approved NYLON 66, 94V-2





TRANSISTOR COVER

Unit: mm

Part No.	A	Packing
TH-2V0	As Figure	100pcs(1000pcs)
TH-3V0	As Figure	

- Material: UL approved NYLON 66, **94V-0**
- To protect transistors legs form short or breakage.

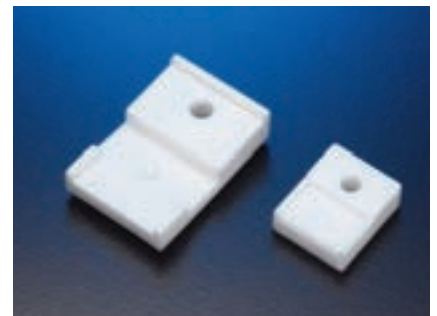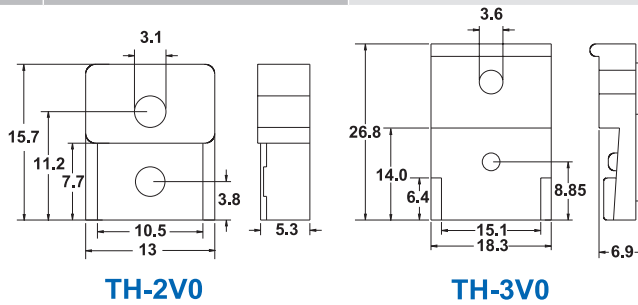


NTC THERMISTOR HOUSING

Unit: mm

Part No.	A	B	C	Packing
TRH-7V0	16.5	7.5	5.1	100pcs(1000pcs)

- Material: UL approved NYLON 66, **94V-0**

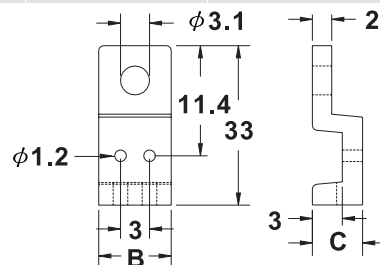


TRANSISTOR HOUSING

Unit: mm

Part No.	A	B	Packing
TR-3	2.1	1.1	100pcs(1000pcs)

• Material: UL approved NYLON 66, 94V-2

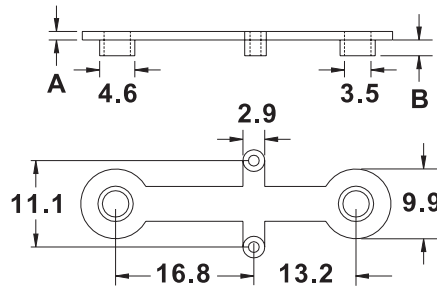


WASHER

Unit: mm

Part No.	Dimension	Packing
WR-3207	As Figure	100pcs(1000pcs)

• Material: UL approved NYLON 66, 94V-2





WASHER

Unit: mm

Part No.	A	B	C	Packing
WR-0503	4.5	2.5	0.8	100pcs (1000pcs)
WR-0603	6	3	0.8	
WR-1206	12	6	1.5	
WR-1208	12	8	1.5	
WR-2011RU	20	10.6	2.0	

• Material: UL approved NYLON 66, 94V-2

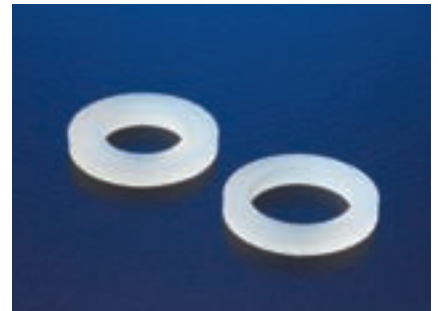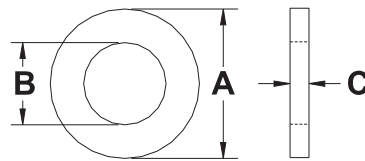


HEADBOARD WASHER

Unit: mm

Part No.	A	B	C	Packing
HBW-1808	18	8.6	11.7	100pcs (1000pcs)

• Material: PE





ROUND WASHER

Unit: mm

Part No.	A	B	C	D	E	Packing
RW-45	4.5	4	8	6.5	3.1	100pcs (1000pcs)

• Material: UL approved NYLON 66, 94V-2.

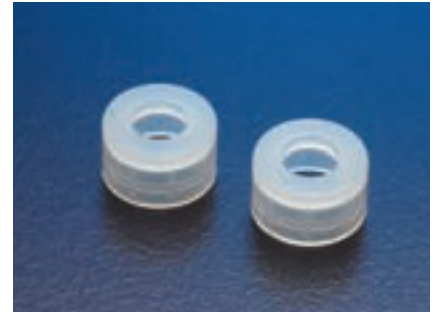


CONOID WASHER

Unit: mm

Part No.	A	B	C	D	E	Packing
CDW-12	12.2	3.3	6.9	8.3	10.7	100pcs (1000pcs)

• Material: UL approved NYLON 66, 94V-2.

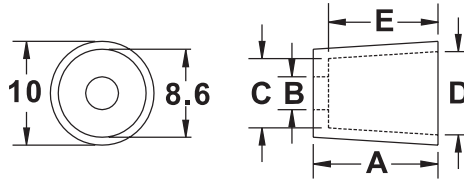


TRANSISTOR WASHER

Unit: mm

Part No.	A	B	C	D	E	Packing
TW-63A	6.0	8.1	0.5	3.5	2.8	100pcs (1000pcs)
TW-6.B	6.0	1.4	1.2	3.5	2.9	
TW-63C	6.0	2.3	1.7	3.5	2.9	
TW-63D	6.0	3.2	1.9	3.5	2.9	
TW-63E	6.1	2.6	2.0	3.5	2.9	
TW-63F	6.3	2	1.3	3.4	2.9	
TW-73A	6.6	1.8	3	4.2	3.2	
TW-73B	6.9	2.5	1.3	3.6	2.9	
TW-83A	7.7	3.7	1.3	5.8	3.1	
TW-83B	7.8	5.6	1.2	3.6	2.9	
TW-83C	7.8	0.9	2.0	4.3	3.2	
TW-83D	8.0	2.3	1.3	3.5	2.9	
TW-83E	7.8	1.2	3.7	5.9	3.2	
TW-123ABK	12.0	3.0	0.5	5.9	3.2	
TW-133A	12.7	1.7	1.5	7.9	3.7	
TW-163A	16	1.5	2.0	6.0	3.2	
TW-189A	18	1.5	3.3	12.4	9.3	

• Material: UL approved NYLON 66, 94V-2.





TRANSISTOR WASHER

Unit: mm

Part No.	A	B	Packing
TRW-3	5.7	3	100pcs(1000pcs)
TRW-5	8.9	4.6	

• Material: UL approved NYLON 66, 94V-2.

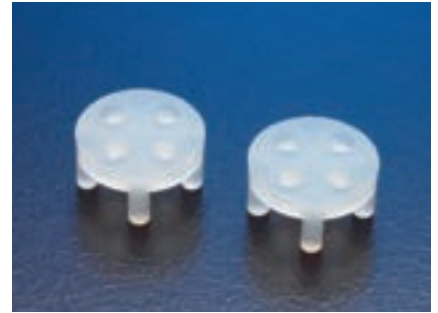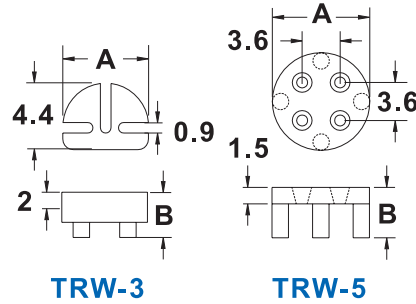


LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	B	C	D	E	F	
LE-3	3.1	3.6	1	1.2	7.2	3.6	100pcs (1000pcs)
LE-6	6	3.6	1	1.2	7.1	3.9	
LE-13	12.9	4	1	1.4	6	3.9	

• Material: UL approved NYLON 66, 94V-2.

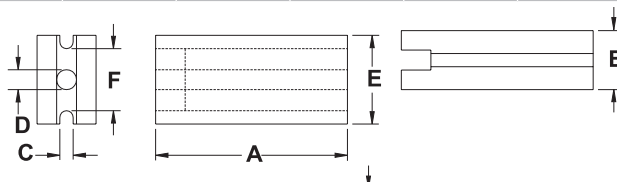


LED HOLDER

Unit: mm

Part No.	A	Packing
LK-5	5	100pcs (1000pcs)
LK-18	18	

• Material: UL approved NYLON 66, 94V-2.


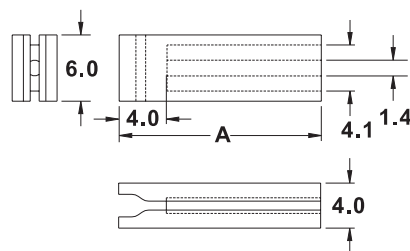


LED HOLDER

Unit: mm

Part No.	A	B	Packing
LX-3	3	5	100pcs (1000pcs)
LX-6	6	5	
LX-12	12	5	

• Material: UL approved NYLON 66 94V-2.

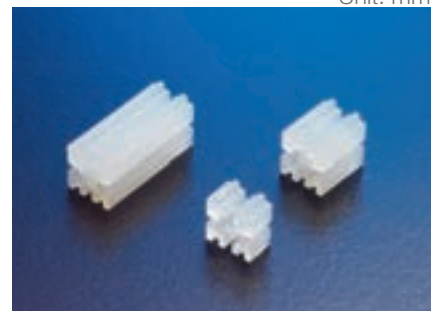


LED HOLDER

Unit: mm

Part No.	A	B	Packing
LQT-3	3.1	6.6	100pcs(1000pcs)

• Material: UL approved NYLON 66, 94V-2





LED HOLDER

Unit: mm

Part No.	A	Packing
LQ-2	2.6	100pcs(1000pcs)

• Material: UL approved NYLON 66 94V-2

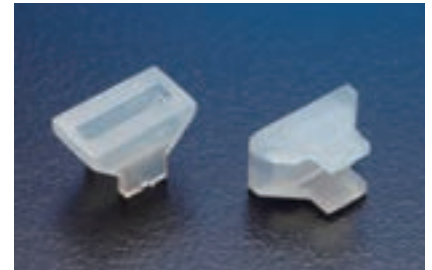


LED HOLDER

Unit: mm

Part No.	Dimension			Packing
	A	B	C	
LDT-17	17.2	4.7	5.7	100pcs (1000pcs)

• Material: UL approved NYLON 66, 94V-2

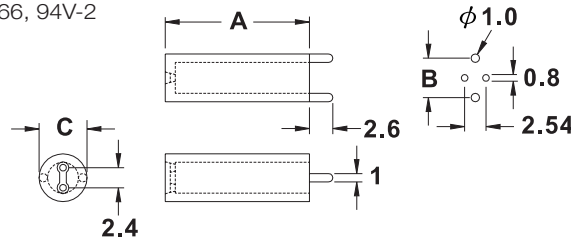


LED HOLDER

Unit: mm

Part No.	Dimension		Packing
	A	LED	
LD3-6	6.1	3Ø 2PIN	100pcs (1000pcs)
LD3-9	9		
LD3-16	16		
LD3-19	19		

• Material: UL approved NYLON 66, 94V-2


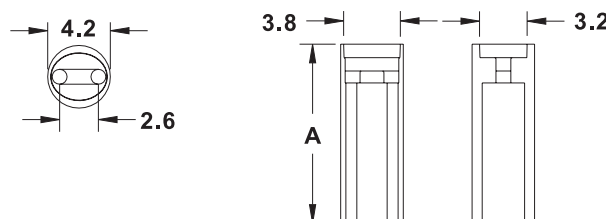


LED HOLDER

Unit: mm

Part No.	A	Packing
LY-14	14.1	100pcs(1000pcs)

• Material: UL approved NYLON 66 94V-2

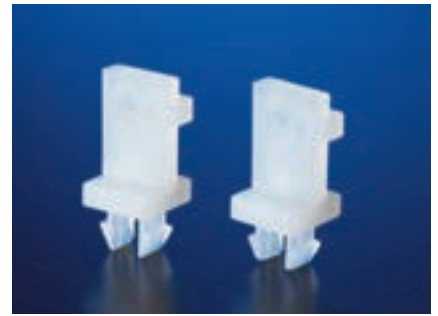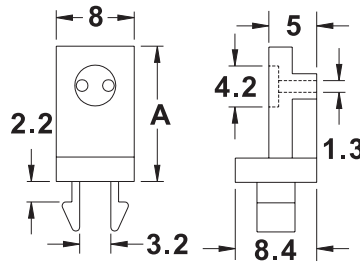


LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LG3-12	12	7.1	3.6	7.5	15.8	5Ø3PIN	100pcs
LG3-18	17.5	7.1	3.7	7.5	21.6	5Ø3PIN	(1000pcs)

• Material: UL approved NYLON 66 94V-2

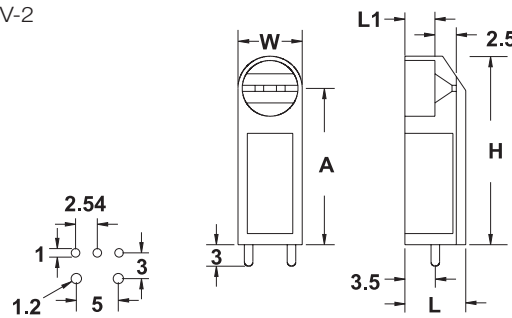


LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LG-8	7.8	5.6	3.1	5.5	10.8	3Ø2PIN	100pcs

• Material: UL approved NYLON 66 94V-2

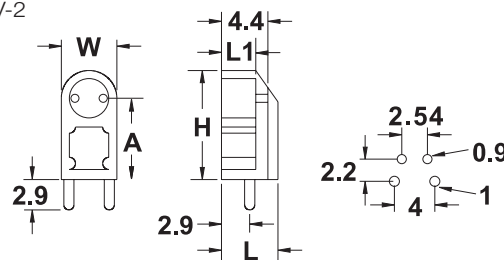


LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LH-4	4.5	5.6	=	5.4	7.2	3Ø2PIN	100pcs

• Material: UL approved NYLON 66 94V-2

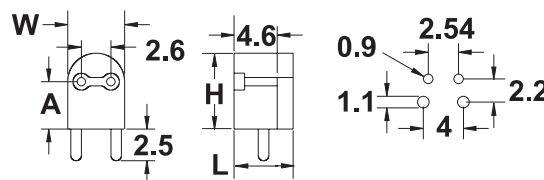


LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LHN-10	10	5.6	=	5.5	12.8	5Ø2PIN	100pcs

• Material: UL approved NYLON 66 94V-2




LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
PLU-9	9	10.2	3.5	8	13.1	5Ø3PIN	100pcs

• Material: UL approved NYLON 66 94V-2

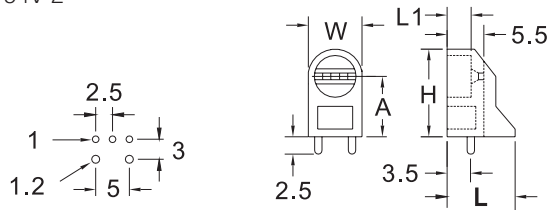


LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
LHK-3	2.7	6	1	7.6	6	5Ø3PIN	100pcs

• Material: UL approved NYLON 66 94V-2

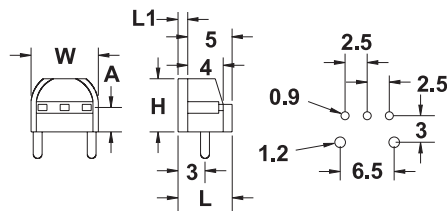


LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
PLK-5	4.7	8.2	6.0	7.6	9	5Ø3PIN	100pcs

• Material: UL approved NYLON 66 94V-2

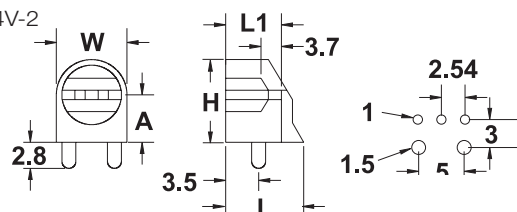


LED HOLDER

Unit: mm

Part No.	Dimension						Packing
	A	L	L1	W	H	LED	
PLM-16	16	6.7	3.4	5.1	18.7	3Ø2PIN	100pcs

• Material: UL approved NYLON 66 94V-2


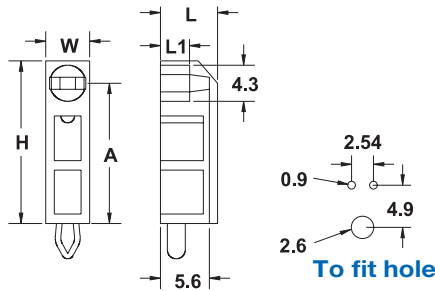


LED HOLDER

Unit: mm

Part No.	Dimension					Packing
	A	L	W	H	LED	
PLX-18	18.2	7.7	9.6	21.6	5Ø2PIN	100pcs
PLW-18	18.2	9.7	9	21.6	5Ø3PIN	(1000pcs)

• Material: UL approved NYLON 66 94V-2

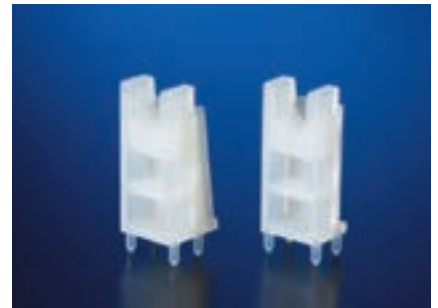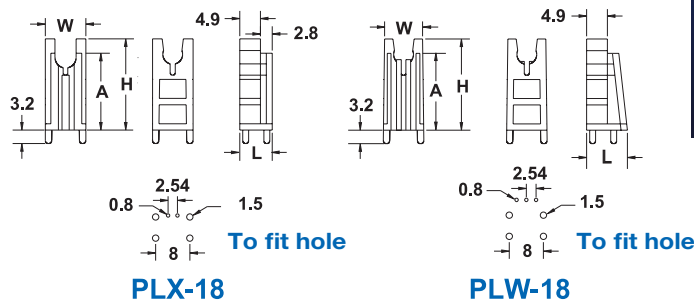


LED HOLDER

Unit: mm

Part No.	Dimension									Packing
	A	A1	L	L1	W	H	P1	P2	LED	
PLD1-3A	5.05	=	6.5	2	4.7	7.5	4.65	=	3Ø2PIN	100pcs (1000pcs)
PLD2-3A	2.8	5	9.2	2.8	4.5	10	4.9	7.2	3Ø2PIN	
PLD2-3B	2.6	5	8.2	2.6	4.8	9.9	4.8	7.2	3Ø2PIN	
PLD2-5C	2.95	6.3	11.2	4.5	5.9	12.2	5.6	7.7	5Ø2PIN	
PLD4-3A	2.6	5	10.2	1	10.2	10.2	6.4	9.2	3Ø2PIN	
PLD4-3B	5.6	=	20.4	4.4	22.7	9.0	15	=	3Ø2PIN	

• Material: UL approved NYLON 66, 94V-2


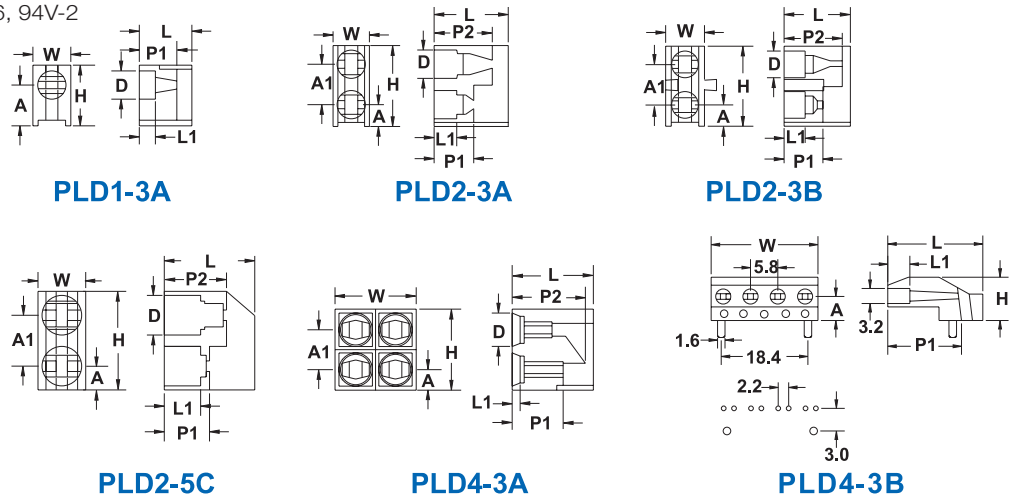


LED HOLDER

Unit: mm

Part No.	Dimension									Packing
	A	A1	L	L1	W	H	P1	P2	LED	
PLT-4	3.7	=	6.7	=	6.7	7	3.1	=	5Ø2PIN	100pcs

- Material: UL approved NYLON 66, 94V-2

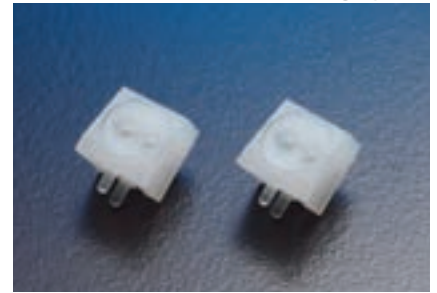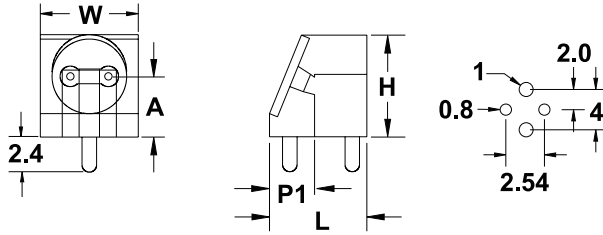


LED HOLDER

Unit: mm

Part No.	Dimension									Packing
	A	A1	L	L1	W	H	P1	P2	LED	
PLR-4	4	=	11	1.2	7.7	8	5.8	8	5Ø3PIN	100pcs

- Material: UL approved NYLON 66, 94V-2

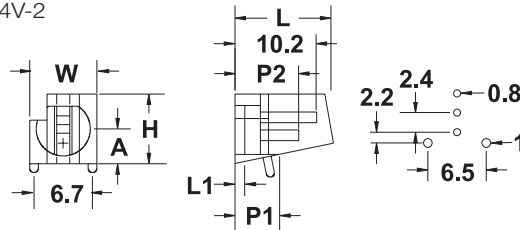


LED HOLDER

Unit: mm

Part No.	Dimension						LED	Packing
	L	L1	D1	D2	T			
PCL-5A	7.2	4.5	6.2	7.8	1.5	5Ø	100pcs	
PCL-3H	5.2	3.2	4.8	5.5	1.2	3Ø	(1000pcs)	

- Material: UL approved NYLON 66 94V-2

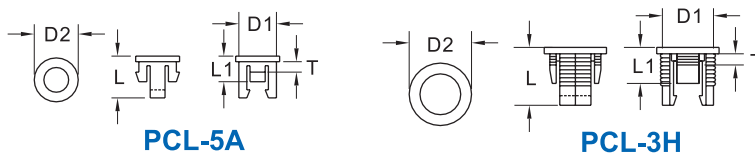


CAPACITOR HOUSING

Unit: mm



Part No.	Dimension			Packing
	A	B	C	
CAP-10	12.5	10.4	9.5	100pcs(1000pcs)

- Material: UL approved NYLON 66, 94V-2






PLASTIC FASTENERS


Unit: mm

	Part No.	A	B	C	D	Pitch	Packing
SCREW 	PF-306K	M3	6	2.5	7	0.5	1000pcs
	PF-308K		8				
	PF-310K		10				
	PF-312K		12				
	PF-408K	M4	8	2.6	5	0.7	
	PF-410K		10				
	PF-412K		12				
	PF-414K		14				
	PF-420NK	M5	20	3.5	8.7	0.8	
	PF-425NK		25				
	PF-520NK		20				
	PF-530NK		30				
	PF-540NK	M6	40	4	10	1	
	PF-620NK		20				
PF-630NK	30						
PF-640NK	40						
NUT 	PN-3K	M3	6.4	2.4	5.6	0.5	1000pcs
	PN-4K	M4	8.1	3.2	7	0.7	
	PN-4NK	M4	8.1	3.2	7	0.7	
	PN-5NK	M5	9.2	4	8	0.8	
	PN-6NK	M6	11.5	5	10	1	

- Material: PC(Poly carbonate)-Transparent, NYLON 66
- For better insulation light weight.No rust.
- Used extensively as metal screw but where insulation is needed.Good for computer or electronics equipment fixation.
- For NYLON 66, Add "N" to Item NO.



	Part No.	A	B	C	D	Pitch	Packing
SCREW 	PF-820N	M8	20	5.4	11.7	1.25	1000pcs
	PF-830N		30				
	PF-840N		40				
	PF-1030N	M10	30	5.5	13.5	1.5	
	PF-1040N		40	13.6			
NUT 	PN-8N	M8	14.5	6.4	12.8	1.25	
	PN-10N	M10	19.2	8	16.7	1.5	



PF-TYPE

PN-TYPE

- Material: NYLON 66, 94V-2
- For better insulation light weight.No rust.
- Used extensively as metal screw but where insulation is needed.Good for computer or electronics equipment fixation.

MODULAR PLUG & PLUG COVER

Unit: mm

Part No.	Color	Packing
RJ45-8A2	MODULAR PLUG(STRAINED WIRE)	100pcs
RJ45-8A3	MODULAR PLUG(STRAINED WIRE OR SOLID WIRE)	
RJ45-60GY	GRAY PLUG COVER	
RJ45-60R	RED PLUG COVER	
RJ45-60Y	YELLOW PLUG COVER	
RJ45-60BL	BLUE PLUG COVER	



U CONNECTOR

Unit: mm

Part No.	mm	AWG	Packing
UY	1.52	22~26	100pcs

- Specialty: Conduct the circuit without peeling the wire ; also achieve at least UL Category 5's transmission result.




BANDEX Cable Accessories

COPPER LUGS AND TERMINALS



BANDEX NOW OFFERS YOU FREEDOM OF CHOICE


- A** Non-insulated terminals (Non Ins Style)
- B** Insulated terminayls with P.V.C. (vinyl) (Pre-Ins Style)
- C** Insulated terminals with extra copper sleeve (Double Grip Style)

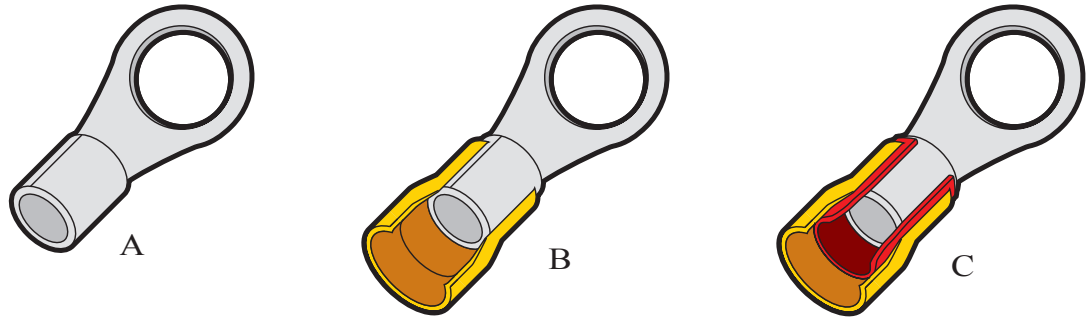

ALLIGATOR CLIPS

Unit: mm

Part No.		Length	Ampere	Colour	Qty
Clip & Tubing	Tubing only				
AC-1	BC-1	35	2	Red, Blk	100
AC-2	BC-2	42	3	Red, Blk	100
AC-3	BC-3	50	5	Red, Blk	100
AC-4	BC-4	68	10	Red, Blk	100
AC-5	BC-4	80	20	Red, Blk	100

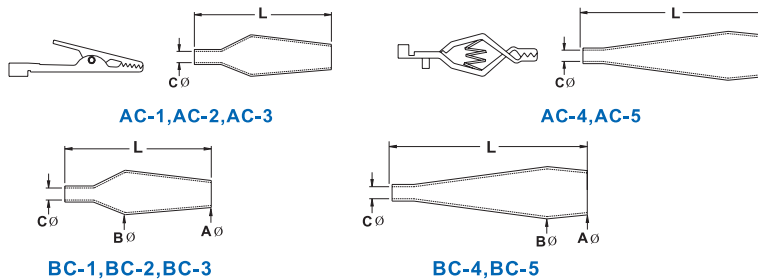

COPPER LUGS AND TERMINALS

BLADE TERMINALS-FLAT

Unit: mm

Flat Blades	Part No.			Blade		Wire Size		Qty
	Non Ins	Pre Ins	Double Grip	Width	Length	AWG	mm ²	
FB1-10N	FB1-10	FB1-10H		3	10	22-16	1.25	100
FB2-9N	FB2-9	FB2-9H		2.8	9	16-14	2	100
FB5-10N	FB5-10	FB5-10H		2.8	10	12-10	5.5	100



BLADE TERMINALS-LIP

Unit: mm

Non Ins	Lip Blades						
	Part No.		Blade		Wire Size		Qty
	Pre Ins	Double Grip	Width	Length	AWG	mm ²	
LB1-3N	LB1-3	LB1-3H	3	26.8	22-16	1.25	100
LB1-4.6N	LB1-4.6	LB1-4.6H	4.6	26.8	22-16	1.25	100
LB2-3N	LB2-3	LB2-3H	3	26.8	16-14	2	100
LB-4.6	LB2-4.6	LB2-4.6H	4.6	26.8	16-14	2	100
LB5-3N	LB5-3	LB5-3H	3	29.3	12-10	5.5	100
LB5-4.6N	LB5-4.6	LB5-4.6H	4.6	29.3	12-10	5.5	100



BULLET TERMINALS-MALE

Unit: mm

Male Bullets					
Pre Ins	Part No.	Blade	Wire Size		Qty
	Double Grip	MM	AWG	mm ²	
F1.25B	F1.25BH	4	22-16	0.5-1.5	100
F 2B	F2BH	5	16-14	1.5-2.5	
F 2BS	F2BSH	4	16-14	1.5-2.5	
F 5.5B	F5.5BH	5	12-10	4-6	



BULLET TERMINALS-FEMALE

Unit: mm

Female Bullets					
Pre Ins	Part No.	Blade	Wire Size		Qty
	Double Grip	MM	AWG	mm ²	
F1.25A	F1.25AH	4	22-16	0.5/0.75/1.0	100
F 2A	F2AH	5	16-14	1.5-2.5	
F 2AS	F2ASH	4	16-14	1.5-2.5	
F 5.5A	F5.5AH	5	12-10	4-6	



BUTT CONNECTORS

Unit: mm


Part No.		Wire Size		Qty
Non Ins	Pre Ins	AWG	mm ²	
B 1.25	BF1.25S	22-16	0.5-1.5	100
B 2	BF2S	16-14	1.5-2.5	
B 5.5	BF5.5S	12-10	4-6	



CLOSED END CONNECTORS

Unit: mm

- Material: UL approved NYLON 66, 94V-2
- Nylon insulated close-end wire connector
- To apply, insert pre-stripped wires into connector tube and crimp it with crimping tool to hold wires firmly even in vibration.



Part No.	L1	L2	Ø1	Ø2	Nominal Sectional	AWG	Suitable Wires	Packing
					Area mm ²		Strang mm ² d	
CE-1	7.5	20.0	2.4	7.8	1.25	22-16	0.5-1.75	100pcs (1000pcs)
CE-2	7.5	20.0	3.0	7.8	2	16-14	1.0-3.0	100pcs (1000pcs)
CE-5	8.5	25.3	3.8	10.5	5.5	12-10	2.5-6.0	
CE-8	8.5	27.8	4.7	12.0	8	8	4.0-9.0	

AWG	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
mm ²	33.4	20.8	13.2	8.4	5.3	3.3	2.1	1.3	0.83	0.52	0.33	0.21	0.13	0.08	0.05	0.03

CORD ENDS

Unit: mm

Non Ins	Part No.		Wire Size		Qty
	Pre Ins	Twin	AWG	mm ²	
EN-0506	E-0508		#22	0.5	100
EN-7506	E-7508	EN 75	#20	0.75	100
EN-1006	E-1008	EN-10	#18	1	100
EN-1507	E-1508	EN-15	#16	1.5	100
EN-2507	E-2508	EN-25	#14	2.5	100
EN-4009	E-4009		#12	4	100
EN-6010	E-6012		#10	6	100
EN-1012	E-1012		#7	10	100
EN-1612	E-1612		#5	16	100
	E-2516		#4	25	100
	E-3516		#2	35	100
	E-5020		#1	50	100
	E-7021			70	50
	E-9525			95	25
	E-12027			120	25
	E-15032			150	25



PIN TERMINALS

Unit: mm

Non Ins	Part No.		Wire Size		Qty
	Pre Ins	Double Grip	AWG	mm ²	
PIN 1.25	PIN 1.25 AF	PIN 1.25 AFH	22-16	0.5-1.25	100
PIN 2	PIN 2 AF	PIN 2 AFH	16-14	1.5-2.5	100
PIN 5.5	PIN 5.5 AF	PIN 5.5 AFH	12-10	4-6	100



FEMALE QUICK CONNECTORS

Unit: mm

Female QC's					
Part No.		Tab Size	Wire Size		Qty
Pre Ins	Double Grip	MM	AWG	mm ²	
LV1.25-3A	LV1.25-3AH	2.8	22-16	0.5-1.5	100
LV1.25-5A	LV1.25-5AH	4.8	22-16	0.5-1.5	100
LV1.25-7A	LV1.25-7AH	6.3	22-16	0.5-1.5	100
LV2-3A	LV2-3AH	2.8	16-14	1.5-2.5	100
LV2-5A	LV2-5AH	4.8	16-14	1.5-2.5	100
LV2-7A	LV2-7AH	6.3	16-14	1.5-2.5	100
LV5.5-7A	LV5.5-7AH	6.3	12-10	4-6	100



FULLY INSULATED FEMALE QUICK CONNECTORS

Unit: mm

Fully Insulated QC's					
Part No.		Tab Size	Wire Size		Qty
Pre Ins	Double Grip	MM	AWG	mm ²	
PV1.25-3A	PV1.25-3AH	2.8	22-16	0.5-1.5	100
PV1.25-5A	PV1.25-5AH	4.8	22-16	0.5-1.5	100
PV1.25-7A	PV1.25-7AH	6.3	22-16	0.5-1.5	100
PV2-3A	PV2-3AH	2.8	16-14	1.5-2.5	100
PV2-5A	PV2-5AH	4.8	16-14	1.5-2.5	100
PV2-7A	PV2-7AH	6.3	16-14	1.5-2.5	100
PV5.5-7A	PV5.5-7AH	6.3	12-10	4-6	100



- All sizes in mm unless otherwise stated

PIGGY BACK QUICK CONNECTS

Unit: mm

Fully Insulated QC's					
Part No.		Tab Size	Wire Size		Qty
Pre Ins	Double Grip	MM	AWG	mm ²	
MA1.25-7A	MA1.25-7AH	6.3	22-18	0.5-1.5	100
MA2-7A	MA2-7AH	6.3	16-14	1.5-2.5	100
MA5.5-7A	MA5.5-7AH	6.3	12-10	4-6	100




- All sizes in mm unless otherwise stated

MALE QUICK CONNECTS

Unit: mm

Male QC's					
Part No.		Tab Size	Wire Size		Qty
Pre Ins	Double Grip	MM	AWG	mm ²	
LV1.25-7B	LV1.25-7BH	6.3	22-18	0.5-1.5	100
LV2-7B	LV2-7BH	6.3	16-14	1.5-2.5	100
LV5.5-7B	LV5.5-7BH	6.3	12-10	4-6	100

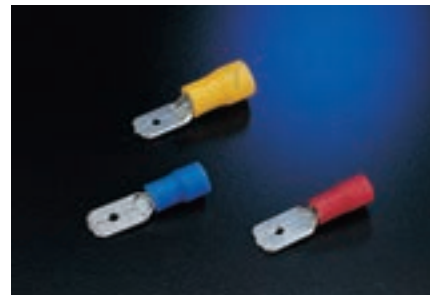

- All sizes in mm unless otherwise stated

RING TERMINALS

Unit: mm

Part No.			Stud Size	Wire Size		Qty
Non Ins	Pre Ins	Double Grip		AWG	mm ²	
R 0.5-2	RF 0.5-2	RF 0.5-2H	2.2	26-22	0.36	100
R 0.5-3	RF 0.5-3	RF 0.5-3H	3.2	26-22	0.36	
R 0.5-4	RF 0.5-4	RF 0.5-4H	4.3	26-22	0.36	
R 0.5-5	RF 0.5-5	RF 0.5-5H	5.3	26-22	0.36	
R 1.25-3	RF 1.25-3	RF 1.25-3H	3.7	22-18	0.5-1.5	
R 1.25-4	RF 1.25-4	RF 1.25-4H	4.3	22-18	0.5-1.5	
R 1.25-5	RF 1.25-5	RF 1.25-5H	5.3	22-18	0.5-1.5	
R 1.25-6	RF 1.25-6	RF 1.25-6H	6.4	22-18	0.5-1.5	
R 1.25-8	RF 1.25-8	RF 1.25-8H	8.4	22-18	0.5-1.5	
R 1.25-10	RF 1.25-10	RF 1.25-10H	10.5	22-18	0.5-1.5	
R 2-3	RF 2-3	RF 2-3H	3.7	16-14	1.5-2.5	
R 2-4	RF 2-4	RF 2-4H	4.3	16-14	1.5-2.5	
R 2-5	RF 2-5	RF 2-5H	5.3	16-14	1.5-2.5	
R 2-6	RF 2-6	RF 2-6H	6.4	16-14	1.5-2.5	
R 2-8	RF 2-8	RF 2-8H	8.4	16-14	1.5-2.5	
R 2-10	RF 2-10	RF 2-10H	10.5	16-14	1.5-2.5	
R 2-12	RF 2-12	RF 2-12H	13	16-14	1.5-2.5	
R 2-14	RF 2-14	RF 2-14H	15	16-14	1.5-2.5	
R 2-16	RF 2-16	RF 2-16H	17	16-14	1.5-2.5	
R 2-20	RF 2-20	RF 2-20H	21	16-14	1.5-2.5	
R 3.5-4	RF 3.5-4	RF 3.5-4H	4.3	14-12	2.5-4	
R 3.5-5	RF 3.5-5	RF 3.5-5H	5.3	14-12	2.5-4	
R 3.5-6	RF 3.5-6	RF 3.5-6H	6.4	14-12	2.5-4	
R 3.5-8	RF 3.5-8	RF 3.5-8H	8.4	14-12	2.5-4	
R 3.5-10	RF 3.5-10	RF 3.5-10H	10.5	14-12	2.5-4	
R 5.5-3	RF 5.5-3	RF 5.5-3H	3.7	12-10	4-6	
R 5.5-4	RF 5.5-4	RF 5.5-4H	4.3	12-10	4-6	
R 5.5-5	RF 5.5-5	RF 5.5-5H	5.3	12-10	4-6	
R 5.5-6	RF 5.5-6	RF 5.5-6H	6.4	12-10	4-6	
R 5.5-8	RF 5.5-8	RF 5.5-8H	8.4	12-10	4-6	
R 5.5-10	RF 5.5-10	RF 5.5-10H	10.5	12-10	4-6	
R 5.5-12	RF 5.5-12	RF 5.5-12H	13	12-10	4-6	
R 5.5-14	RF 5.5-14	RF 5.5-14H	15	12-10	4-6	
R 5.5-16	RF 5.5-16	RF 5.5-16H	17	12-10	4-6	
R 5.5-20	RF 5.5-20	RF 5.5-20H	21	12-10	4-6	



• All sizes in mm unless otherwise stated

R-TYPE TERMINALS

Unit: mm

• All sizes in mm unless otherwise stated



Part No.	Stud	AWG	DIN mm ²	Qty	Part No.	Stud	AWG	DIN mm ²	Qty in		
	Size			In box		Size			Box		
R 8-4NK	4.3	8	10	100	R 22-6	6.4	4	25	300		
R 8-5NK	5.3				R 22-8	8.4					
R 8-4	4.3				R 22-10S	10.5					
R 8-5	5.3				R 22-10	10.5					
R 8-5S	5.3				R 22-11	11.5			200		
R 8-5L	5.3				R 22-12	13					
R 8-6	6.4				R 22-14	15					
R 8-6L	6.4				R 22-16	17					
R 8-8	8.4				R 22-18	19					
R 8-10	10.5				R 22-20	21					
R 8-12	13				R 38-6S	6.4			2	35	100
R 8-14	15				R 38-6	6.4					
R 8-16	17				R 38-8S	8.4					
R 8-20	21				R 38-8	8.4					
R 14-4NK	4.3	6	16	100	R 38-10S	10.5					
R 14-5NK	5.3				R 38-10	10.5					
R 14-4	4.3				R 38-11	11.5					
R 14-5	5.3				R 38-12	13					
R 14-6	6.4				R 38-14	15					
R 14-6L	6.4				R 38-16	17					
R 14-8	8.4				R 38-18	19					
R 14-10	10.5				R 38-20	21					
R 14-11	11.5				R 60-6	6.4	1/10	50			
R 14-12	13				R 60-8	8.4					
R 14-14	15				R 60-10	10.5					
R 14-16	17				R 60-11	11.5					
R 14-18	19				R 60-12	13					
R 14-20	21				R 60-14	15					
R 22-5S	5.3	4	25	300	R 60-16	17					
R 22-6S	6.4				R 60-18	19					
R 22-5	5.3				R 60-20	21					

SPADE TERMINALS

Unit: mm

Part No.			Stud Size	Wire Size		Qty
Non Ins	Pre Ins	Double Grip		AWG	mm ²	
Y 1.25-3	YF 1.25-3	YF 1.25-3H	3.7	22-18	0.5-1.5	100
Y 1.25-4	YF 1.25-4	YF 1.25-4H	4.3	22-18	0.5-1.5	
Y 1.25-5	YF 1.25-5	YF 1.25-5H	5.3	22-18	0.5-1.5	
Y 1.25-6	YF 1.25-6	YF 1.25-6H	6.4	22-18	0.5-1.5	
Y 2-3	YF 2-3	YF 2-3H	3.7	16-14	1.5-2.5	
Y 2-4	YF 2-4	YF 2-4H	4.3	16-14	1.5-2.5	
Y 2-5	YF 2-5	YF 2-5H	5.3	16-14	1.5-2.5	
Y 2-6	YF 2-6	YF 2-5H	6.4	16-14	1.5-2.5	
Y 3.5-4	YF 3.5-4	YF 3.5-4H	4.3	14-12	2.5-4	
Y 3.5-5	YF 3.5-5	YF 3.5-5H	5.3	14-12	2.5-4	
Y 3.5-6	YF 3.5-6	YF 3.5-6H	6.4	14-12	2.5-4	
Y 5.5-3	YF 5.5-3	YF 5.5-3H	3.7	12-10	4-6	
Y 5.5-4	YF 5.5-4	YF 5.5-4H	4.3	12-10	4-6	
Y 5.5-5	YF 5.5-5	YF 5.5-5H	5.3	12-10	4-6	
Y 5.5-6	YF 5.5-6	YF 5.5-6H	6.4	12-10	4-6	



• All sizes in mm unless otherwise stated

R-TYPE TERMINALS (continued)

Unit: mm

• All sizes in mm unless otherwise stated



Part No.	Stud	AWG	DIN	Qty	Part No.	Stud	AWG	DIN	Qty in	
	Size			mm ²		In box			Size	mm ²
R 76-6	6.4	2/0	70	100	R 150-6	6.4	250-300 mcm	150	40	
R 70-8	8.4				R 150-8	8.4				
R 70-10	10.5				R 150-10	10.5				
R 70-11	11.5				R 150-11	11.5				
R 70-12	13				R 150-12	13				
R 70-14	15			90	R 150-14	15			30	
R 70-16	17				R 150-16	17				
R 70-18	19				R 150-8L	8.4				
R 70-20	21				R 150-10L	10.5				
R 70-22	23				R 150-12L	13				
R 80-6	6.4	3/0	95	50	R 150-16L	17	300-350 mcm	185		40
R 80-8	8.4				R 150-18	19				
R 80-10	10.5				R 150-20	21				
R 80-11	11.5				R 150-22	23				
R 80-12	13				R 150-24	25				
R 80-8L	8.4				R 150-27	28			20	
R 80-10L	10.5				R 180-8	8.4				
R 80-12L	13				R 180-10	10.5				
R 80-14	15				R 180-11	11.5				
R 80-16	17				R 180-12	13				
R 80-18	19	R 180-14	15							
R 80-22	23	R 180-16	17							
R 100-6	6.4	4/0	120	60	R 180-8L	8.4	300-350 mcm	185		20
R 100-8	8.4				R 180-10L	10.5				
R 100-10	10.5				R 180-12L	13				
R 100-11	11.5				R 180-16L	17				
R 100-12	13				R 180-18	19				
R 100-8L	8.4				R 180-20	21				
R 100-10L	10.5				R 180-22	23				
R 100-12L	13				R 180-24	25				
R 100-14	15				R 180-27	28				
R 100-16	17									
R 100-18	19									
R 100-20	21									
R 100-22	23									

R-TYPE TERMINALS (continued)

Unit: mm

- All sizes in mm unless otherwise stated



Part No.	Stud	AWG	DIN mm ²	Qty	Part No.	Stud	AWG	DIN	Qty in
	Size			In box		Size			mm ²
R 200-8	8.4	400 mcm	240	24	R 325-8	8.4	500-600 mcm	300	10
R 200-10	10.5				R 325-10	10.5			
R 200-11	11.5				R 325-11	11.5			
R 200-12	13				R 325-12	13			
R 200-14	15				R 325-14	15			
R 200-16	17				R 325-16	17			
R 200-8L	8.4			15	R 325-8L	8.4			
R 200-10L	10.5				R 325-10L	10.5			
R 200-12L	13				R 325-12L	13			
R 200-16L	17				R 325-16L	17			
R 200-18	19				R 325-18	19			
R 200-20	21				R 325-20	21			
R 200-22	23				R 325-22	23			
R 200-24	25				R 325-24	25			
R 200-27	28				R 325-27	28			

B-TYPE BUTT SPLICE

Unit: mm

Part No.	L	DØ	D1Ø	AWG	Din mm ²	Qty
						In box
B 1.25	15	3.3	1.9	22-15	0.5-1.0	2,000
B 2	15	4.0	2.3	16-14	1.5-2.5	2,000
B 5.5	15	5.5	3.4	12-10	4-6	1,000
B 8	21	7.1	4.5	8	10	500
B 14	26	9.0	5.8	6	16	300
B 22	29	11.4	7.7	4	25	250
B 38	32	13.3	9.4	2	35	100
B 60	36	15.4	11.4	1/0	50	100
B 70	37	17.5	13.3	2/0	70	100
B 80	38	19.4	14.5	3/0	95	70
B 100	38	22.0	16.4	4/0	120	60
B 150	54	26.5	19.4	250-300mcm	150	25
B 180	57	28.2	21.0	300-350mcm	185	20
B 200	63	32.5	24.0	400mcm	240	15
B 325	72	37.0	28.0	500-600mcm	300	12



- All sizes in mm unless otherwise stated

ALL PLASTIC WITH WIRE SPRING




Unit: mm

Part No.	B	C	E	Wire Combination	Packing
SW-71BH	6.7	8.6	15.2	Max 1#16 w/1 #18 w/1#20 Min 2#22	100pcs (1000pcs)
SW-72BH	7.0	9.8	17.6	Max 3#16 Min 2#22	
SW-73BH	9.6	12.6	22.0	Max 4#16 w/1 #20 Min 1#18 w/1 #20	
SW-74BH	11.2	14.0	24.0	Max 2#12 w/2 #14 Min 3#20 S01	
SW-76BH	13.0	16.2	26.2	Max 2#10 sol w/2 #12 Min 3#18	



- Material: Tough thermoplastic. UL 94V-2 flame-retardant shell.
- Strip wires before application.
- Rated at 600 volt max. for building wiring.



HEAVY DUTY CONNECTORS




Unit: mm

Part No.	B	C	E	Wire Combination	Packing
SW-Y11H	8.5	17.5	25.8	Max 3#12 Min 2#18	100pcs/bag
SW-Y12H	11	23.8	31.8	Max 5#12 Min 3#16	
SW-Y13H	14	27	33.2	Max 3#10 Min 3#14 w/1 #18	
SW-Y14H	17.5	30.5	39.6	Max 3#18 w/1 #12 Min 3#18 w/q #12	



- Material: Tough thermoplastic. UL 94V-2 flame-retardant shell.
- Two wing attached to the plastic body for easy twist on termination of wires.
- Strip wires before application.
- Rated at 600 volt max. for building wiring.



MID-WAY WIRE CONNECTOR

Unit: mm

Part No.		Wire Suitable	Color	Packing
PP	NYLON			
KW-1	KW-1N	18AWG-14AWG	Blue	100pcs
KW-2	KW-2N	18AWG-14AWG	Blue	
KW-3	KW-3N	22AWG-18AWG	Red	
KW-4	KW-4N	18AWG-14AWG	Blue	
KW-5	KW-5N	12AWG-10AWG	Yellow	
KW-6	KW-6N	22AWG-20AWG	Red	
KW-6L	KW-6LN	18AWG-14AWG	Red	
KW-10	KW-10N	22AWG-18AWG	Red	
KW-11	KW-11N	16AWG-14AWG	Blue	
KW-12	KW-12N	12AWG-10AWG	Yellow	



- Material: PP or NYLON
- Insert wires to be connected on the grooves of connector, clamps down the plastic body and electricity can be conducted.