


Lumin 



LED LIGHTING  
CATALOGUE




**LUMINO LIGHTING LTD** is known as LED solution providers. We produce state-of-art LED luminaries with appealing design and outstanding quality. Lumino has built a good reputation at home and abroad with top quality product and advanced lighting solution.

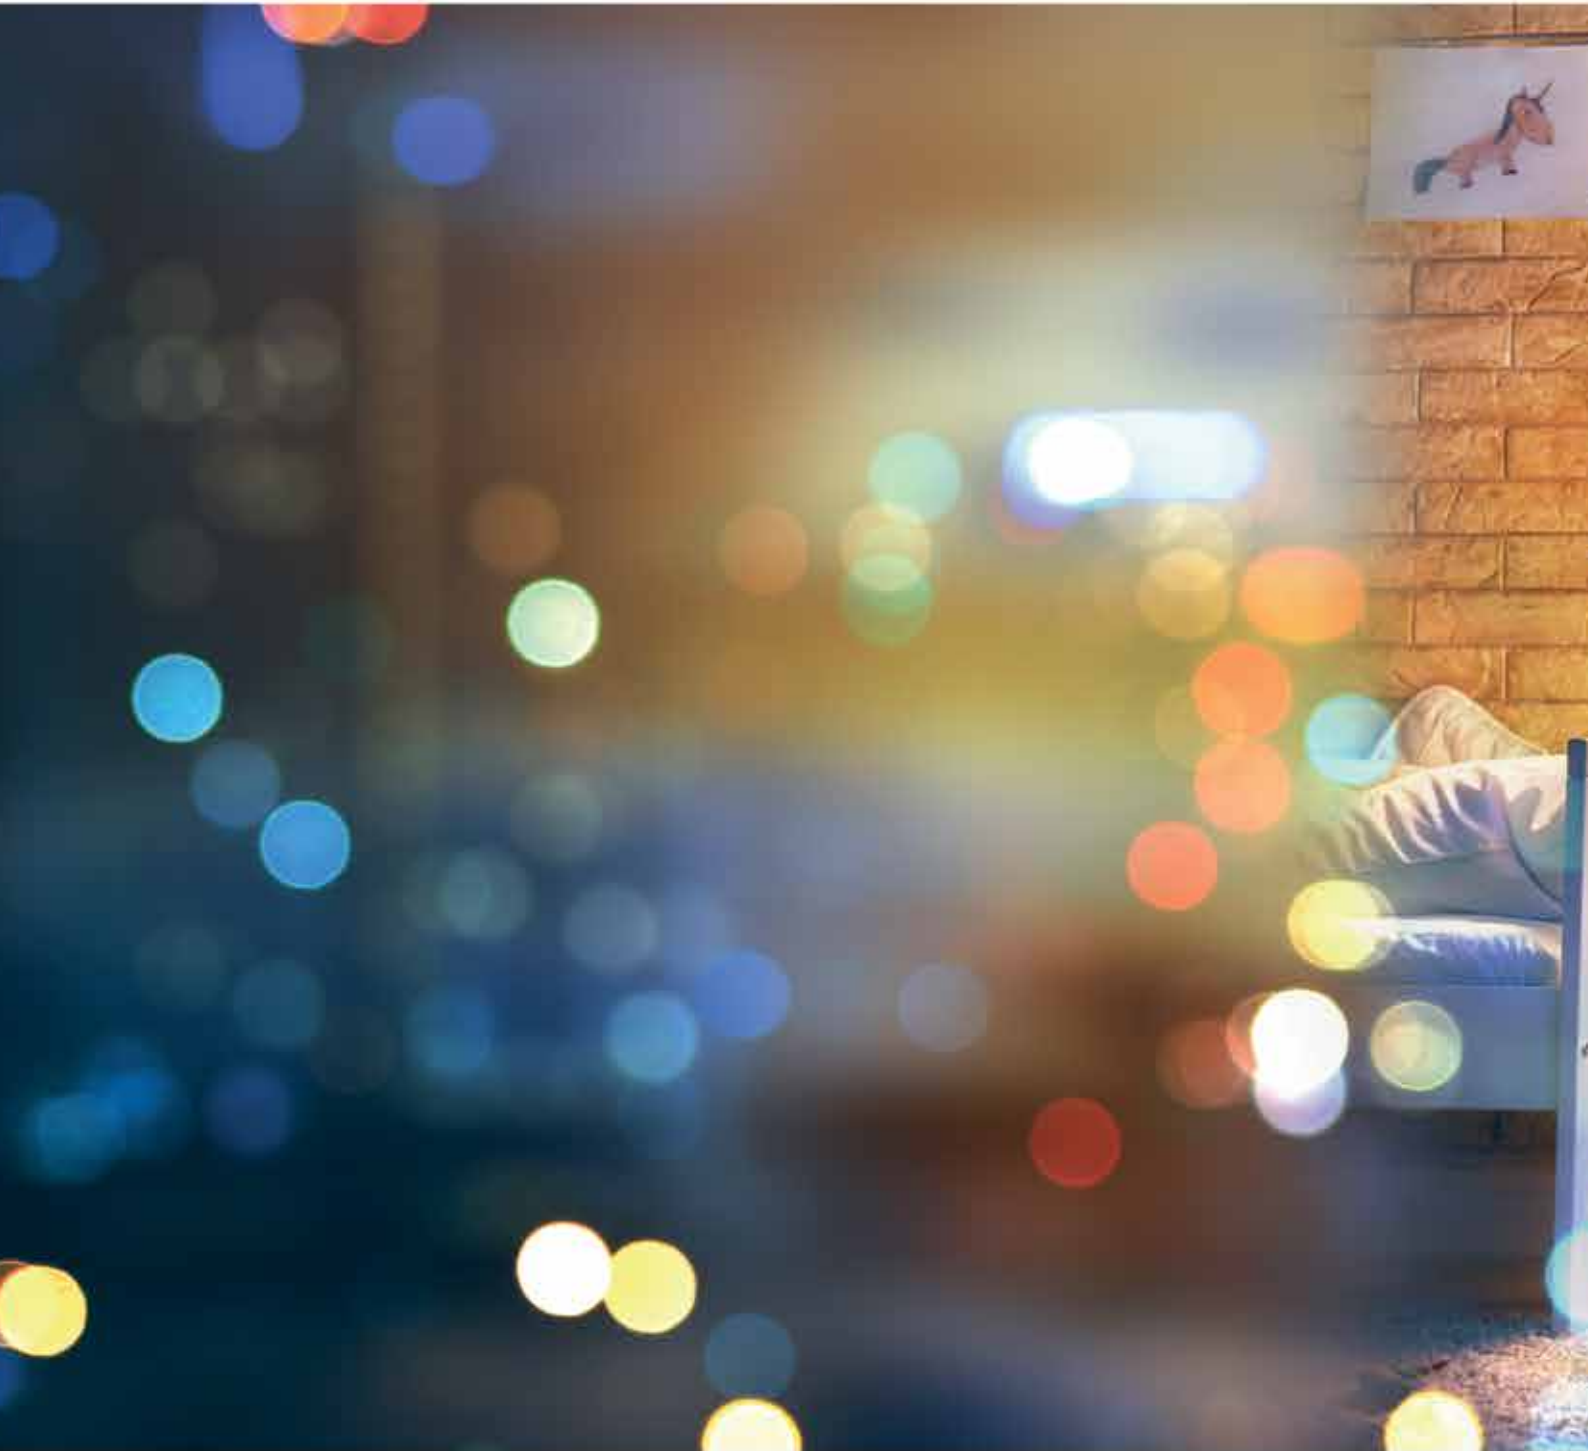

**Quality matters:** Our manufacturing excellence and strict quality control is the key in establishing us as the niche market player for LED lighting, Each one of our product is made with high quality branded LEDs and Components.

**Product Range:** Our extensive range of Indoor and Outdoor lighting is capable to cover the entire spectrum of project requirements.

**Research & Development:** Our R&D team devotes itself to produce advanced technology products with most cost effective solution. We have committed to improving ourselves by paying more attention to our customers demand.

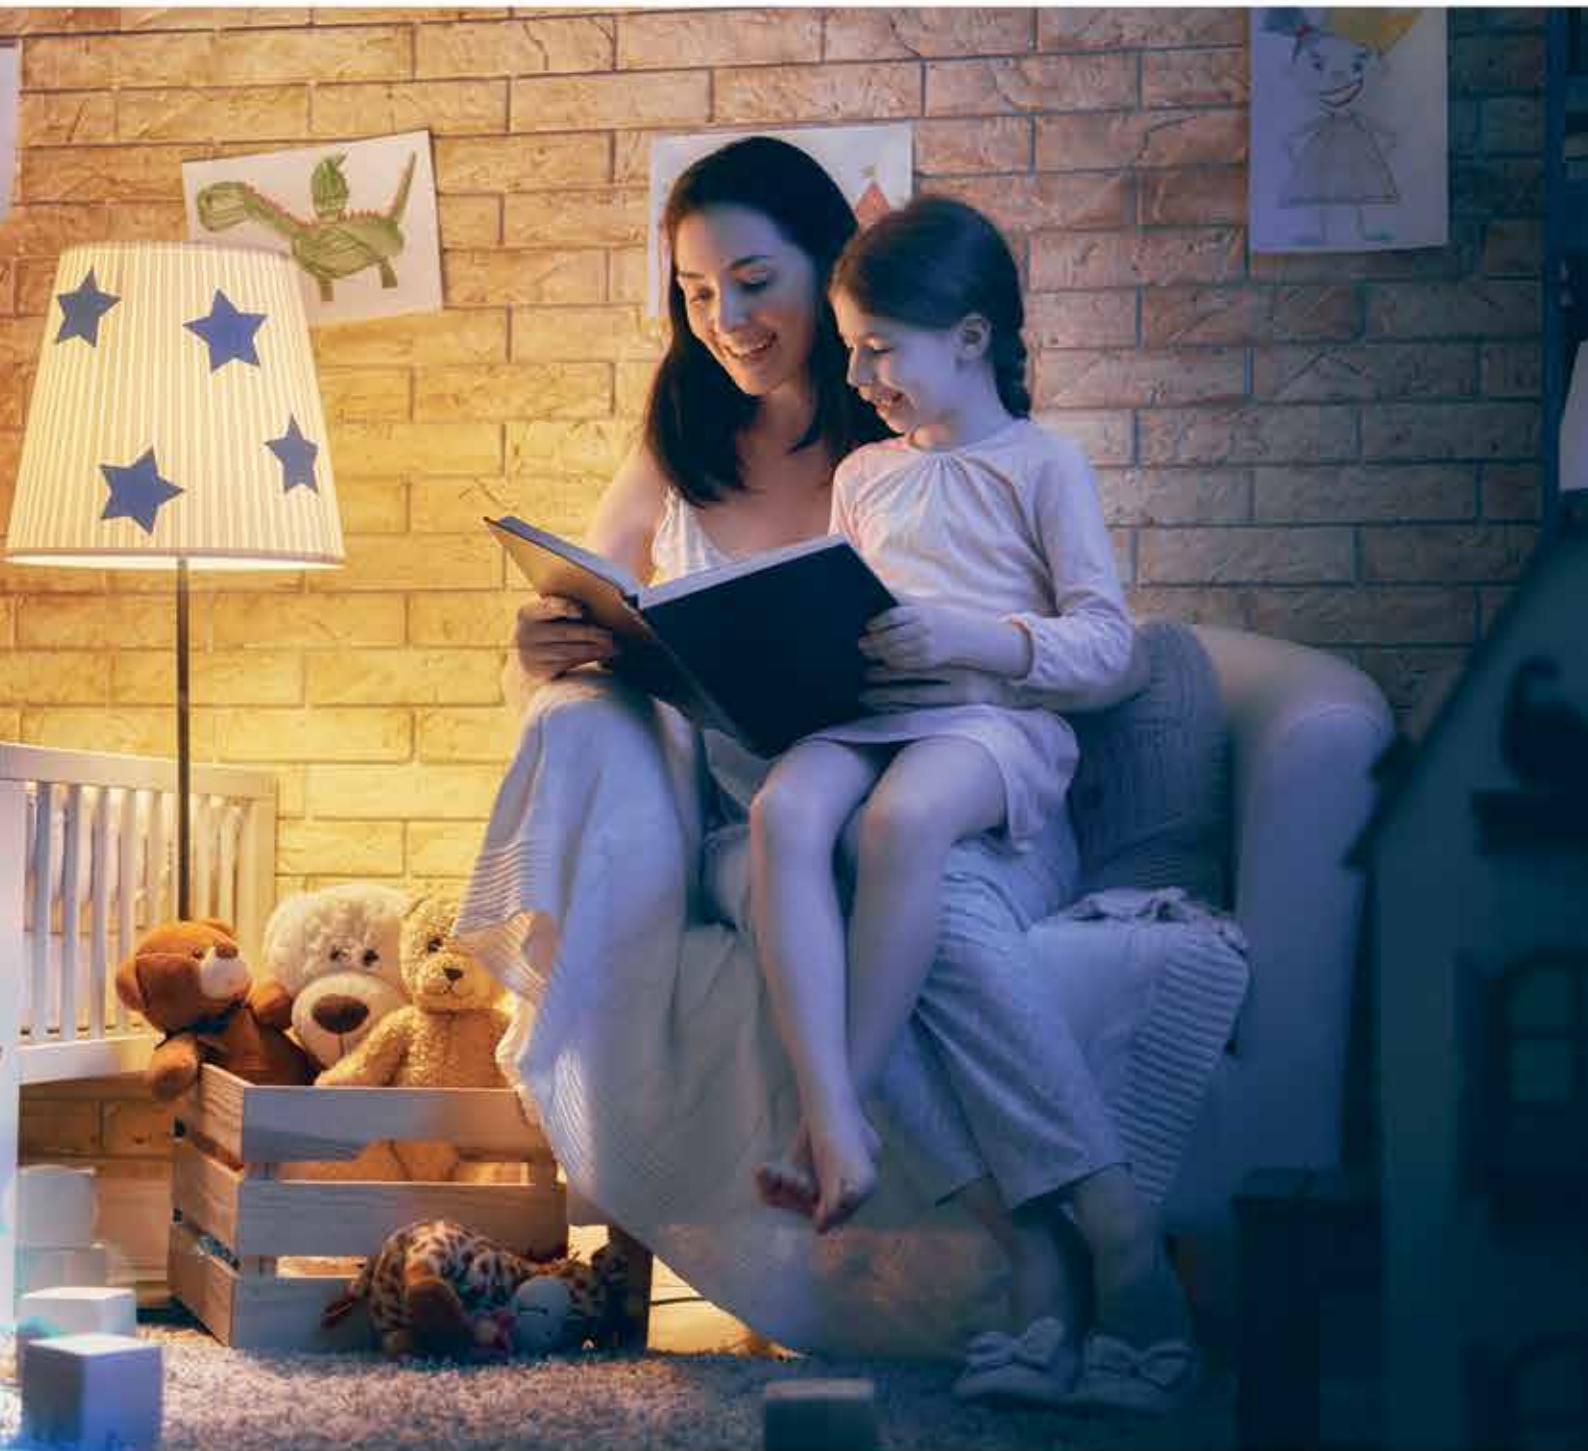

**Testing:** All of our products are tested and certified for CE, ROHS Compliant. Testing is a very important part in our manufacturing process to ensure that our product maintain highest quality.


# INDEX

## SPOT LIGHT

PAGE 08-12



DORON

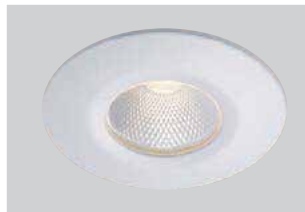

PRO SPOT



PRO SPOT

## DOWN LIGHT

PAGE 13-25




PRO ACCENTE



COLORON



COLORADO

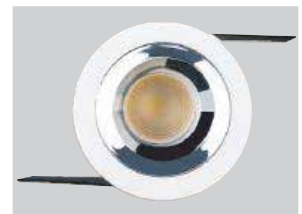

MOBI ECO

## LED PANEL LIGHT

PAGE 26-37



EDGE LITE



SLIM PANEL



SLIM - SQUARE



LAPISTA PRO



TRACKY DECO

## LED TRACK LIGHT


PAGE 38-49





# LED LINEAR LIGHT

PAGE 50-55

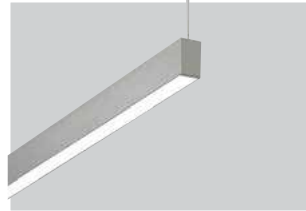

LUMI LINEAR



LUMI LINEAR



SURFACE BETA



CEILING & WALL DECO



# LED CEILING & PENDENT LIGHT

PAGE 56-65

# LED STRIP LIGHT


PAGE 66-71



LED FLEX



NEON FLEX

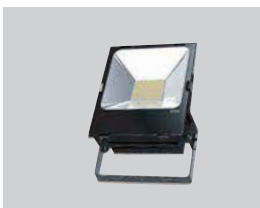

FOCSY - SMD



ROCI PRO



ROCI PRO SQUARE

# LED FLOOD LIGHT & PROJECTOR

PAGE 72-75

# INDEX

## LED WEATHER PROOF

PAGE 76-77



LED PARKADE



TRI-PROOF

---

## LED HIGHBAY

PAGE 78-83




POLO



APOLO



CORE LINE



BHH



LMBHF

## BULK HEAD

PAGE 84-87

---

## STREET LIGHT

PAGE 88-90



SATURN



URBAN STREE



## LED SOLAR BOLLARD

PAGE 91



# SPOT LIGHT

## Doron

Perfect solution for dark spot applications, made of die cast aluminum body small and unique design.



DS1



DS2



DS3



DS4



DS1




DS5




DS6



DS6



Model no.	Dimension (mm)	Cut out(mm)	Power	Lumen
LMDS1-1-CCT	Φ40x36	Φ35	1W	70lm
LMDS1-3-CCT	Φ50x44	Φ45	3W	200lm



Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMDS6-1-CCT	Φ68x30	Φ55	5W	400lm
LMDS6-3-CCT	Φ85x32	Φ70	8W	640lm



# Doron



DS2

● Gray ● Black ○ White  
COB CRI >90 15° 2700K 3000K 4000K 6500k °25 Tilttable

Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMDS2-3-CCT	Φ50x60	Φ45	3W	200lm
LMDS2-5-CCT	Φ75x80	Φ65	5W	350lm
LMDS2-7-CCT	Φ75x80	Φ65	7W	490lm
LMDS2-10-CCT	Φ83x80	Φ70	10W	700lm

● Gray ● Black ○ White  
COB CRI >90 15° 2700K 3000K 4000K 6500k °25 Tilttable

Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMDS3-1-CCT	Φ47x42	Φ40	1W	70lm
LMDS3-3-CCT	Φ47x42	Φ40	3W	200lm
LMDS3-5-CCT	Φ58x46	Φ50	5W	350lm



DS3



DS4

● Gray ● Black ○ White  
COB CRI >90 25° 2700K 3000K 4000K 6500k

Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMDS4-1-CCT	Φ43x20	Φ35	1W	80lm

● Gray ● Black ○ White  
COB CRI >90 25° 2700k 3000k 4000K 6500k

Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMDS5-3-CCT	Φ59x21	Φ45	3W	250lm



# SPOT LIGHT



## PRO SPOT

LED recessed professional spotlight, with die-cast aluminum body.

## FEATURES

Available with DALI dimming

8W, 12W & 15W

Life span 50,00 Hrs

Operating temperature 0-45°C

High efficiency reflector

Adjustable 0°-30° onto the vertical plane

and rotates by 360° onto the horizontal plane.

Projection level is IP44/IP65



Housing - High pressure die-cast aluminum

Lens - Clear polycarbonate lens

Heatsink - Made of die-cast aluminum and designed in support of the heat dissipation function, which facilitate the heat exchange quickly from die-cast aluminum housing to the air.





### ADJUSTABLE - 6W

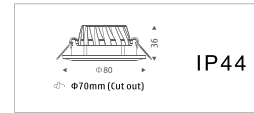


Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-A6S-830	6W	500 Lm	40°	80	3000K	85
LM-A6S-840	6W	530 Lm	40°	80	4000K	88
LM-A6S-850	6W	560 Lm	40°	80	5000K	91





### FIXED - 6W

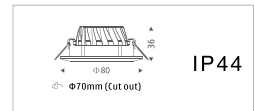

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-F6S-830	6W	500 Lm	40°	80	3000K	85
LM-F6S-840	6W	530 Lm	40°	80	4000K	88
LM-F6S-850	6W	560 Lm	40°	80	5000K	91

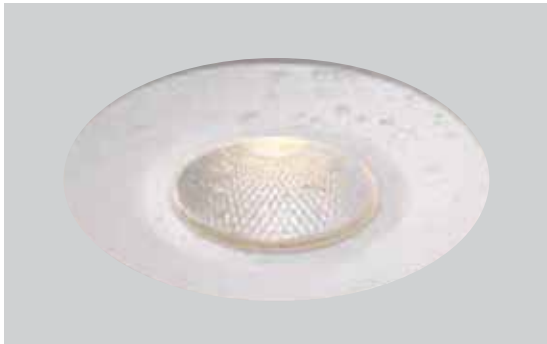



### IP RATED - 7W



Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-IP7S-830	7W	650 Lm	40°	80	3000K	94
LM-IP7S-840	7W	675 Lm	40°	80	4000K	97
LM-IP7S-850	7W	700 Lm	40°	80	5000K	100



### IP RATED - 15W

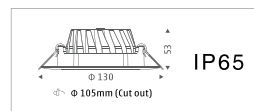

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-IP15S-830	15W	1320 Lm	40°	80	3000K	85
LM-IP15S-840	15W	1360 Lm	40°	80	4000K	88
LM-IP15S-850	15W	1400 Lm	40°	80	5000K	91

# SPOT LIGHT

## PIN HOLE SPOT LIGHT

LED recessed Pin Hole Spotlight,  
available in variety of reflector shades  
(Black, White, Gold & Silver)  
IP 20, Life Span: 30,000 Hrs  
Also available in 12W & 15W



Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w	Dimension	Cutout
LM-PH7SA-830	7W	490 Lm	36/60°	>80	3000K	70	Φ95mm x H78mm	Φ75
LM-PH7SA-840	7W	525 Lm	36/60°	>80	4000K	75	Φ95mm x H78mm	Φ75
LM-PH7SA-865	7W	560 Lm	36/60°	>80	6500K	80	Φ95mm x H78mm	Φ75



LM-PH7SA (ABCD)

Suppose for GOLD colour - LM-PH7SAC-830



Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w	Dimension	Cutout
LM-PH7SC-830	7W	490 Lm	36/60°	>80	3000K	70	Φ95mm x H78mm	Φ40
LM-PH7SC-840	7W	525 Lm	36/60°	>80	4000K	75	Φ95mm x H78mm	Φ40
LM-PH7SC-865	7W	560 Lm	36/60°	>80	6500K	80	Φ95mm x H78mm	Φ40



Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w	Dimension	Cutout
LM-PH7SB-830	7W	490 Lm	36/60°	>80	3000K	70	Φ95mm x H78mm	Φ42
LM-PH7SB-840	7W	525 Lm	36/60°	>80	4000K	75	Φ95mm x H78mm	Φ42
LM-PH7SB-865	7W	560 Lm	36/60°	>80	6500K	80	Φ95mm x H78mm	Φ42



# DOWN LIGHT

## Pro Accente


Accent downlight with amazing reflectance to get the desired appearance. CREE, BRIDGELUX COB module High lumen, high CRI, vivid & uniform lighting effect. Multiple beam angles accurate distribution, soft & comfortable lighting effect high quality aluminum, die-cast heat sink, vortex and convective dissipation technology Module design, adapted to different functions and dimensions of lamp housing.



PA01  
Adjustable



PA02  
Fixed



PA03  
Square

### FEATURES

Available with DALI dimming  
Life span: 50,000 Hrs  
Protection level is IP20/IP44



PA04  
Trimless




PA05  
Wallwasher



# DOWN LIGHT




## PA01 Adjustable



Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMPA01-9-CCT	Φ90x100	Φ75	9W	720lm
LMPA01-12-CCT	Φ90x100	Φ75	12W	960lm
LMPA01-15-CCT	Φ115x130	Φ100	15W	1200lm
LMPA01-20-CCT	Φ115x130	Φ100	20W	1600lm
LMPA01-25-CCT	Φ140x150	Φ125	25W	2000lm
LMPA01-30-CCT	Φ140x150	Φ125	30W	2400lm
LMPA01-35-CCT	Φ165x175	Φ150	35W	2800lm
LMPA01-40-CCT	Φ165x175	Φ150	40W	3200lm




## PA02 Fixed



Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMPA02-9-CCT	Φ85x83	Φ75	9W	720lm
LMPA02-12-CCT	Φ85x83	Φ75	12W	960lm
LMPA02-15-CCT	Φ110x110	Φ100	15W	1200lm
LMPA02-20-CCT	Φ110x110	Φ100	20W	1600lm
LMPA02-25-CCT	Φ135x125	Φ125	25W	2000lm
LMPA02-30-CCT	Φ135x125	Φ125	30W	2400lm
LMPA02-35-CCT	Φ160x150	Φ150	35W	2800lm
LMPA02-40-CCT	Φ160x150	Φ150	40W	3200lm




## PA03 Square



Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMPA03-9-CCT	90x90x100	75x75	9W	720lm
LMPA03-12-CCT	90x90x100	75x75	12W	960lm
LMPA03-15-CCT	115x115x130	100x100	15W	1200lm
LMPA03-20-CCT	115x115x130	100x100	20W	1600lm
LMPA03-25-CCT	140x140x150	125x125	25W	2000lm
LMPA03-30-CCT	140x140x150	125x125	30W	2400lm
LMPA03-35-CCT	165x165x175	150x150	35W	2800lm
LMPA03-40-CCT	165x165x175	150x150	40W	3200lm



## PA04 Trimless




Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMPA04-9-CCT	Φ115x100	Φ80	9W	720lm
LMPA04-12-CCT	Φ115x100	Φ80	12W	960lm
LMPA04-15-CCT	Φ140x130	Φ105	15W	1200lm
LMPA04-20-CCT	Φ140x130	Φ105	20W	1600lm
LMPA04-25-CCT	Φ165 x 151	Φ130	25W	2000lm
LMPA04-30-CCT	Φ165 x 151	Φ130	30W	2400lm
LMPA04-35-CCT	Φ190 x179	Φ155	35W	2800lm
LMPA04-40-CCT	Φ190 x179	Φ155	40W	3200lm









## PA05 Wallwasher

● Gray ● Black ○ White



Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMPA05-9-CCT	Φ90x76	Φ75	9W	720lm
LMPA05-12-CCT	Φ90x76	Φ75	12W	960lm
LMPA05-15-CCT	Φ115x100	Φ100	15W	1200lm
LMPA05-20-CCT	Φ115x100	Φ100	20W	1600lm
LMPA05-25-CCT	Φ140x112	Φ125	25W	2000lm
LMPA05-30-CCT	Φ140x112	Φ125	30W	2400lm
LMPA05-35-CCT	Φ165x132	Φ150	35W	2800lm
LMPA05-40-CCT	Φ165x132	Φ150	40W	3200lm

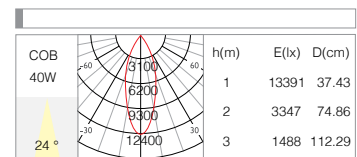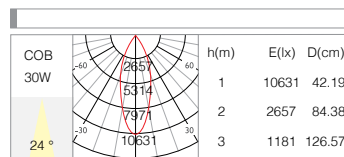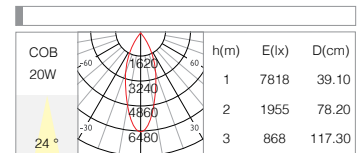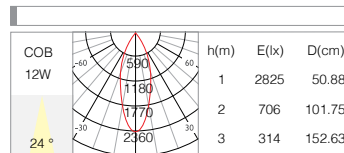

### Specific characteristics



Non-flicker driver for option



Dimmable driver for option



Serialized products, multiple dimensions for choice



Different colors for Anti-glare ring



Suitable for wallwashing





cut-off angle > 30°



UGR < 15

# DOWN LIGHT

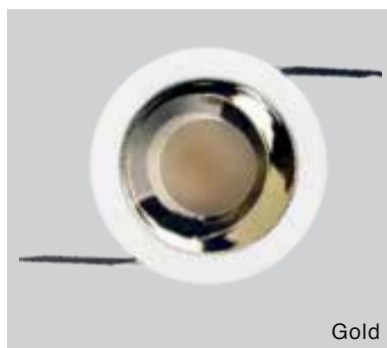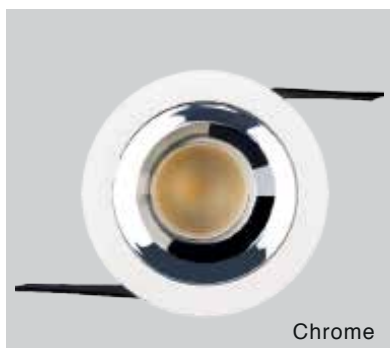

## MOBI DOWNLIGHT - ECO

LED recessed downlight with simple and exquisite appearance and good heat dissipation performance. The design reflector structure is designed for anti-glare and excellent lighting effect.  
Reflector: Chrome, White, Gold




## FEATURES

Available in 12°/24°/36° Beam angle  
Die-cast aluminum body.  
Available with DALI dimming  
Life span: 50,000 Hrs  
High efficiency reflector  
Protection level is IP20  
Lens - Frosted polycarbonate lens  
Heatsink - Made of die-cast aluminum and designed in support of the heat dissipation function, which facilitate the heat exchange quickly from die-cast aluminum housing to the air.







Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-MDNE10-830	10W	850 Lm	60°	80	3000K	85
LM-MDNE10-840	10W	880 Lm	60°	80	4000K	88
LM-MDNE10-865	10W	900 Lm	60°	80	6500K	90

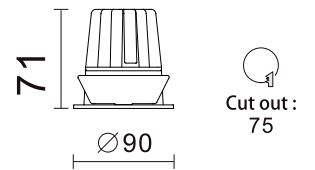


Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-MDNE20-830	20W	1700 Lm	60°	80	3000K	85
LM-MDNE20-840	20W	1760 Lm	60°	80	4000K	88
LM-MDNE20-865	20W	1800 Lm	60°	80	6500K	90

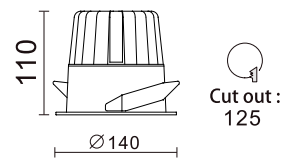

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-MDNE30-830	30W	2550 Lm	60°	80	3000K	85
LM-MDNE30-840	30W	2640 Lm	60°	80	4000K	88
LM-MDNE30-865	30W	2700 Lm	60°	80	6500K	90

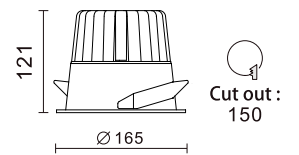

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-MDNE40-830	40W	3400 Lm	60°	80	3000K	85
LM-MDNE40-840	40W	3520 Lm	60°	80	4000K	88
LM-MDNE40-865	40W	3600 Lm	60°	80	6500K	90

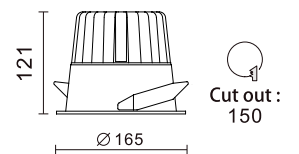


# DOWN LIGHT

## Planos IP

IP rated range of downlight with advanced thermal design made of die-cast aluminum body. Unique design and production process, simple and flexible, stable and practical. IP65



### PI01



Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMPIP-10-CCT	Φ88x91	Φ75	10W	800lm



Matt silver



Glossy silver



Black



Golden

### PI02

Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMPI02-10-CCT	Φ100x75	Φ90	10W	800lm
LMPI02-20-CCT	Φ140x90	Φ130	20W	1600lm
LMPI02-30-CCT	Φ185x112	Φ170	30W	2400lm
LMPI02-40-CCT	Φ230x128	Φ170	40W	3200lm



# Coloron



Constructional measures ensure that the LED modules operate within their ideal thermal range so they achieve output for the specified power throughout their operational life.  
Body made of die-cast aluminum.



**CR**




**CS**

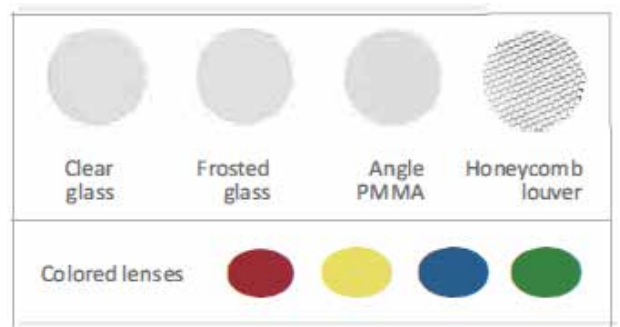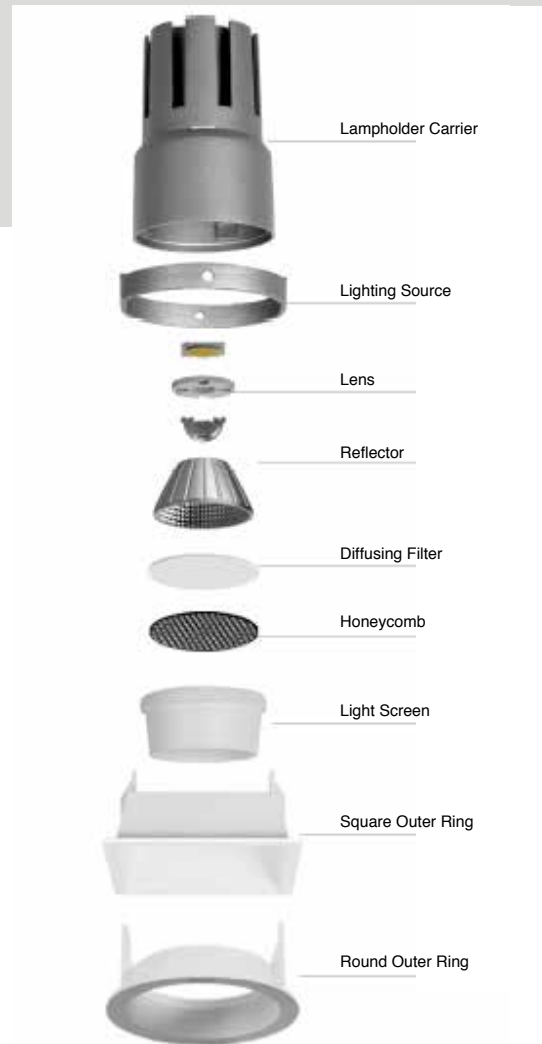

# DOWN LIGHT




## CR



Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMCR01-5-CCT	Ø82x70	Ø75	5W	360lm
LMCR01-7-CCT	Ø82x70	Ø75	7W	500lm
LMCR01-10-CCT	Ø95x111	Ø185	10W	700lm
LMCR01-15-CCT	Ø120x144	Ø105	15W	1050lm
LMCR01-20-CCT	Ø120x144	Ø105	20W	1400lm




## CS

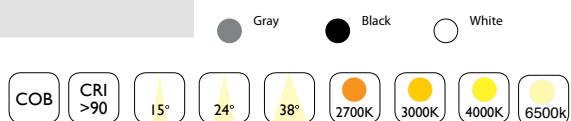

Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMCS01-5-CCT	82x82x70	75x75	5W	360lm
LMCS01-7-CCT	82x82x70	75x75	7W	500lm
LMCS01-10-CCT	108x108x117	100x100	10W	700lm
LMCS01-15-CCT	130x130x153	120x120	15W	1050lm
LMCS01-20-CCT	130x130x153	120x120	20W	1400lm

## CSS

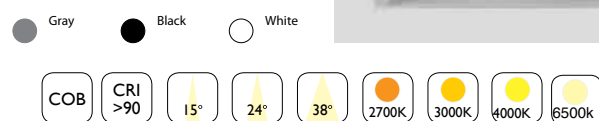

Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMCSS01-5-CCT	82x160x70	75x145	2X5W	720lm
LMCSS01-7-CCT	82x160x70	75x145	2X7W	1000lm
LMCSS01-10-CCT	108x226x117	100x195	2X10W	1400lm
LMCSS01-15-CCT	130x251x153	120x235	2X15W	2100lm
LMCSS01-20-CCT	130x251x153	120x235	2X20W	2800lm






# Colorado

Exquisite appearance and good heat dissipation performance. The design reflector structure is designed for anti-glare and excellent lighting effect. Body made of die cast aluminum with white plastic reflector.




Model no.	Power	Lumen
LMC1-10-CCT	10W	950lm
LMC1-12-CCT	12W	1150lm
LMC1-15-CCT	15W	1425lm

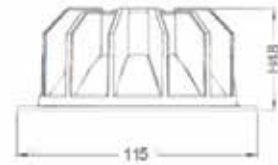

10W, 12W & 15W


Model no.	Power	Lumen
LMC2-12-CCT	12W	1150lm
LMC2-15-CCT	15W	1425lm
LMC2-20-CCT	20W	1900lm

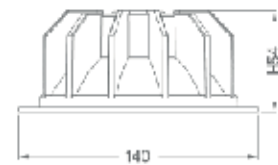

12W, 15W & 20W




Model no.	Power	Lumen
LMC3-25-CCT	25W	2375lm
LMC3-30-CCT	30W	2850lm
LMC3-35-CCT	35W	3325lm




25W, 30W & 35W

Model no.	Power	Lumen
LMC4-35-CCT	35W	3325lm
LMC4-40-CCT	40W	3800lm
LMC4-50-CCT	50W	4500lm





35W, 40W & 50W



# DOWN LIGHT


## Leviado

Body made of die cast aluminum with glossy aluminum reflector. On the premise of satisfying optics and heat dissipation, the height of the whole lamp is designed to be extremely low. Professional light distribution, accurate light control, Uniform soft light and high luminous efficiency.

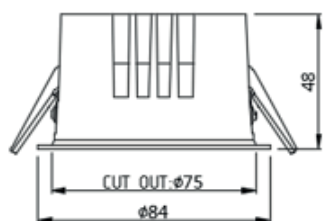


cut out 75

Model no.	Power	Lumen
LML1-7-CCT	7W	630lm
LML1-10-CCT	10W	900lm
LML1-12-CCT	12W	1080lm

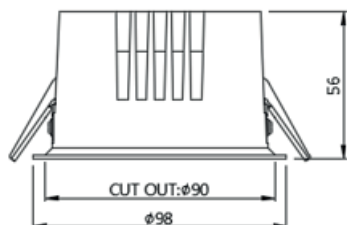

cut out 90

Model no.	Power	Lumen
LML2-10-CCT	10W	900lm
LML2-12-CCT	12W	1080lm
LML2-15-CCT	15W	1350lm

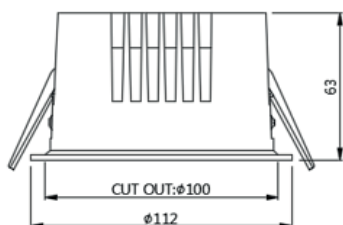

cut out 100

Model no.	Power	Lumen
LML3-12-CCT	12W	1080lm
LML3-15-CCT	15W	1350lm
LML3-20-CCT	20W	1800lm





# Rolon


355° Rotation and Stretchable, Switch between accent lighting and general lighting. Body made of Die-cast aluminum housing, ensure excellent heat dissipation.



RR	Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
	LMRR-15-CCT	Φ98x120	Φ90	15W	1200lm
	LMRR-25-CCT	Φ135x130	Φ120	25W	2000lm
	LMRR-35-CCT	Φ160x155	Φ140	30W	2800lm


RS1	Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
	LMRS1-15-CCT	100x100x120	Φ90	15W	1200lm
	LMRS1-25-CCT	130x130x135	Φ120	25W	2000lm

RS2	Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
	LMRS2-15-CCT	100x185x120	175x90	2X15W	2400lm
	LMRS2-25-CCT	130x240x135	230x120	2X25W	4000lm




# DOWN LIGHT

**BETA** Made of die-cast aluminum body with frosted diffuser.



/// Cut out ///

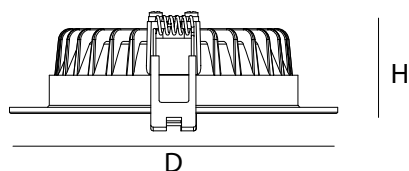

Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMB-3-CCT	Φ98x31	Φ70	3W	240lm
LMB-7-1CCT	Φ118x31.5	Φ90	7W	560lm
LMB-12-1CCT	Φ178x36	Φ155	12W	960lm
LMB-20-1CCT	Φ188x36	Φ160	20W	1600lm
LMB-30-1CCT	Φ240x40	Φ210	30W	2400lm





# BETA ECO


Made of die-cast aluminum housing, ensure excellent heat dissipation product serialization with various sizes available long lifespan 50,000 Hours



White

SMD  
  110°  
  2700K  
  3000K  
  4000K  
  6500K

==== Cut out =====




Model no.	Dimension(mm)	Cut out(mm)	Power	Lumen
LMBE -9-CCT	Φ100x27	Φ75	9W	810lm
LMBE-15-CCT	Φ120x27	Φ95	15W	1350lm
LMBE-25-CCT	Φ170x27	Φ145	25W	2250lm
LMBE-40-CCT	Φ225x35	Φ200	40W	3600lm



# LED PANEL LIGHT



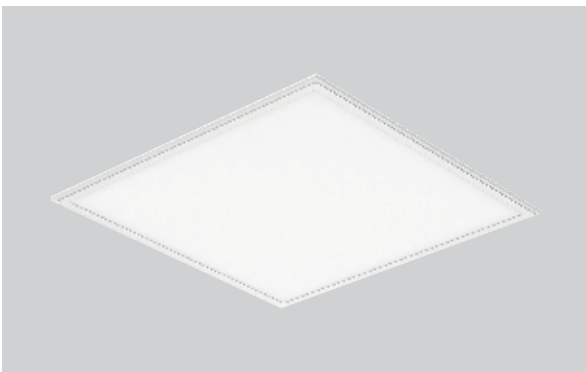

## EDGE LITE

Ultra thin design, 70% energy saving

Luminous efficiency up to 100lm/W

UGR<19

LIFESPAN : 50,000 HRS

No Flicker

Made of high quality aluminum frame.


with PMMA diffuser (No yellowing)

Size: 595 x 595 mm

IP 44 also available



# LED PANEL LIGHT

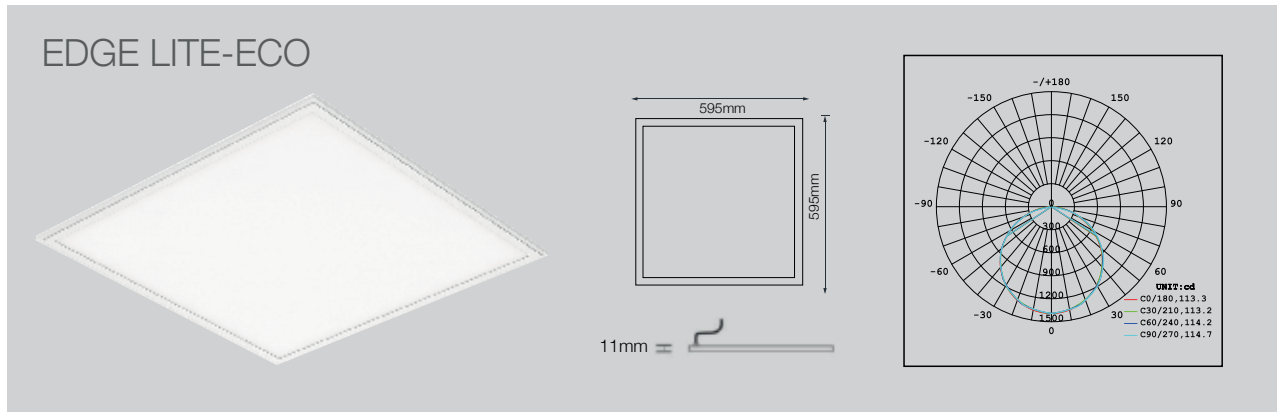


	Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w	Dimension
EDGE LITE-ECO - 30W 600 x 600, IP 20	LM-ELE-30-830	30W	2850 Lm	120°	>80	3000K	95	595mm x 595mm x 11mm
	LM-ELE-30-840	30W	2910 Lm	120°	>80	4000K	97	595mm x 595mm x 11mm
	LM-ELE-30-865	30W	3000 Lm	120°	>80	6500K	100	595mm x 595mm x 11mm

	Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w	Dimension
EDGE LITE-ECO - 40W 600 x 600, IP 20	LM-ELE-40-830	40W	3800 Lm	120°	>80	3000K	95	595mm x 595mm x 11mm
	LM-ELE-40-840	40W	3880 Lm	120°	>80	4000K	97	595mm x 595mm x 11mm
	LM-ELE-40-865	40W	4000 Lm	120°	>80	6500K	100	595mm x 595mm x 11mm

EDGE LITE-ECO65 - 40W • 600 x 600, IP 65

	Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w	Dimension
	LM-ELE65-40-830	40W	3400 Lm	120°	>80	3000K	85	595mm x 595mm x 14mm
	LM-ELE65-40-840	40W	3480 Lm	120°	>80	4000K	87	595mm x 595mm x 14mm
	LM-ELE65-40-865	40W	3600 Lm	120°	>80	6500K	90	595mm x 595mm x 14mm

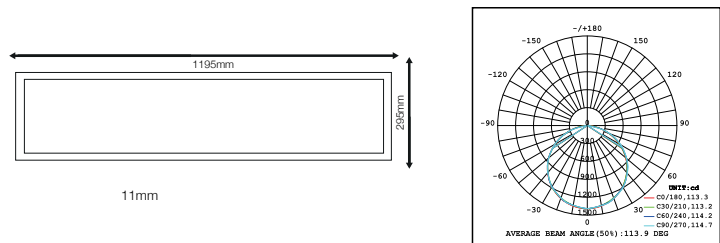

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w	Dimension
LM-ELE12x3-40-830	40W	3800 Lm	120°	>80	3000K	95	1195mm x 295mm x 11mm
LM-ELE12x3-40-840	40W	3880 Lm	120°	>80	4000K	97	1195mm x 295mm x 11mm
LM-ELE12x3-40-865	40W	4000 Lm	120°	>80	6500K	100	1195mm x 295mm x 11mm






# LED FRAME LIGHT

## EDGE LITE - FRAME

600mm x 600mm  
300mm x 1200mm

- Does not break ceiling integrity when installed
- Installed with ceiling tile
- Minimalist design

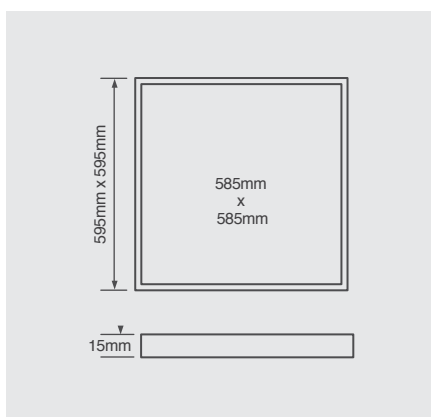


Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w	Dimension
LM-SFL36-830	36W	3600 Lm	120°	>80	3000K	100	595mm x 595mm x 15mm
LM-SFL36-840	36W	3960 Lm	120°	>80	4000K	110	595mm x 595mm x 15mm
LM-SFL36-865	36W	4320 Lm	120°	>80	6500K	120	595mm x 595mm x 15mm





# LED SLIM PANEL LIGHT



## LED SUPER SLIM PANEL

LED Slim panel light with PMMA lens, wide beam angle  
Die-cast aluminum body, powder coated.

## FEATURES

Control gear - Switchable, DALI  
Housing -High pressure die-cast aluminum  
Colours available in White, Black, Gray  
Operating temperature range 0°C to 45°C  
Life Span: 50,000Hrs






## SLIM - ROUND

Led Power: 9W  
560Lm-620Lm  
Light distribution:  
Wide Flood



145  
IP 20  
Φ 135mm(Cut out)




Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPR9-830	9W	560 Lm	110°	80	3000K	63
LM-LSPR9-840	9W	590 Lm	110°	80	4000K	66
LM-LSPR9-850	9W	620 Lm	110°	80	5000K	79

Led Power: 12W  
820Lm-880Lm  
Light distribution:  
Wide Flood



174  
IP 20  
Φ 160mm(Cut out)




Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPR12-830	12W	820 Lm	110°	80	3000K	68
LM-LSPR12-840	12W	850 Lm	110°	80	4000K	71
LM-LSPR12-850	12W	880 Lm	110°	80	5000K	74

Led Power: 18W  
1270Lm-1370Lm  
Light distribution:  
Wide Flood



225  
IP 20  
Φ 205mm(Cut out)




Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPR18-830	18W	1270 Lm	110°	80	3000K	70
LM-LSPR18-840	18W	1320 Lm	110°	80	4000K	73
LM-LSPR18-850	18W	1370 Lm	110°	80	5000K	77

Led Power: 24W  
1750Lm-1850Lm  
Light distribution:  
Wide Flood



302  
IP 20  
Φ 285mm(Cut out)







Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPR24-830	24W	1750 Lm	110°	80	3000K	72
LM-LSPR24-840	24W	1800 Lm	110°	80	4000K	75
LM-LSPR24-850	24W	1850 Lm	110°	80	5000K	78

# LED SLIM PANEL LIGHT

## SLIM - SQUARE

Led Power : 9W  
560Lm-620Lm  
Light distribution:  
Wide Flood

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPS9-830	9W	560 Lm	110°	80	3000K	63
LM-LSPS9-840	9W	590 Lm	110°	80	4000K	66
LM-LSPS9-850	9W	620 Lm	110°	80	5000K	79

Led Power: 12W  
820Lm-880Lm  
Light distribution:  
Wide Flood






Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPS12-830	12W	820 Lm	110°	80	3000K	68
LM-LSPS12-840	12W	850 Lm	110°	80	4000K	71
LM-LSPS12-850	12W	880 Lm	110°	80	5000K	74

Led Power: 18W  
1270Lm-1370Lm  
Light distribution:  
Wide Flood






Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPS18-830	18W	1270 Lm	110°	80	3000K	70
LM-LSPS18-840	18W	1320 Lm	110°	80	4000K	73
LM-LSPS18-850	18W	1370 Lm	110°	80	5000K	77

Led Power: 24W  
1750Lm-1850Lm  
Light distribution:  
Wide Flood







Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPS24-830	24W	1750 Lm	110°	80	3000K	72
LM-LSPS24-840	24W	1800 Lm	110°	80	4000K	75
LM-LSPS24-850	24W	1850 Lm	110°	80	5000K	78





## SURFACE SLIM - ROUND

Led Power: 9W  
560Lm-620Lm  
Light distribution:  
Wide Flood





Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPR9-S-830	9W	560 Lm	110°	80	3000K	63
LM-LSPR9-S-840	9W	590 Lm	110°	80	4000K	66
LM-LSPR9-S-850	9W	620 Lm	110°	80	5000K	79

Led Power: 12W  
820Lm-880Lm  
Light distribution:  
Wide Flood

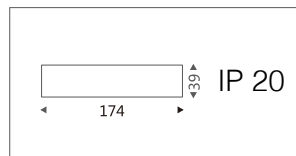

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPR12-S-830	12W	820 Lm	110°	80	3000K	68
LM-LSPR12-S-840	12W	850 Lm	110°	80	4000K	71
LM-LSPR12-S-850	12W	880 Lm	110°	80	5000K	74

Led Power: 18W  
1270Lm-1370Lm  
Light distribution:  
Wide Flood

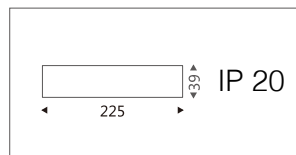

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPR18-S-830	18W	1270 Lm	110°	80	3000K	70
LM-LSPR18-S-840	18W	1320 Lm	110°	80	4000K	73
LM-LSPR18-S-850	18W	1370 Lm	110°	80	5000K	77






# LED SLIM PANEL LIGHT

## SURFACE SLIM - SQUARE






Led Power: 9W  
560Lm-620Lm  
Light distribution:  
Wide Flood

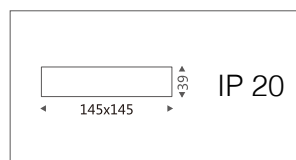




Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPS9-S-830	9W	560 Lm	110°	80	3000K	63
LM-LSPS9-S-840	9W	590 Lm	110°	80	4000K	66
LM-LSPS9-S-850	9W	620 Lm	110°	80	5000K	79

Led Power: 12W  
820Lm-880Lm  
Light distribution:  
Wide Flood

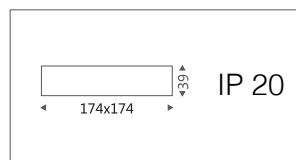

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPS12-S-830	12W	820 Lm	110°	80	3000K	68
LM-LSPS12-S-840	12W	850 Lm	110°	80	4000K	71
LM-LSPS12-S-850	12W	880 Lm	110°	80	5000K	74

Led Power: 18W  
1270Lm-1370Lm  
Light distribution:  
Wide Flood



Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LSPS18-S-830	18W	1270 Lm	110°	80	3000K	70
LM-LSPS18-S-840	18W	1320 Lm	110°	80	4000K	73
LM-LSPS18-S-850	18W	1370 Lm	110°	80	5000K	77



## TRIMLESS SURFACE



Model	Power	Item size (mm)	Light source	CCT	Beam Angle	Luminous Efficiency
LM228R-15	15W	120*H40	SMD	3000/4000/6500	120°	80Lm/W
LM228R-25	25W	175*H40	SMD	3000/4000/6500	120°	80Lm/W
LM228R-36	36W	225*H40	SMD	3000/4000/6500	120°	80Lm/W
LM228R-50	50W	300*H40	SMD	3000/4000/6500	120°	80Lm/W



Model	Power	Item size (mm)	Light source	CCT	Beam Angle	Luminous Efficiency
LM228S-15	15W	120*120*H40	SMD	3000/4000/6500	120°	80Lm/W
LM228S-25	25W	175*175*H40	SMD	3000/4000/6500	120°	80Lm/W
LM228S-36	36W	225*225*H40	SMD	3000/4000/6500	120°	80Lm/W
LM228S-50	50W	300*300*H40	SMD	3000/4000/6500	120°	80Lm/W

# LED TRACK LIGHT





# LAPISTA PRO

Unique design with high luminous efficiency, CRI>90, with uniform & comfortable light layout.  
 High quality aluminum heat sink to ensure ingenious shape and increase heat dissipation space.  
 Excellent precision optical design with high quality reflector  
 Built in driver, DALI Dimming, intelligent control functions for optional  
 Tilttable to satisfy different direction lighting requirements.



LP03



LP01  
Adjustable  
beam



LP02



LP06



LP04



LP05


## FEATURES

Available with DALI dimming  
 Life span: 50,000 Hrs  
 Protection level is IP20

# LED TRACK LIGHT



○ White ● Black

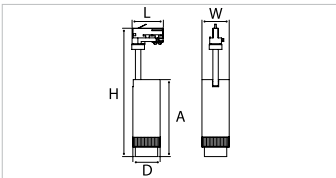

## LP01

Adjustable beam  
From 10° - 50°





Model no.	Power	Lumen	Dimension: L x W x H ( D / A)
LMLP01-15	15W	1275lm	86 x 75 x 353 ( 75 / 212)
LMLP01-20	20W	1700lm	86 x 75 x 353 ( 75 / 212)
LMLP01-25	25W	2125lm	91 x 89 x 380 ( 89 / 239)
LMLP01-30	30W	2550lm	91 x 89 x 380 ( 89 / 239)



○ White ● Black

## LP02

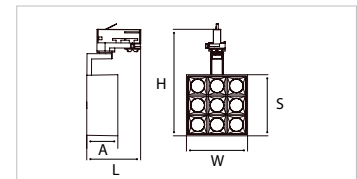


Model no.	Power	Lumen	Size : L x W x H ( S / A)
LMLP02-30	30W	2550lm	106x120x209(120/61)



○ White ● Black

## LP03

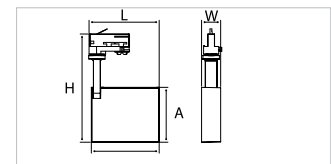

Model no.	Power	Lumen	Size : L x W x H ( S / A)
LMLP03-15	15W	1275lm	149 x 41 x 230( 144 / 117)
LMLP03-20	20W	1700lm	149 x 41 x 230( 144 / 117)







○ White ● Black

## LP04

**CREE** *bridgelux*

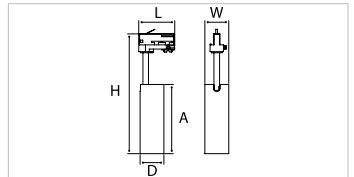



Model no.	Power	Lumen	Size : L x W x H ( D / A)
LMLP04-8	8W	680lm	86 x 57 x 286( 57 / 165)
LMLP04-15	15W	1275lm	86 x 57 x 286( 57 / 165)
LMLP04-15	15W	1275lm	86 x 71 x 326( 71 / 190)
LMLP04-20	20W	1700lm	86 x 71 x 326( 71 / 190)



○ White ● Black

## LP05

**CREE** *bridgelux*

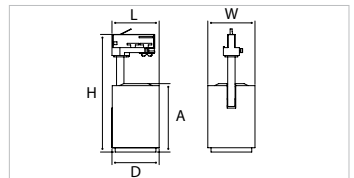



Model no.	Power	Lumen	Size : L x W x H ( D / A)
LMLP05-15	15W	1275lm	86 x 84 x 219( 84 / 120)
LMLP05-20	20W	1700lm	86 x 84 x 219( 84 / 120)
LMLP05-25	25W	2125lm	86 x 84 x 239( 84 / 140)
LMLP05-20	20W	1700lm	95 x 95 x 237( 95 / 138)
LMLP05-30	30W	2550lm	95 x 95 x 247( 95 / 148)
LMLP05-35	35W	2975lm	95 x 95 x 247( 95 / 148)



○ White ● Black

## LP06

**CREE** *bridgelux*

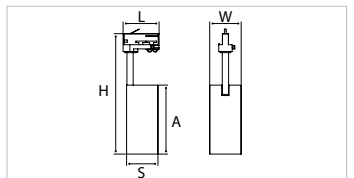

Model no.	Power	Lumen	Size : L x W x H ( S / A)
LMLP06-8	8W	680lm	86 x 55 x 288( 55 / 165)
LMLP06-12	12W	1020lm	86 x 55 x 298( 55 / 175)
LMLP06-15	15W	1275lm	86 x 75 x 288( 75 / 165)
LMLP06-20	20W	1700lm	86 x 75 x 298( 75 / 175)
LMLP06-25	25W	2125lm	103 x 95 x 308( 95 / 185)
LMLP06-30	30W	2550lm	103 x 95 x 318( 95 / 195)

# LED TRACK LIGHT



## TRACKY DECO


LED Track Deco made of diecast aluminum body • Available with Gold, Black, Honeycomb louver and wall washer ring • Colour - Matt white, Matt grey, Matt black Also available in 4000K / 5000K • Operating temperature (Ta): -20°C / +45°C Safety Class II • Voltage: 100-240V



Gold  
LM-R-01G





Black  
LM-R-01B




Honeycomb  
LM-G-01H



Wall Wash Ring  
LM-G-01W

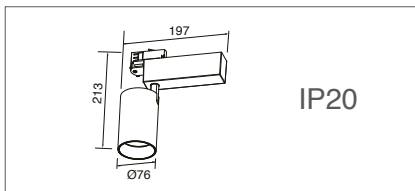

Super Narrow



Narrow



Medium

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/W
LM-LTD-12.5-830	12.5W	1000Lm	15°/24°/38°	80	3000K	90
LM-LTD-17-830	17W	1600Lm	15°/24°/38°	80	3000K	90
LM-LTD-26-830	26W	2400 Lm	18°/30°/60°	80	3000K	90

Led Power: 12.5W - 26W  
1000Lm-2400Lm  
Light distribution:  
Super Narrow, Narrow,  
Medium

## ACCESSORIES

**LMT-1-T/L or LMT 1-T/R**  
T connector




**LMT-1X**  
X connector




**LMT-1N**  
End cap



**LMT-S-1M-B-3C**  
Aluminium alloy 4 wire track

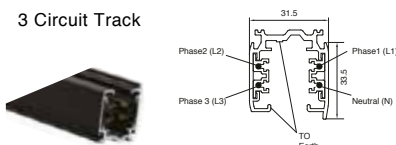

**LMT1-C/L or LMT1-C/R**  
Power adaptor



**LMT-1-I**  
Small straight connector



Available in Recessed / Surface - 1Mtr, 2Mtr, 3Mtr. Colour: White, Gray, Black. 3Circuit /DALI

**LMT1-IL**  
Big straight connector



**LMT1-A**  
Adjustable connector




**LMT1-L/L or LMT1-L/R**  
L connector





SAA RoHS CE

## ASTRA

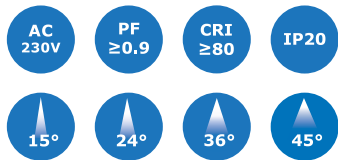


### ► | CCT

2700K | 3000K | 4000K | 6500K


### ► | Model, Power, Lumen & Size

(AxBxCmm)

LMAS-15	15W	1470lm	102x68x160
LMAS-25	25W	2600lm	146x90x212
LMAS-35	35W	3450lm	161x105x215
LMAS-45	45W	4410lm	161x105x215




# MAGNETIC TRACK LIGHT

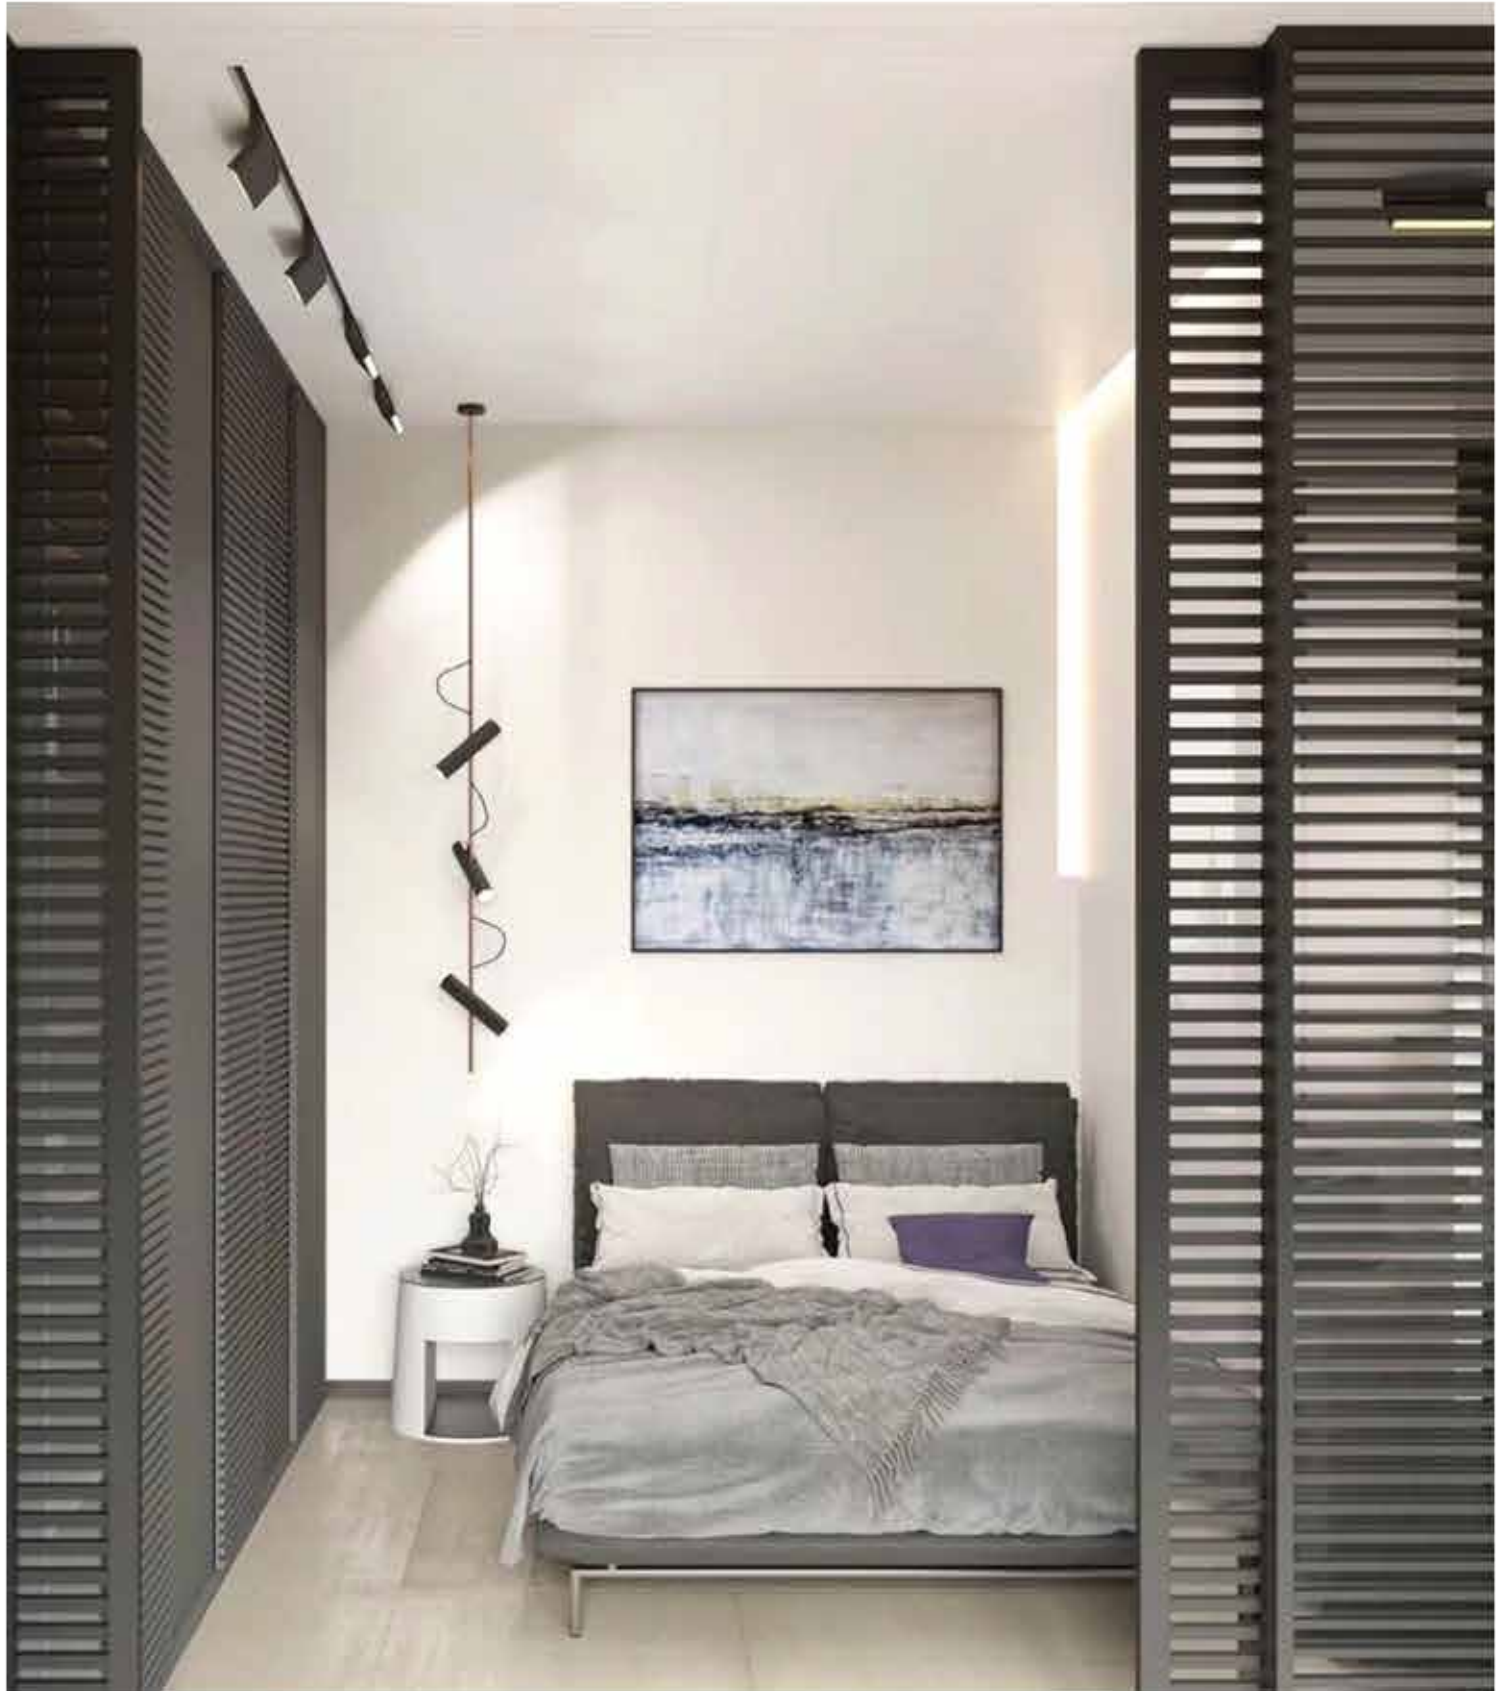

# MAGNETIC PRO

## Surface

Minimal architectural lighting channel that can be equipped with a wide range of LED Luminaires

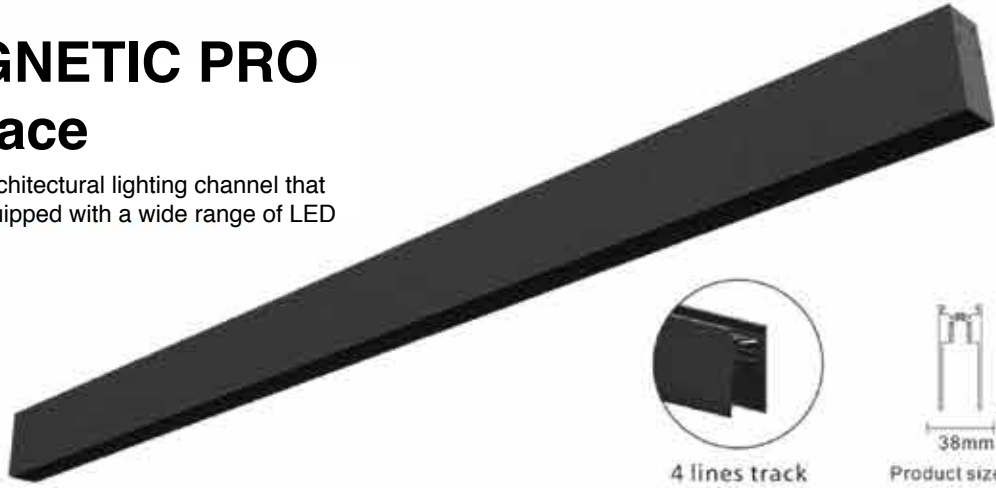

4 lines track



Product size [mm]

Input Voltage	DC48V
max track joint length	60M
max track bear wattage	600W
available sizes	1M/2M/3M
installation: Surface mounted	Suspendant




# MAGNETIC-R35

## Recessed



4 lines track



Product size [mm]


Input Voltage	DC48V
max track joint length	60M
max track bear wattage	600W
available sizes	1M/2M/3M
installation: Recessed mounted	Dressing





# MAGNETIC TRACK LIGHT

## MAGNETIC-M20 Surface




Product size [mm]

Input Voltage	DC48V
max track joint length	60M
max track bear voltage	600W
available sizes	1M/2M/3M
installation: Surface mounted	Suspendant



## MAGNETIC-R20 Recessed



Product size [mm]

Input Voltage	DC48V
max track joint length	60M
max track bear voltage	600W
available sizes	1M/2M/3M
installation: Recessed mounted	Dressing



























Code	Picture	Wattage	Input voltage		Finish	BEAM ANGLE	SIZE
LMMT-1-6-CCT		6	DC 48V		black	20°	L151*W22*H25mm
LMMT 2-12-CCT		12	DC 48V		black	20°	L302*W22*H25mm
LMMT 3-8-CCT		8	DC 48V		black	20°	L300*W22*H25mm
LMMT 4-16-CCT		16	DC 48V		black	20°	L600*W22*H25mm
LMMT 5-12-CCT		12	DC 48V		black	20°	ø52*L100*H107mm
LMMT 5-20-CCT		20	DC 48V		black	20°	ø62*L150*H156mm








# MAGNETIC TRACK LIGHT

LMMT 6-24-CCT		24	DC 48V		black	20°	L335*W305*H50.5mm
LMMT 7-20-CCT		20	DC 48V		black	20°	L270*W34*H50.5mm
LMMT 8-30-CCT		30	DC 48V		black	20°	L405*W34*H50.5mm
Code		Wattage	Input voltage		Finish	BEAM ANGLE	SIZE
LMMT 9-10-CCT		10	DC 48V		black	20°	L151*W35*H25mm
LMMT 10-20 CCT		20	DC 48V		black	20°	L302*W35*H25mm
LMMT 11-10 CCT		10	DC 48V		black	20°	L136*W35*H140mm
LMMT 12-20-CCT		20	DC 48V		black	20°	L270*W35*H140mm
LMMT 13-08-CCT		8	DC 48V		black	20°	L173.5*W34*H58.6mm
LMMT14-12-CCT		12	DC 48V		black	20°	ø52*100*110mm
LMMT 15-20-CCT		20	DC 48V		black	20°	ø62*150*160mm
LMMT-16-30-CCT		30	DC 48V		black	20°	ø72*170*165mm

# LED LINEAR LIGHT





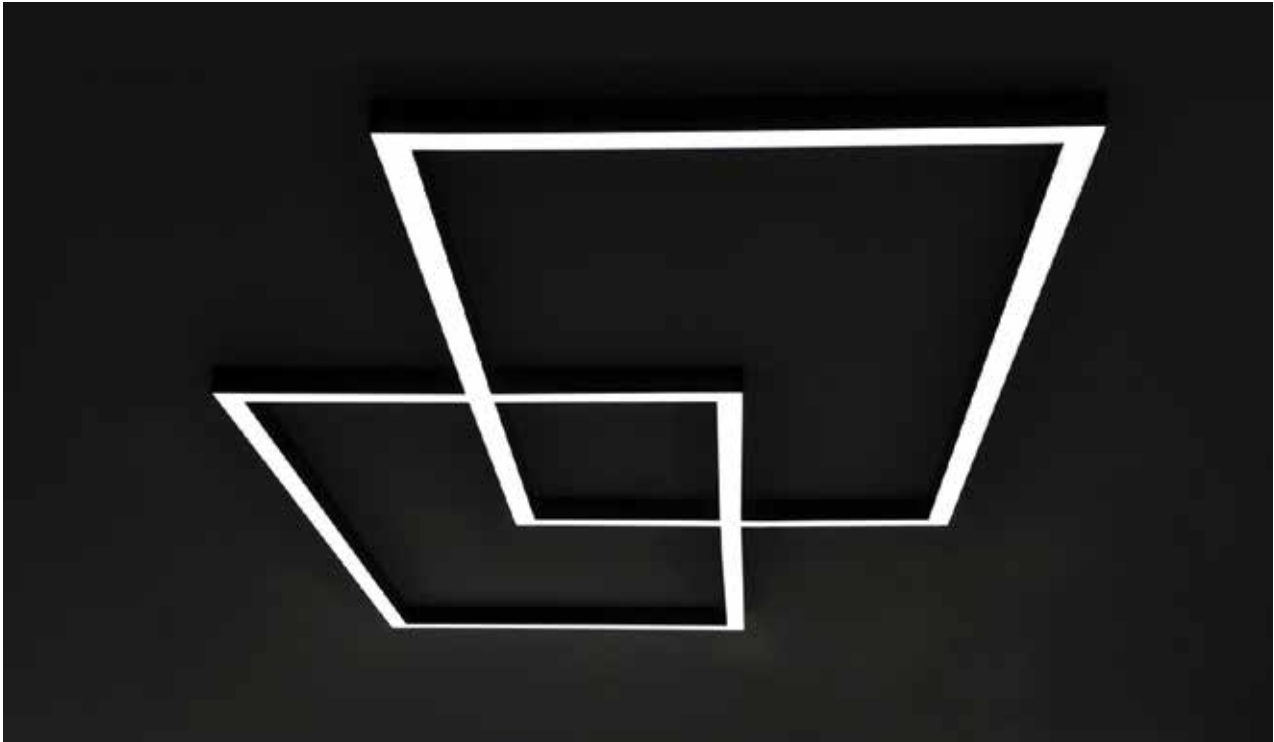

## LUMI LINEAR

LED linear light made of high quality extruded die-cast aluminum body with opal PC diffuser.

Match with different LED drivers according to needs - 0/1-10V &

DALI dimming is available.

Lifespan 50,000 Hrs

Has a wide range of Pendant, Recessed (Trim & trimless), Surface mounted profiles, along with wall mounted, wall washers.

Finishing Colour Aluminum Anodizing / Silver Gray / White / Black


Standard available lengths:

600/1200/1450/1800/2400mm





# LED LINEAR LIGHT


## ACCESSORIES

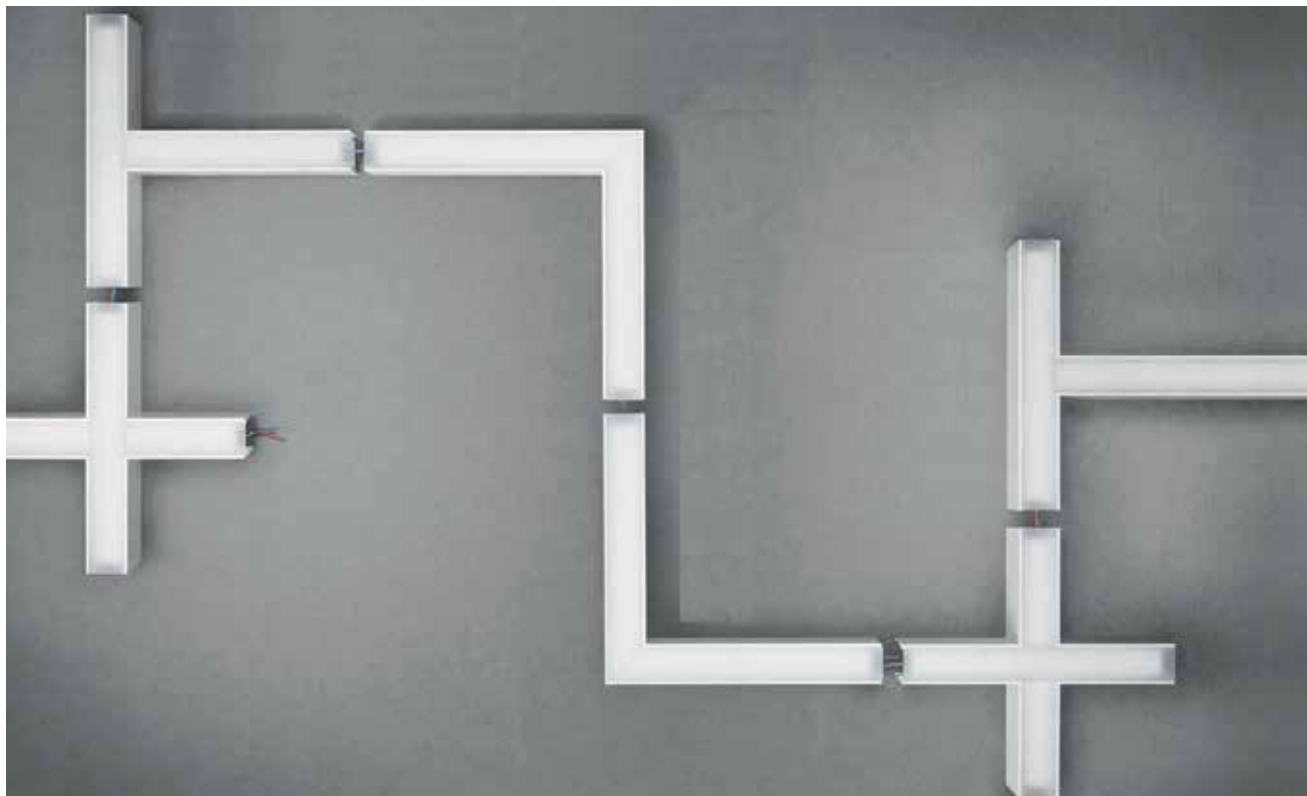


CONNECTING JOINTS -  
for recessed /Surface/Pendent

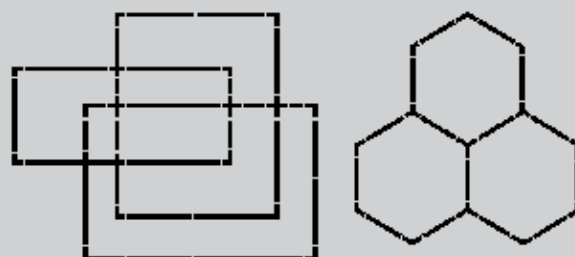


straight  
connection




90degree  
connection



120degree  
connection





Tshape  
connection



+shape  
connection



**RECESSED PROFILE with trim and trimless**

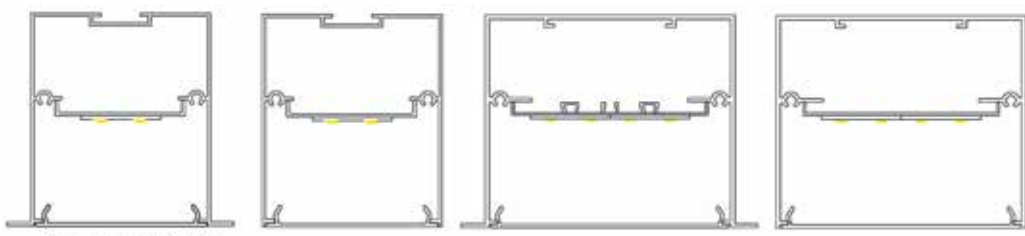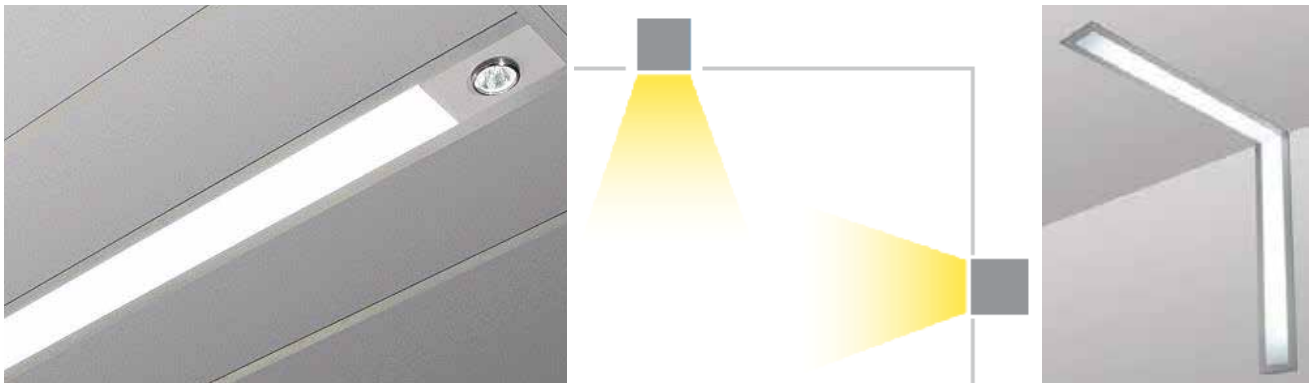

**Linear R-68**  
recessed with trim  
width excluding trim size: 68mm  
width including trim size: 86mm  
height 80mm


**Linear R-68 Trimless**  
recessed trimless  
width: 68mm  
height 80mm

**Linear R-95**  
recessed with trim  
width excluding trim size: 95mm  
width including trim size: 112mm  
height 80mm

**Linear R-95 Trimless**  
recessed trimless  
width 68mm  
height 80mm

# LED LINEAR LIGHT

## LINEAR S 68

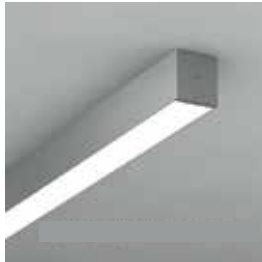

SURFACE PROFILE

Model No.	Wattage	Lumen	Dimension(mm)	CRI	CCT	Lm/w
LM-LLLS68-0.6-10-CCT	10W	1250 Lm	600x68x80	80	3000,4000, 5000K	125Lm/W
LM-LLLS68-0.9-14-CCT	14W	1750 Lm	900x68x80	80	3000,4000, 5000K	125Lm/W
LM-LLLS68-1.2-20-CCT	20W	2500 Lm	1200x68x80	80	3000,4000, 5000K	125Lm/W
LM-LLLS68-1.45-24-CCT	24W	3000 Lm	1450x68x80	80	3000,4000, 5000K	125Lm/W

*Can be used as wall mounted with additional wall mounting kit.*

## LINEAR R 68 Trim / Trimless




RECESSED PROFILE

Model No.	Wattage	Lumen	Dimension(mm)	CRI	CCT	Lm/w
LM-LLLR68-0.6-10-CCT	10W	1250 Lm	600x80	80	3000,4000, 5000K	125Lm/W
LM-LLLR68-0.9-14-CCT	14W	1750 Lm	900x80	80	3000,4000, 5000K	125Lm/W
LM-LLLR68-1.2-20-CCT	20W	2500 Lm	1200x80	80	3000,4000, 5000K	125Lm/W
LM-LLLR68-1.45-24-CCT	24W	3000 Lm	1450x80	80	3000,4000, 5000K	125Lm/W

(Available in Trim with 86mm width / Trimless with 68mm width)


## LINEAR P 68

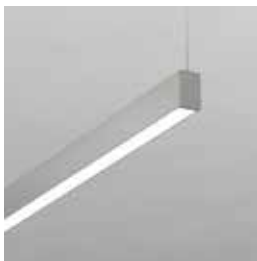

PENDENT PROFILE

Model No.	Wattage	Lumen	Dimension(mm)	CRI	CCT	Lm/w
LM-LLLP68-0.6-10-CCT	10W	1250 Lm	600x68x80	80	3000,4000, 5000K	125Lm/W
LM-LLLP68-0.9-14-CCT	14W	1750 Lm	900x68x80	80	3000,4000, 5000K	125Lm/W
LM-LLLP68-1.2-20-CCT	20W	2500 Lm	1200x68x80	80	3000,4000, 5000K	125Lm/W
LM-LLLP68-1.45-24-CCT	24W	3000 Lm	1450x68x80	80	3000,4000, 5000K	125Lm/W

## LINEAR P 68 UPDOWN 145/100



PENDENT PROFILE

Model No.	Wattage	Lumen	Dimension(mm)	CRI	CCT	Lm/w
LM-LLLP68UD-0.6-20-CCT	20W	1250 Lm/1250 Lm	600x68x80	80	3000,4000, 5000K	125Lm/W
LM-LLLP68UD-0.9-28-CCT	28W	1750 Lm/1750 Lm	900x68x80	80	3000,4000, 5000K	125Lm/W
LM-LLLP68UD-1.2-40-CCT	40W	2500 Lm/2500 Lm	1200x68x80	80	3000,4000, 5000K	125Lm/W
LM-LLLP68UD-1.45-48-CCT	48W	3000 Lm/3000 Lm	1450x68x80	80	3000,4000, 5000K	125Lm/W

(Available in 145mm & 100mm)

*Can be used as wall mounted with additional wall mounting kit.*



## LINEAR R 95 Trim / Trimless



RECESSED PROFILE

Model No.	Wattage	Lumen	Dimension(mm)	CRI	CCT	Lm/w
LM-LLLR95-0.6-20-CCT	20W	2500 Lm	600x80	80	3000,4000, 5000K	125Lm/W
LM-LLLR95-0.9-28-CCT	28W	3500 Lm	900x80	80	3000,4000, 5000K	125Lm/W
LM-LLLR95-1.2-40-CCT	40W	5000 Lm	1200x80	80	3000,4000, 5000K	125Lm/W
LM-LLLR95-1.45-48-CCT	48W	6000 Lm	1450x80	80	3000,4000, 5000K	125Lm/W

(Available in Trim with 112mm width / Trimless with 95mm width)

## LINEAR P 95



PENDENT PROFILE

Model No.	Wattage	Lumen	Dimension(mm)	CRI	CCT	Lm/w
LM-LLLP95-0.6-20-CCT	20W	2500 Lm	600x95x80	80	3000,4000, 5000K	125Lm/W
LM-LLLP95-0.9-28-CCT	28W	3500 Lm	900x95x80	80	3000,4000, 5000K	125Lm/W
LM-LLLP95-1.2-40-CCT	40W	5000 Lm	1200x95x80	80	3000,4000, 5000K	125Lm/W
LM-LLLP95-1.45-48-CCT	48W	6000 Lm	1450x95x80	80	3000,4000, 5000K	125Lm/W

Can be used as wall mounted with additional wall mounting kit.



# LED CEILING & WALL DECO

## SURFACE BETA

Made of High quality die-cast aluminum housing body, ensure excellent heat dissipation.

Long lifespan 50,000 hours, 5 years warranty.  
Excellent precision optical design with high quality reflector Built in driver,  
DALI Dimming, intelligent control functions for optional tiltable  
to satisfy different direction lighting requirements.



SB01



SB02



SB03

### FEATURES


Available with DALI dimming Life span: 50,000 Hrs High efficiency reflector Protection level is IP20/ IP44/IP65



## SB01



○ White ● Black





Model no.	Power	Lumen	Dimension (mm)
LMSB01-8-CCT	8W	680lm	55x55x165
LMSB01-15-CCT	15W	1275lm	75x75x165
LMSB01-20-CCT	20W	1700lm	95x95x165




## SB02



○ White ● Black




Model no.	Power	Lumen	Dimension (mm)
LMSB02-12-CCT	12W	1020lm	Φ79x155
LMSB02-18-CCT	18W	1275lm	Φ89x155

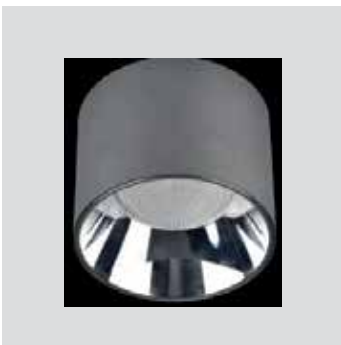

## SB03




○ White ● Black



Model no.	Power	Lumen	Dimension (mm)
LMSB03-30	30W	2700lm	Φ131x102

# LED CEILING & WALL DECO

WALL LINE- A



**Character Optional**



**Surface Finish**


Sand White  
Sand Grey  
Sand Black

**Flux @ 3000K / CRI 80**

110~230V AC 50/60 Hz, Aluminum Wall Light

Model	Power	Flux (Lm)	Dimension (mm)
LM-WLA11-830	11W	660lm	L300 x W26.5 x H50
LM-WLA21-840	21W	1600lm	L600 x W26.5 x H50

WALL LINE- B




**330LM @ 3000K / CRI 80**

110~230V AC 50/60 Hz, 8W, Aluminum Wall Light

Model	Power	Flux (Lm)	Dimension (mm)
LM-WLB8-830	8W	330lm	L146 x W60 x H87

WALL LINE- C




**560LM @ 3000K / CRI 80**

230~110V AC 60/50 Hz, 8W, Aluminum Wall Light

Model	Power	Flux (Lm)	Dimension (mm)
LM-WLC8-830	8W	560lm	Φ165 x 55

WALL LINE- D




**330LM @ 3000K / CRI 80**

230~110V AC 60/50 Hz, 8W, Aluminum Wall Light

Model	Power	Flux (Lm)	Dimension (mm)
LM-WLD8-830	8W	560lm	L148.5 x W60 x H88

## CEILING LINE- A



### Character Optional



### Surface Finish


Sand White  
Sand Grey  
Sand Black

### Flux @ 3000K / CRI 80 / 35° Beam

Aluminum Ceiling Light, Head Fixed

Model	Power	Flux (Lm)	Dimension (mm)
LM-CLA15-830	15W	1095lm	Φ76 x 190
LM-CLA20-830	20W	1400lm	Φ76 x 190

## CEILING LINE- B




### 840LM @ 3000K / CRI 80 / 35° Beam / Tilttable 60°

110~230V AC 50/60 Hz, 12W, Aluminum Tilted and Rotatable Ceiling Light

Model	Power	Flux (Lm)	Dimension (mm)
LM-CLB12-830	12W	840lm	Φ100 x 50 x 50

## CEILING LINE- C




### Flux @ 3000K / CRI 80 / 50° Beam

110~230V AC 50/60 Hz, Aluminum Ceiling Light, Head Fixed

Model	Power	Flux (Lm)	Dimension (mm)
LM-CLC26-830	26W	1880lm	L130 x W130 x H133
LM-CLC40-830	40W	3720lm	L160 x W160 x H162

## CEILING LINE- D




### 510LM @ 3000K / CRI 80 / 25° Beam

110~230V AC 50/60 Hz, 17W, Aluminum Ceiling Light, Head Fixed

Model	Power	Flux (Lm)	Dimension (mm)
LM-CLD17-830	17W	510lm	164 x 34 x 63

### Surface Finish



# LED CEILING LIGHT







## ISOLA



Made of PC body with frosted diffuser.

### ► | Size & Power & Lumen

LMPD12-25CCT	12"	25W	2000lm
LMPD16-35CCT	16"	35W	3220lm

### ► | CCT

3000K | 4000K | 6500K

### ► | Size

(Inch)

12"(A)

12"(B)

16"(A)

16"(B)

&

Size


(AxBxCmm)

ø298x51


ø298x51x1500

ø400x67


ø400x67x1500



AL24A



AL24B

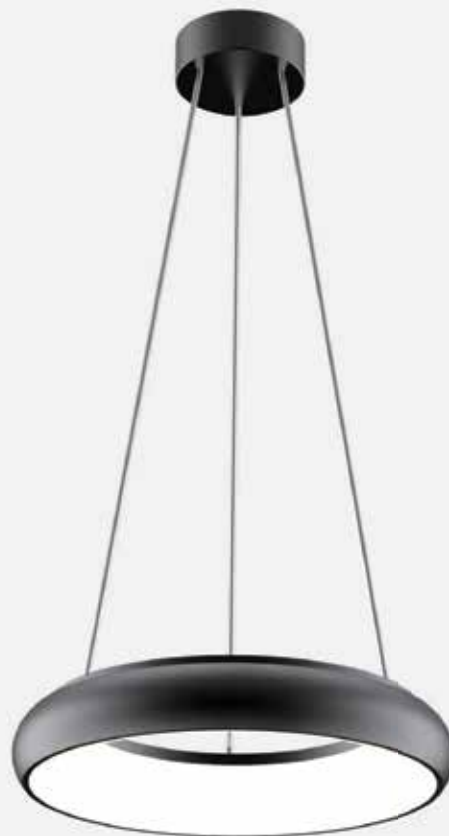

# LED CEILING LIGHT




## KREON



RoHS



Made of PC body with frosted diffuser.




### ► | Size & Power & Lumen & Size

(Inch)	Model			(AxBmm)
10"	LMBW-10-12-CCT	12W	1280lm	Ø270x70
12"	LMBW-12-18-CCT	18W	1940lm	Ø320x70
	LMBW-12-25-CCT	25W	2700lm	

### ► | CCT

1-CCT : 3000K | 4000K | 6500K





# LED CEILING LIGHT



## EOS



Made of PC body with frosted diffuser.




### ► | Size & Power & Lumen & Size

(Inch)	Model			(AxBmm)
10'	LMDC-10-12-CCT	12W	1200lm	Ø250x53
12"	LMDC-12-18-CCT	18W	1900lm	Ø300x58
	LMDC-12-25-CCT	25W	2560lm	
16"	LMDC-16-25-CCT	25W	2550lm	Ø400x66
	LMDC-16-30-CCT	30W	3020lm	

### ► | CCT

1-CCT : 3000K | 4000K | 6500K







# LED STRIP LIGHT





## LED FLEX

LED Flex range has extensive colour temperature gradations and different brightness classes, you can find the ideal LED Strip for every lighting concept.

## FEATURES

Smooth dimming control

5m Roll

Also available in 22W/m & 28W/m

RGBW- RGB colour changing options with Warm white - 3000K & White - 6000K

CCT - adjustable white colour temperature control from 2700K - 6500K

Adjustable white colour temperature control

RGB with multiple colour changing option

Mono colour - 3000K, 4000K, 6500K

High powered light output

3M self-adhesive backing

IP20 protection | IP65 protection

Ideal for diverse colour control for both utility and ambient lighting applications

Life span - 30000 hrs 3 Years warranty / 50,000 hrs 5 Years warranty.



# LED STRIP LIGHT

## SPECIFICATIONS

LF - WATTAGE - COLOUR - VOLTAGE - IP

RGBW 5050 60LED/M Strip Light 120° beam angle (High power RGB with 3000/6500K colour options)

Model Number	Power	Voltage	Colour	Lumen	Protection	Dimensions
LMLF-14-RGBWW	14.4w	12v/24v	RGB+WW (3000K)	1800lm	IP20/IP65/IP68	5000 x 10 x 2mm
LMLF-14-RGBW	14.4w	12v/24v	RGB+W (6500K)	1800lm	IP20/IP65/IP68	5000 x 10 x 2mm

RGB 5050 60LED/M Strip Light 120° beam angle (High power RGB)

Model Number	Power	Voltage	Colour	Lumen	Protection	Dimensions
LMLF-14 - RGB	14.4w	12v/24v	RGB	R-90, G210, B-40lm	IP20/IP65/IP68	5000 x 10 x 2m

CCT Adjustable - Tunable White 60 LED 120° beam angle

Model Number	Power	Voltage	Colour	Lumen	Protection	Dimensions
LMLF-14-CCT	14.4w	12v/24v	2700-6500K	1800 lm	IP20/IP65/IP68	5000 x 10 x 2mm

Mono colour (2835/3528/5050)

Model Number	Power	Voltage	Colour	Lumen	Protection	Dimensions
LMLF-4.8-V-CCT-IP	4.8w	12v/24v	3000K/4000K/6000K	580lm	IP20/IP65/IP68	5000 x 10 x 2mm
LMLF-7.2-V-CCT-IP	7.2w	12v/24v	3000K/4000K/6000K	860lm	IP20/IP65/IP68	5000 x 10 x 2mm
LMLF-9.6-V-CCT-IP	9.6w	12v/24v	3000K/4000K/6000K	1150lm	IP20/IP65/IP68	5000 x 10 x 2mm
LMLF-14.4-V-CCT-IP	14.4w	12v/24v	3000K/4000K/6000K	1700lm	IP20/IP65/IP68	5000 x 10 x 2mm

## Neon LED Flex



Beam angle:  
160° diffusion angle, no light spot  
180°C Frame resistance  
UV resistance  
Solvent/saltwater resistance  
Protection grade: IP67 and IK08



Model Number	Power	Voltage	Colour	Lumen	Protection	Dimensions
LMNLF-9.6WW	9.6w	24v	3000K	350lm/M	IP67	5 Mtr/10 Mtr
LMNLF-9.6RGB	9.6w	24v	RGB	-	IP67	5 Mtr/10 Mtr



### Driver & Controller

Model No: LMLFTOUCH-RGBW  
 Touch panel RGB/ RGBW controller  
 Voltage: DC12~24V  
 Static power consumption: <1W  
 Output Power: 12V: <144W 24V: <288W



### Driver & Controller

Model No: LMLFTOUCH-CCT  
 Touch panel colour temperature  
 from 2700-6500K  
 Voltage: DC12~24V  
 Static power consumption: <1W  
 Output Power: 12V: <96W 24V: <192W



### Driver & Controller

Model No: LMLFTOUCH-Mono  
 Touch panel dimmer  
 Voltage: DC12~24V  
 Static power consumption: <1W  
 Output Power: 12V: <144W 24V: <288W



### Driver & Controller

Model No: LMLFTOUCH-IR-RGB  
 Touch panel dimmer  
 Voltage: DC12~24V  
 Static power consumption: <1W  
 Output Power: 12V: <216W 24V: <432W



# ACCESSORIES



## Driver & Controller

Model No: LMLF TOUCH IRCCT  
 Touchpanel Dimmer  
 Voltage: DC5V 12~24V  
 Static power consumption: <1W  
 Output Power: 12V: <216W 24V: <432W



## Decoder

Model No: LMLF- DMX 512  
 Digital tube DMX512  
 RGB, RGBY, RGBW, RGBA"  
 Voltage: DC5V 12~24V  
 Static power consumption: <1W  
 Output Power: 12V:<192W 24V:<384W



## Decoder

Model No: LMLF-DMX512-4CH  
 4Ch DMX512 decoder RGBW  
 Voltage: DC5V 12~24V



## Amplifier

Model No: LMLF-AMF-L4-RGBW  
 Voltage: DC5V 12~24V  
 4 Circuit (+RBGW)  
 Static power consumption: <1W  
 Output Power: 12V:<288W 24V:<576W



## Amplifier

Model No: LMLF-AMF-L-RGB  
 Voltage: DC5V 12~24V  
 3 Circuit (R/G/B/+)  
 Static power consumption: <1W  
 Output Power: 12V:<144W 24V:<288W



## Amplifier

Model No: LMLF-DMX512-4CH  
 4Ch DMX512 decoder RGBW  
 Voltage: DC5V 12~24V  
 Static power consumption: <1W  
 Output Power: 12V:<192W 24V:<384W



## Wifi Smart light

Model No: LMLF-WIFI-01  
 Control Wire Mobile App  
 Voltage: DC12~24V  
 RGB  
 Static power consumption:  
 <1W  
 Output Power:  
 12V:<216W 24V:<432W



## Driver

Model No.	Voltage	Watts	IP Rating
LMLF6024-V	24V	60W	IP20
LMLF10024-V	24V	100W	IP20
LMLF18024-V	24V	180W	IP20
LMLF18024-V IP	24V	180W	IP67
LMLF18012-V IP	12V	180W	IP67
<b>DALI DIMMABLE</b>			
LMLF18024-V	24V	180W	IP20





PROFILE 240




PROFILE 240RGB




PROFILE 6FLEXI




PROFILE 7

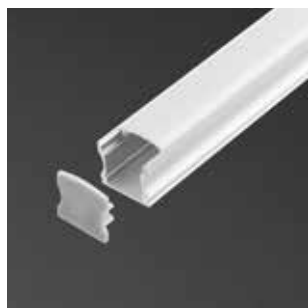


PROFILE 15

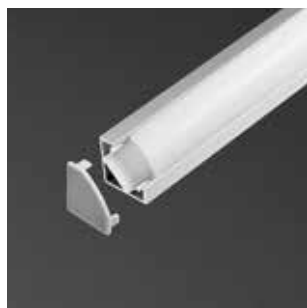

PROFILE 45

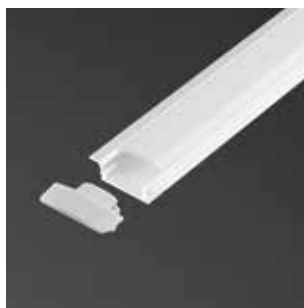

PROFILE 12WL

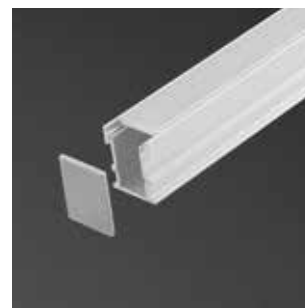

PROFILE 26FL

## Installation

Surface mounted and recessed profiles include fixing clips and end caps

Profile 240 requires fixing adhesive or screws

## Specification

Model	Colour	Material	Protection	Length	Dimensions
PROFILE 240	Silver	Aluminium	IP20	1m   2m	9 x 15 mm
PROFILE 240RGB	Silver	Aluminium	IP20	1m   2m	9 x 18 mm
PROFILE 6FLEXI	White	Aluminium   Polycarbonate	IP20	1m   2m	6 x 18 mm
PROFILE 7	Silver   White	Aluminium   Polycarbonate	IP20	1m   2m	7 x 18 mm
PROFILE 15	Silver   White	Aluminium   Polycarbonate	IP20	1m   2m	15 x 18 mm
PROFILE 45	Silver   White	Aluminium   Polycarbonate	IP20	1m   2m	18 x 18 mm
PROFILE 12WL	White	Aluminium   Polycarbonate	IP20	2m	12 x 16 mm
PROFILE 26FL	Silver	Aluminium   Polycarbonate	IP20	2m	26 x 21.3 mm

# LED FLOOD LIGHT





## FOCSY - SMD

High efficient LED flood light suitable for outdoor and indoor area lighting.

Body made of die-cast aluminum, black powder coated with toughened glass.

With high quality SMD chips.

Save up 80% energy have better lighting characteristics than traditional metal halid.

### Features

Slim & Compact design


Instant start, No flickering

High strength and impact resistance


Life span: 50,000 hrs

IP 65


Working temperature: -40°C to 60°C

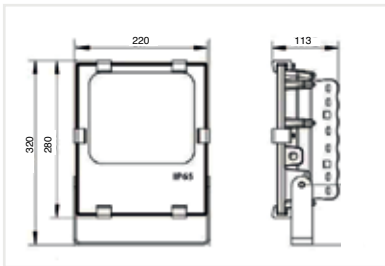

Model No.	Wattage	Lumen	Beam Angle	CCT	Lm/w
LM-FLS50-830	50W	5250 Lm	120°	3000K	105Lm/W
LM-FLS50-840	50W	5350 Lm	120°	4000K	107Lm/W
LM-FLS50-865	50W	5500Lm	120°	6500K	110Lm/W

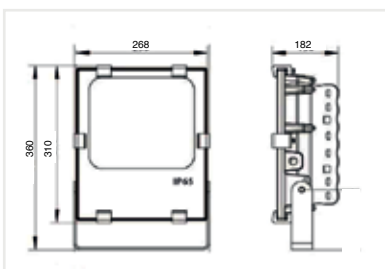

Model No.	Wattage	Lumen	Beam Angle	CCT	Lm/w
LM-FLS100-830	100W	9000 Lm	120°	3000K	90Lm/W
LM-FLS100-840	100W	9200 Lm	120°	4000K	92Lm/W
LM-FLS100-865	100W	9500 Lm	120°	6500K	95Lm/W

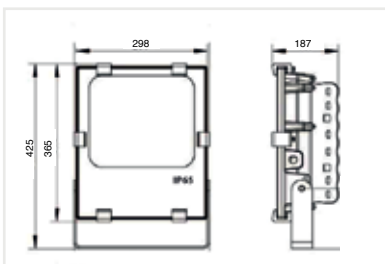

Model No.	Wattage	Lumen	Beam Angle	CCT	Lm/w
LM-FLS150-830	150W	13500 Lm	120°	3000K	90Lm/W
LM-FLS150-840	150W	14000 Lm	120°	4000K	93Lm/W
LM-FLS150-865	150W	15000 Lm	120°	6500K	100Lm/W

# LED PROJECTORS



Outdoor projector, ideal for accent lighting made of die-cast aluminum body black powder coated, with PC lens & tempered glass.  
IP66, IK08  
Working temperature: -40°C to 50°C  
Life Span: 50,000 Hrs





## ROCI PRO

Model No.	Wattage	CCT	Lm/w	LEDs	Dimension
LM-LRP-36-CCT	36W	3K/4K/5K/RGB/RGBW	>80Lm/W	18pcs	Φ180xH255
LM-LRP-54-CCT	54W	3K/4K/5K/RGB/RGBW	>80Lm/W	18pcs	Φ180xH255
LM-LRP-72-CCT	72W	3K/4K/5K/RGB/RGBW	>80Lm/W	36pcs	Φ212xH300
LM-LRP-108-CCT	108W	3K/4K/5K/RGB/RGBW	>80Lm/W	36pcs	Φ212xH300
LM-LRP-162-CCT	162W	3K/4K/5K/RGB/RGBW	>80Lm/W	60pcs	Φ280xH345
LM-LRP-216-CCT	216W	3K/4K/5K/RGB/RGBW	>80Lm/W	72pcs	Φ280xH345

Choose beam angle 6°/8°/12°/24°/30°/45°/60°



## ROCI PRO SQUARE

Outdoor projector, ideal for accent lighting made of die-cast aluminum body grey powder coated, with tempered glass lens.

IP66

Ambient temperature upto 50°C



Model No.	Wattage	Voltage	Lumen	CRI	CCT	Lm/w	BeamAngle
LM-LP-25-830	25W	240V	2000 Lm	80	3000K	80Lm/W	8°/15°/30°/60°/90
LM-LP-25-840	25W	240V	2000 Lm	80	4000K	80Lm/W	8°/15°/30°/60°/90
LM-LP-25-RGB	25W	DC24V	-	80	RGB	-	8°/15°/30°/60°/90
LM-LP-50-830	50W	240V	4000 Lm	80	3000K	80Lm/W	8°/15°/30°/60°/90
LM-LP-50-840	50W	240V	4000 Lm	80	4000K	80Lm/W	8°/15°/30°/60°/90
LM-LP-50-RGB	50W	DC24V	-	80	RGB	-	8°/15°/30°/60°/90



# LED WEATHERPROOF



WEATHERPROOF



## LED PARKADE

LED weatherproof light, made of strong & high quality Poly carbonate body and diffuser.

IK10

Life span: 50,000 Hrs

up to 120 Lm/W

Available in DALI Dimmable


Stainless steel fast release clips

Flicker-free instant start

Luminous Flux up to 7200Lm


TRI-PROOF



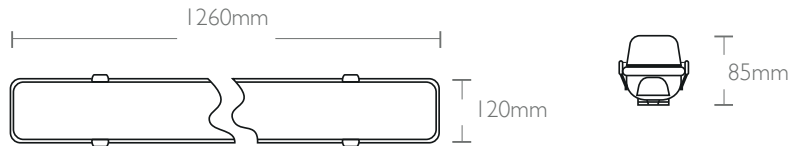


Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-PW40-830	40W	4400 Lm	120°	>80	3000K	110
LM-PW40-840	40W	4600 Lm	120°	>80	4000K	115
LM-PW40-865	40W	4800 Lm	120°	>80	6500K	120

### PARKADE WEATHERPROOF60- IP65

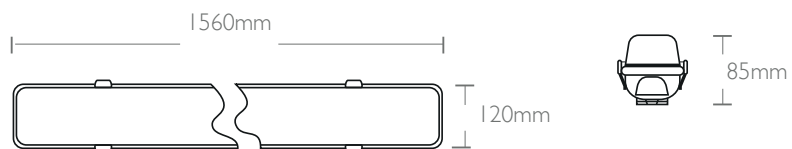

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-PW60-830	60W	6600 Lm	120°	>80	3000K	110
LM-PW60-840	60W	6900 Lm	120°	>80	4000K	115
LM-PW60-865	60W	7200 Lm	120°	>80	6500K	120

### PARKADE TRI-PROOF-IP65

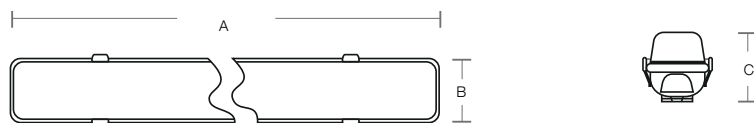

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w	A	B	C
LM-PT20-830	20W	2200 Lm	120°	>80	3000K	110	600	90	74
LM-PT20-840	20W	2300 Lm	120°	>80	4000K	115	600	90	74
LM-PT20-865	20W	2400 Lm	120°	>80	6500K	120	600	90	74
LM-PT40-830	40W	4400 Lm	120°	>80	3000K	110	1200	90	74
LM-PT40-840	40W	4600 Lm	120°	>80	4000K	115	1200	90	74
LM-PT40-865	40W	4800 Lm	120°	>80	6500K	120	1200	90	74
LM-PT60-830	60W	6600 Lm	120°	>80	3000K	110	1500	90	74
LM-PT60-840	60W	6900 Lm	120°	>80	4000K	115	1500	90	74
LM-PT60-865	60W	7200 Lm	120°	>80	6500K	120	1500	90	74

# LED HIGHBAY



## LED HIGHBAY - POLO

Attractive design compact, Black powder coated, Heavy duty die-cast aluminum housing with cover made of poly carbonate. It has been treated to eliminate glare without effecting performance.

### Features

- Easy installation for suspended mounting
- Extremely high system efficiency, up to 110lm/w
- Choice of two colour temperatures: white (4000K) and cool white (5000K)
- Available wide flood beam angles
- Long life time up to 50,000 Hrs
- Protection level is IP65
- Consumes 50% less energy than traditional metal halide Highbay.
- Compact design is great for installations with limited space.



LED Power: 75W  
Lumen: 8000Lm - 8200Lm  
IP Rating: IP65

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LHP75-840	75W	8000 Lm	115°	80	4000K	107Lm/W
LM-LHP75-850	75W	82000 Lm	115°	80	5000K	110Lm/W



LED Power: 100W  
Lumen: 10850Lm - 11200Lm  
IP Rating: IP65

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LHP100-840	100W	10850 Lm	120°	80	4000K	108Lm/W
LM-LHP100-850	100W	11200 Lm	120°	80	5000K	112Lm/W



LED Power: 150W  
Lumen: 16100Lm - 16600Lm  
IP Rating: IP65

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LHP150-840	150W	16100 Lm	120°	80	4000K	107Lm/W
LM-LHP150-850	150W	166200 Lm	120°	80	5000K	111Lm/W



LED Power: 200W  
Lumen: 22100Lm - 22800Lm  
IP Rating: IP65

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LHP200-840	200W	22100Lm	120°	80	4000K	109Lm/W
LM-LHP200-850	200W	22800 Lm	120°	80	5000K	112Lm/W



LED Power: 250W  
Lumen: 27000Lm - 28100Lm  
IP Rating: IP65

Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LHP250-840	250W	27000 Lm	120°	80	4000K	108Lm/W
LM-LHP250-850	250W	28100 Lm	120°	80	5000K	112Lm/W



# LED HIGHBAY



## LED HIGHBAY - APOLO

Attractive design compact, Black powder coated, Heavy duty die-cast aluminum housing with cover made of poly carbonate. It has been treated to eliminate glare without effecting performance.

### Features

- Easy installaion for suspended mounting
- Extremely high system efficiency, up to 140lm/w
- Available wide flood beam angles
- Long life time up to 50,000 Hrs
- Protection level is IP65
- Consumes 50% less energy than traditional metal halide Highbay.
- Compact design is great for installations with limited space.







Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LHAP50-830	50W	6500 Lm	60°/90°/120°	80	3000K	130Lm/W
LM-LHAP50-840	50W	6750 Lm	60°/90°/120°	80	4000K	135Lm/W
LM-LHAP50-865	50W	7000 Lm	60°/90°/120°	80	6500K	140Lm/W

LED Power: 50W, Lumen: 6500Lm - 7000Lm, IP Rating: IP65



Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LHAP100-830	100W	13000 Lm	60°/90°/120°	80	3000K	130Lm/W
LM-LHAP100-840	100W	13500 Lm	60°/90°/120°	80	4000K	135Lm/W
LM-LHAP100-865	100W	14000 Lm	60°/90°/120°	80	6500K	140Lm/W

LED Power: 100W, Lumen: 13000Lm - 14000Lm, IP Rating: IP65



Model No.	Wattage	Lumen	Beam Angle	CRI	CCT	Lm/w
LM-LHAP150-830	150W	19500 Lm	60°/90°/120°	80	3000K	130Lm/W
LM-LHAP150-840	150W	20259 Lm	60°/90°/120°	80	4000K	135Lm/W
LM-LHAP150-865	150W	21000 Lm	60°/90°/120°	80	6500K	140Lm/W

LED Power:150W, Lumen: 19500Lm - 21000Lm, IP Rating: IP65

## Accessories

LM-LHAP-LENS



LM-LHAP-ALUMINUM REFLECTOR



LM-LHAP-TRANSPARENT PC REFLECTOR



LM-LHAP- ADJUSTABLE BRACKET



LM-LHAP-DAY LIGHT SENSOR



LM-LHAP-IP65 MOTION SENSOR



LM-LHAP-IP42 MOTION SENSOR



# LED LINEAR HIGHBAY

## CORE LINE



50W



100W



150W



200W






## Made of die-cast aluminum body with PC diffuser


- ◆ The use of duct cooling design reduces the overall weight;excellent heat dissipation and low light decay effectively extend the service life
- ◆ Durable, long life span of 50,000 hours
- ◆ Fast response, no flicker; wide operating voltage range
- ◆ Each LED is packaged with multi-chips,high efficiency,stable performance and low light decay.

25°

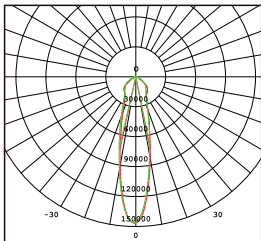


AVERAGE BEAM ANGLE (50%):24.0 DEG  
UNIT:cd  
— C0/180,23.9°  
— C90/270,24.2°

40°

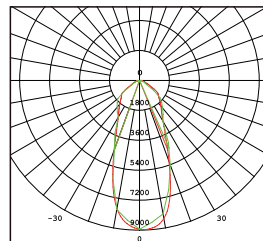


AVERAGE BEAM ANGLE (50%):42.9 DEG  
UNIT:cd  
— C0/180,42.1°  
— C90/270,43.6°

60°

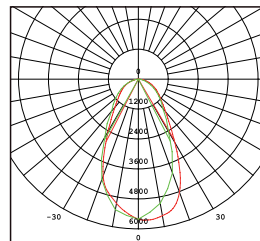

AVERAGE BEAM ANGLE (50%):57.3 DEG  
UNIT:cd  
— C0/180,57.9°  
— C90/270,56.6°

90°

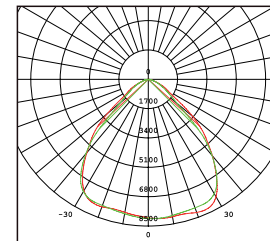

AVERAGE BEAM ANGLE (50%):91.4 DEG  
UNIT:cd  
— C0/180,93.0°  
— C90/270,89.8°

## Specification:

Model No.	Module (Qty.)	Power (W)	Luminous efficiency (Lm/W)	Dimension (mm)	N.W. (KG)
LM-HB0601-05	1	50W	150-160	260x105x195	2.5KG
LM-HB0602-10	2	100W	150-160	260x168x195	3.0KG
LM-HB0603-15	3	150W	150-160	260x258x195	4.0KG
LM-HB0604-20	4	200W	150-160	260x348x195	5.0KG
LM-HB0605-25	5	250W	150-160	438x260x195	6.0KG
LM-HB0606-30	6	300W	150-160	520x258x195	9.0KG
LM-HB0608-40	8	400W	150-160	520x348x195	11.0KG
LM-HB0610-50	10	500W	150-160	520x438x195	13.0KG

CCT (K)	3000K/4000K/5000K/6000K	Power Factor	>95%	Power Efficiency	88%~94%
CRI (Ra)	>70	IP Grade	IP66	LED Lifespan	≥50000h
Working Environment	-40°C~50°C · 20%~90% H.R.	Storage Temperature	-40°C~85°C		

# LED BULK HEAD



**LMBHO**



**LMBHF**





## BLITZ




### ► | CCT

3000K | 4000K | 6500K


Made of die cast aluminum body with PC diffuser

►   Model	Power	Lumen	Size (AxBxCmm)
LMBHO-10-12W	12W	1250lm	250x58x229
LMBHO-10-18W	18W	1850lm	250x58x229
LMBHF-10-12W	12W	1100lm	250x74x143

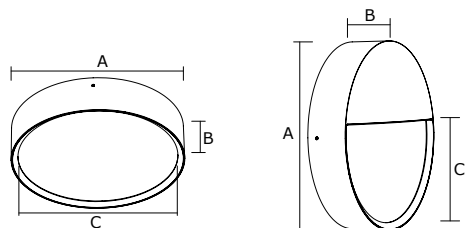



# LED BULK HEAD

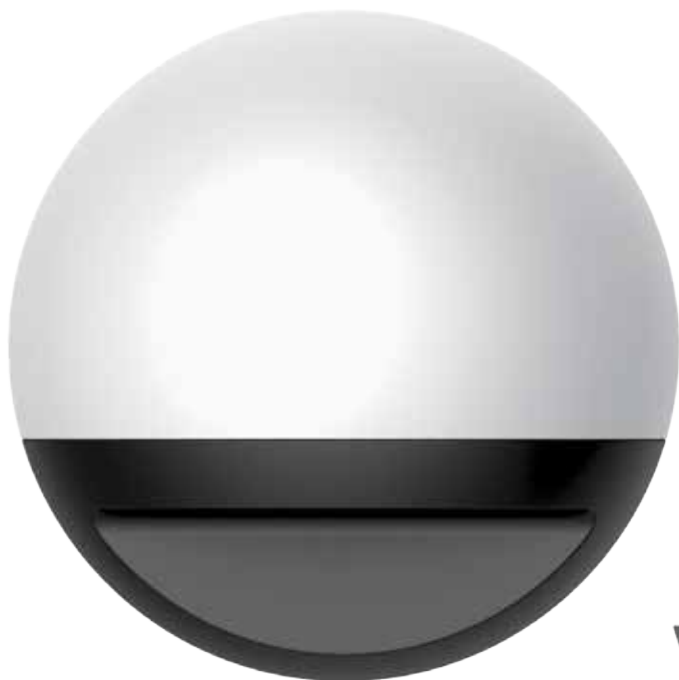

120°

**BHH**



60°

**BHF**





# VEDO




Made of PC body and diffuser

## ► | Model, Power, Lumen & Size (AxBxCmm)

LMBHF-12	12W(A)	1050lm	∅159x65.5
LMBHH-12	12W(B)	1110lm	158x70x66.5

## ► | CCT

3000K | 4000K | 6500K

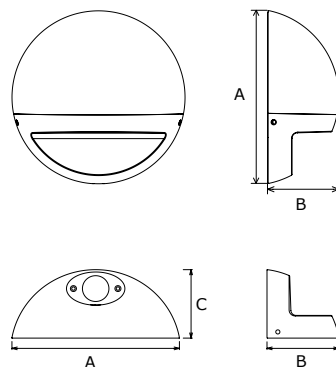


# LED STREET LIGHT



## LED STREET

Made of high quality die-cast aluminum body deep grey powder coated with tempered glass  
 Operating temperature -40°C to 50°C  
 IP 66, IK08  
 Power: 50W / 80W / 100W / 120W / 150W / 200W  
 Input Voltage: AC 85-265V 50/60Hz  
 LED Light Source: Epistar / Bridgelux COB  
 Driver: INVENTRONICS / MEAN WELL driver  
 Color Temperature: 4000K/5000K/5700K  
 Working Lifetime: >75,000 hrs  
 LED efficiency: >165lm/W  
 Luminaire : 125lm/W  
 CRI : >70

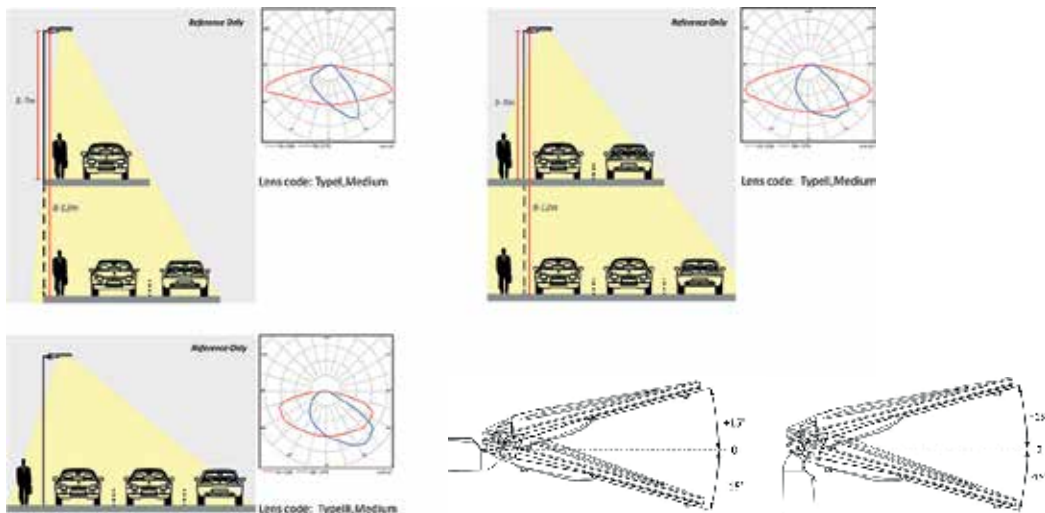

Model No.	Wattage	Lumen	CCT	Lm/w	Weight	Optics
LM-ST60	60W	7500 Lm	4000K/5000K/5700K	125Lm/W	7.8Kg	1M/2M/3M
LM-ST90	90W	11250 Lm	4000K/5000K/5700K	125Lm/W	8.1Kg	1M/2M/3M
LM-ST120	120W	15000 Lm	4000K/5000K/5700K	125Lm/W	8.2Kg	1M/2M/3M




A: Post Top Mounted




B: Pendant Mounted



C: Side Entry Mounted



D: Suspended Mounted



## LED URBAN STREET

Made of high quality die-cast aluminum body  
deep grey powder coated with tempered glass  
Operating temperature -40°C to 50°C



IP 66, IK08

Life span: 100,000 Hrs


Lumin: 130Lm/W

*Model Reference : LM-USL-Wattage-A/B/C & D*


# LED STREET LIGHT

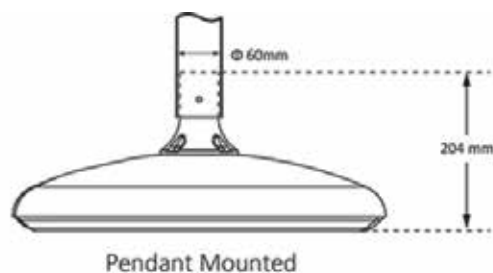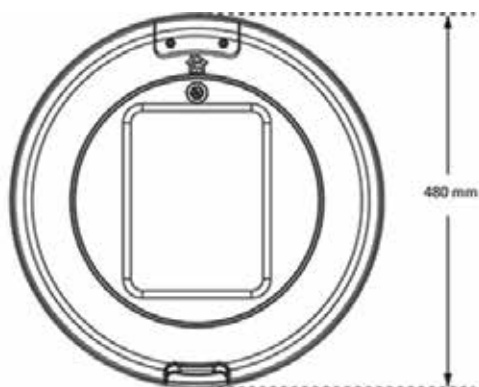


Pendant Mounted

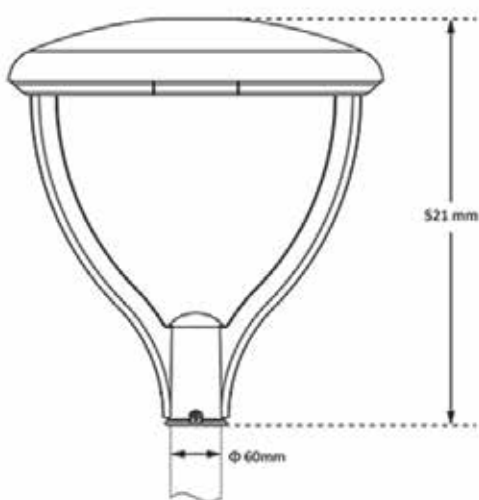

Post Top Mounted

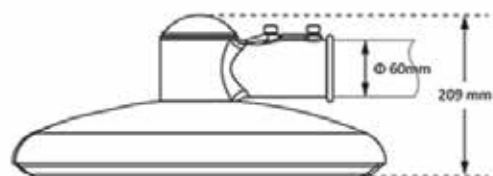

Side Entry Mounted

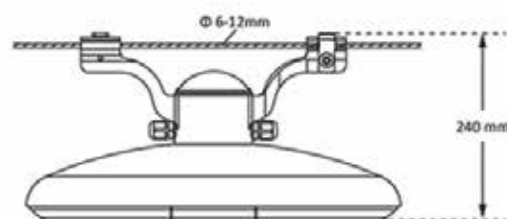

Suspended Mounted

Model No.	Wattage	Lumen	CCT	Lm/w	Optics
LM-USL-37-A/B/C/D	37W	4810Lm	3000K/4000K/5000K/5700K	130Lm/W	1M/2M/3M
LM-USL-56-A/B/C/D	56W	7280Lm	3000K/4000K/5000K/5700K	130Lm/W	1M/2M/3M

Available wattages 70W, 90W & 120W



# LED SOLAR BOLLARD



## SOLO Solar LED Bollard

High quality solar bollard suitable for extreme weather condition, made of die cast aluminum body with PC diffuser. IP66

### TECHNICAL SPECIFICATIONS

Solar Panel	: Mono crystal line Solar Bollard
LED	: 3.5W, EPISTAR CHIP
Life Span of LED	: 50,000 Hrs, L80B10
Luminous Flux	: 220 lm
Colour Temperature	: 3000K/4000K/6500K
Beam Angle	: 120°
Dimension	: 860x280mm
Battery	: 6.4V.5AH Life PO4 Lithium Battery
Discharging Time	: 23 Hours
Charging Time	: 8 Hrs
Net Weight	: 5.1 KG
Working Temperature	: -25°C-55°C



---

LUMINO LIGHTING LTD.  
Suit 54, 464 Edgware Road, London W2 1AH  
United Kingdom

[www.luminouk.com](http://www.luminouk.com)